

DS-K1T Series EHome Configuration in New iVMS-4200


Operation Process

- 1) Add device through TCP/IP.
- 2) Modify network center setting
- 3) Modify uploading mode
- 4) Add device again through EHOME protocol (not support sync face picture)

Operation Steps:

1. Add device through TCP/IP.

- a) Open Access Control module, click access control module
- b) Add device from list in the bottom, if the device is not activated, please activate first.



Refresh per 60s	Total (16)	IP	Device Model	Firmware Version	Security...	Port	Serial No.	Boot Time	Added	Operation
<input checked="" type="checkbox"/>		10.9.96.80	DS-K1T8003MF	V1.0.2build 190314	Active	8000	DS-K1T8003MF2019...	2019-05-07 05:23:16	No	

- c) Input device nickname, user name and activation password to add the device.

Add [X]

Name: 8003

IP Address: 10.9.96.80

Port: 8000

User Name: admin

Password: [Masked]

Synchronize Time

Import to Group


Set the device name as the group name and add all the channels connected to the device to the group.

[Add] [Cancel]

2. Modify network center setting
 - a) Enter Access Control → Advanced function → More parameters → select device. then go to network settings, modify the network center setting.


DS-K1T Series EHome Configuration in New iVMS-4200

- b) Address Type: Server domain name or IP Address
IP address: input server IP address
Port: default 7660 for iVMS-4200 client software,
Ehome version: EHome V5.0 support ehome key
Ehome key: set a password for communication (only Ehome V5.0 support)
Account: support any letters or digit, then click Save, it will prompt succeed.

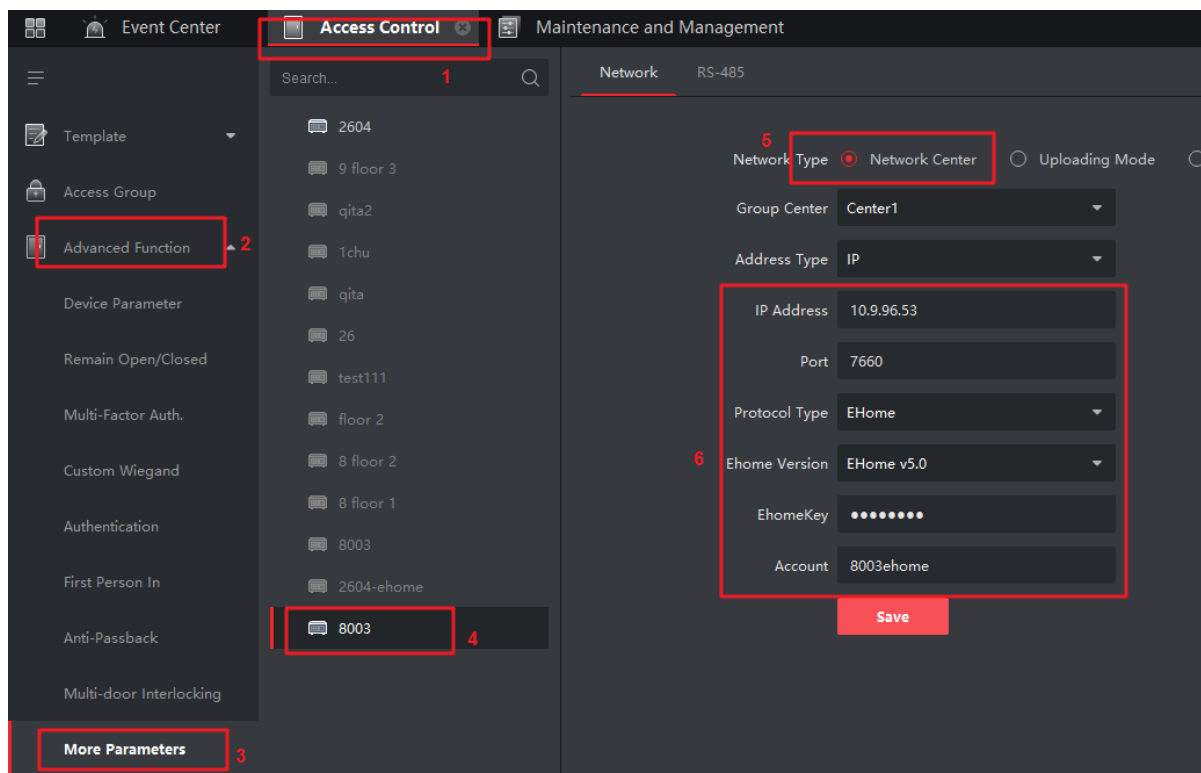


3. Modify uploading mode

Select Uploading Mode, and select Enable, Main Channel select N1, and click Save, it will prompt succeed.

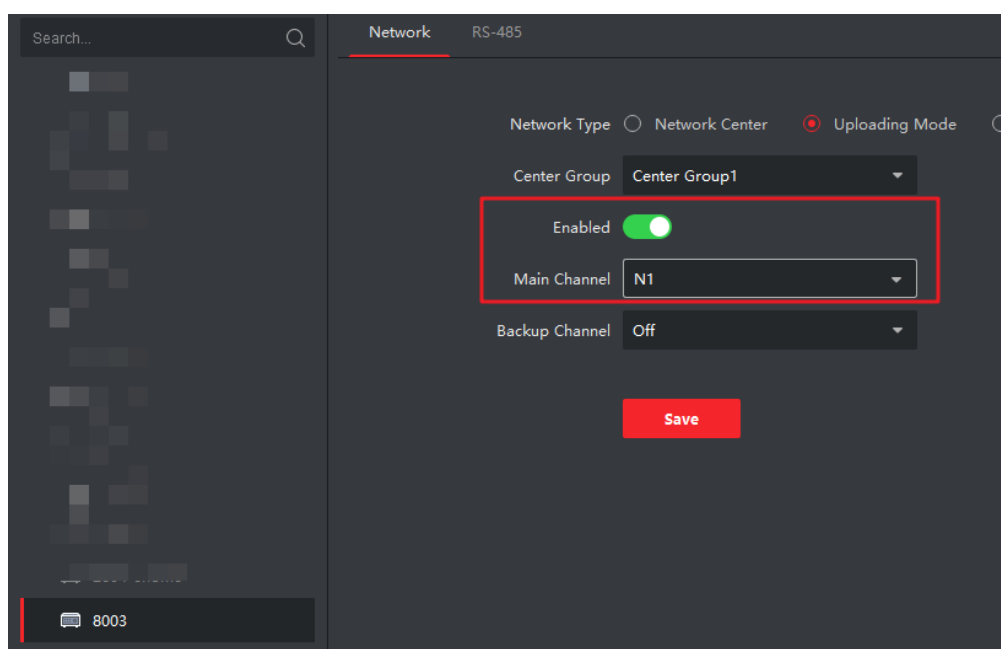


DS-K1T Series EHome Configuration in New iVMS-4200

4. Add device again through EHOME protocol
 - a) Delete the device from list which is added just now.
 - b) Click add and input nickname, account and ehome key(only EHome V5.0 support), click Add and it will prompt succeed.

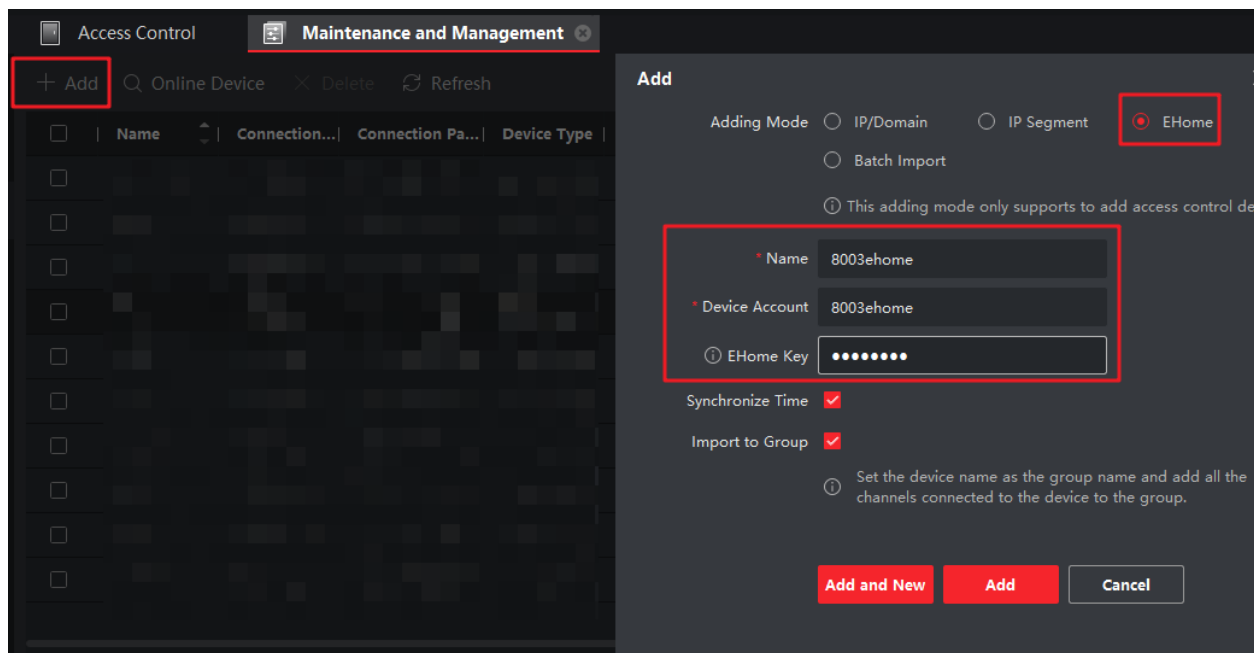

- c) If add successfully, wait about 1 minute, we can find device serial number and device online status from list. Other operations are the same.

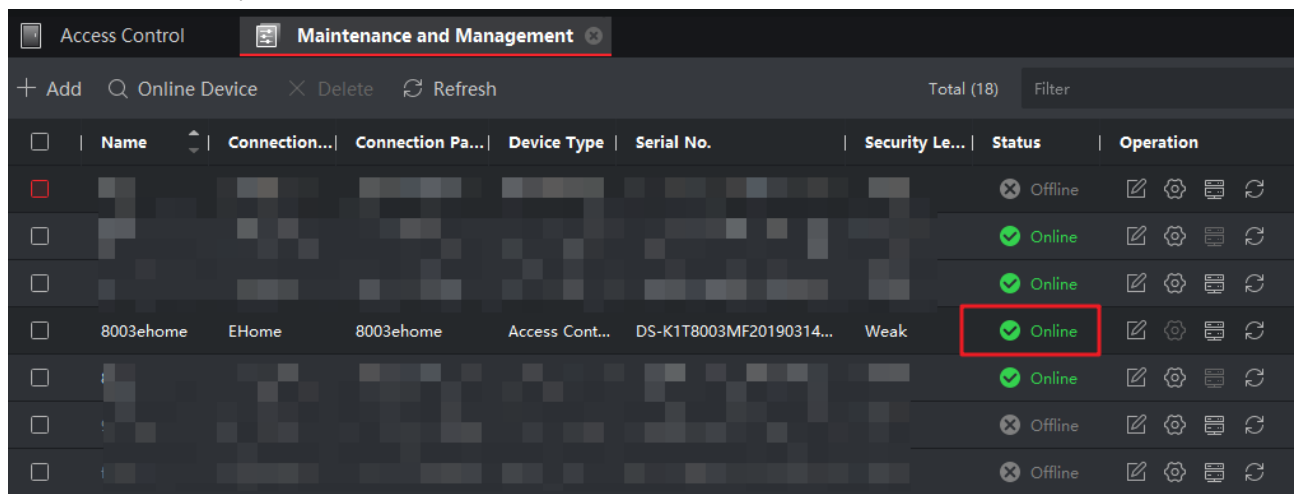

Suitable Models:

Model	Description
DS-K1T105	Standalone Access Control Terminal
DS-K1T201	Standalone Access Control Terminal
DS-K1T8003	Standalone Access Control Terminal
DS-K1A8503	Standalone Time Attendance Terminal
DS-K1T604/605/606	Face Recognition Access Control Terminal