

NP-SC6550 X-Ray Security Inspection System

NP-SC6550 X-Ray security inspection system is an advanced security detection system designed for briefcases, postal bags, express mails, hand held parcels, and small packages checking with a world leading x-ray screening and single-energy image processing technology.

With the popular tunnel size of 659mm (W) x 504 (H), compact and movable design, NP-SC6550 is an ideal economical security inspection solution for hotels, government agencies, transportation hubs, logistics industry, courts, prosecutors, prisons, embassies, factories, schools, hospitals, stadiums, exhibition halls, entertainment venues, etc.



Key Features

- High performance with HD image, strong penetration, precise recognition
- Adopts embedded Linux operating system with multi-core ARM
- Energy saving and environment protection with low power consumption
- Supports real-time monitoring
- Supports multiple image processing mode
- Supports POST (power on self-test)
- 64X zoom in
- One-touch power off
- Energy-saving working mode for conveyor available
- Shock-proof design
- User friendly interface for easy operation

System Functions

X-ray Image processing functions:

Color/Black & White, local enhancement, high penetration, low penetration, super enhancement, inverse color, light increase, light reduce, grey scale scan, image zoom in, edge enhancement.

System functions:


Power on self-diagnosis, multi levels user management, image management, TIP management, curve diagnosis, equipment information query, Multi-format image export, image mirroring, 1-16 times stepless zoom in, operator training, precise positioning of baggage images, clear channel reminder, one key calibration, one-key shutdown




Specifications

Model	NP-SC6550
Tunnel size	659.4mm Wx504 mm H
Conveyor height	0.22 m/s
Conveyor speed	700mm
Max. load	150 kg (330.69 lb)
Penetration (steel)	Standard 8 mm, 11mm by customize
Wire resolution	40AWG
Spatial resolution	Vertical: 1.0 mm Horizontal: 1.0 mm
X-ray dose per inspection	< 3.5 μ Sv
X-ray leakage	< 1 μ Sv/h
X-ray generator	Anode Voltage: 80 kV, 100% Oil Cooling, Single generator, vertical beam direction.
Images colors	B/W, Colors
Images storage	10000 images
Film safety	ISO1600
Working temperature	5 °C to 40 ° C (41 °F to 104 °F)
Working humidity	0% to 90%
Operation system	Linux
Power supply	AC 220 V (+ 10% to -15%), 50 Hz (\pm 3 Hz)
Power consumption	0.8 kw
Dimension (L x W x H) without table	2195mm x 902 mm x 1362.5 mm (86.42" x 35.51" x 53.64")
Weight	420 kg (925.94lb)
Extended table	614mm
Accessories	
Extended table	614mm x1 in exit (Included)
LCD monitor	17" LCD Color Monitor x1 included
Dedicated Key board & mouse	Standard included

Dimension

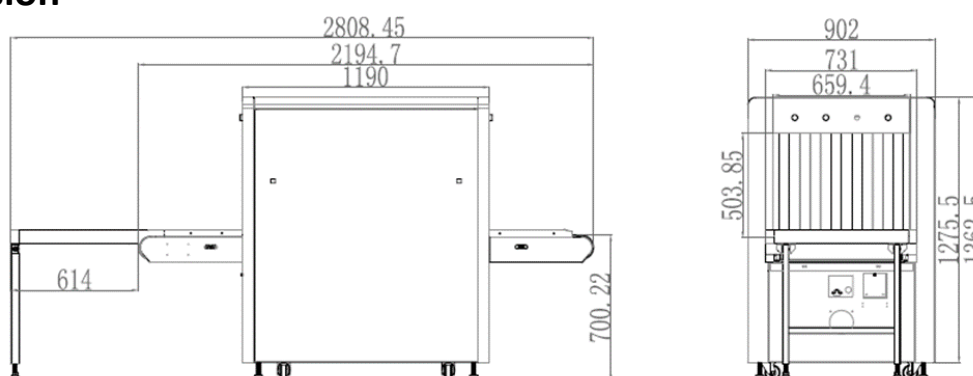

Scanned Images

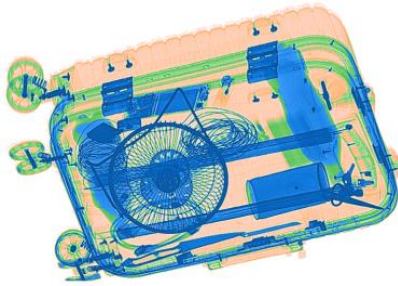

Available Model

NP-SC6550

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com