

How to add NVR to keyboard by DS-1100KI

Preparation

The firmware version of DS-1100KI is 3.0

Steps:

1. Click **Device** button on the screen to enter the Device list.



Figure 1.1 Admin Main Interface

2. The figure 1.2 is show the successfully added device. You can add device in the three sheets including Encoder list for adding encoding devices such as IP camera, DVR, NVR, etc. , Controller list for adding controlling devices such as video wall controller, etc. and Decoder list for. The figure 1.3 is add device that we should fill in the Device name, port, Ip/domain, etc.

Device Type	Device Name	IP/Domain	Port	Status	Edit
IP Dome		10.10.38.169	8000	Offline	
IP Dome	12	10.10.0.55	8000	Online	
NVR	4	10.6.11.15	8000	Online	
M_ENC		10.48.12.3	26500	Offline	
M_ENC		10.48.12.3	27200	Offline	
M_ENC		10.48.12.3	27900	Offline	
M_ENC		10.48.12.3	28600	Offline	
M_ENC		10.48.12.3	29100	Offline	

Total 27 items Page 1/4 To 1 P

Logout Delete Return

Figure 1.2 Device List

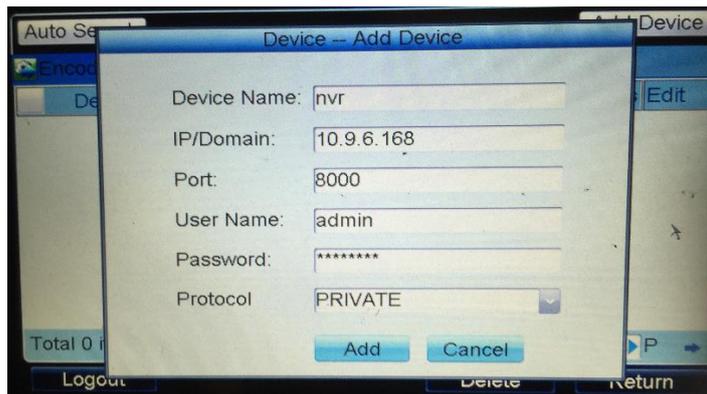


Figure 1.3 Add Device

3. Tap **User** on the main interface to enter the User-User List interface.

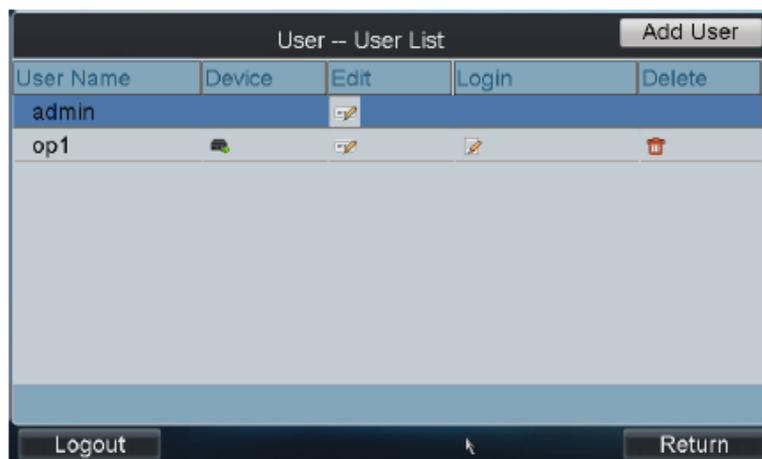


Figure 1.4 User List

4. On the **User List** interface, tap **Add User** to enter the **Add User** interface. Input the user name, password and confirm the password. Tap **Add** to finish the adding of user



Figure 1.5 Add user

5. Return to the **User List** interface, and tap  of the selected user to enter the **User-Device** interface.



Figure 1.6 Device

6. Tap **Add Device** to enter the **User-Add Device** interface. Select the device by checking the checkbox, and tap **Add** to add the device for the current user.
7. The added device (s) for the current user can be displayed on the **User-Device** interface.

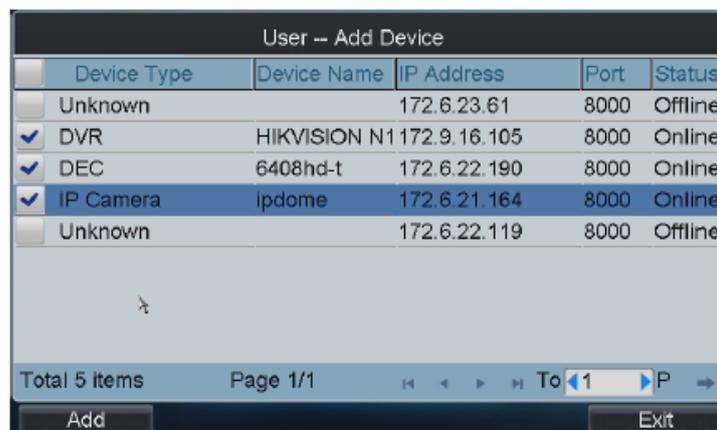


Figure 1.7 Add Device

8. On the User-User List interface of the admin, tap  (Login Operator) to directly switch to the Operator User Login interface.



Figure 1.8 Add Device

9. Tap **Device List** on the main interface to enter the **Device List** interface. The list displays all devices which can be controlled by the current login user.

Device List

Encoder Controller Decoder

Device Type	Device Name	IP Address	Port	Status	Config
IP Dome		10.10.38.169	8000	Offline	
IP Dome	12	10.10.0.55	8000	Online	
NVR	4	10.6.11.15	8000	Online	

Total 3 items Page 1/1 << < > >> To P >>>

First Choice for Security Professionals

HIKVISION Technical Support