


|                 |  |                 |      |              |          |
|-----------------|--|-----------------|------|--------------|----------|
| <b>Title:</b>   | How to Upgrade Software Version of 1600KI Keyboard to V2.0.0 | <b>Version:</b> | V1.0 | <b>Date:</b> | 3/8/2017 |
| <b>Product:</b> | DS-1600K   |                 |      | <b>Page:</b> | 1 of 6   |

## How to Upgrade Software Version of 1600KI Keyboard to V2.0.0


### 1. Step 1

- 1) Put hikservice folder under the **root directory** of D Disk, double click  UPDATE update.bat, input IP of keyboard (the keyboard and PC should be at the same network segment, e.g., **192.168.0.5 & 192.168.0.12**), hit Enter.

If prompt as below:


```
<1>Connect Keyboard  
unable to connect to 10.5.3.102:5555
```

- 2) You'll have to open the Developer mode on the keyboard, General -> About -> Click "DS-1600K" character for 6-7 times

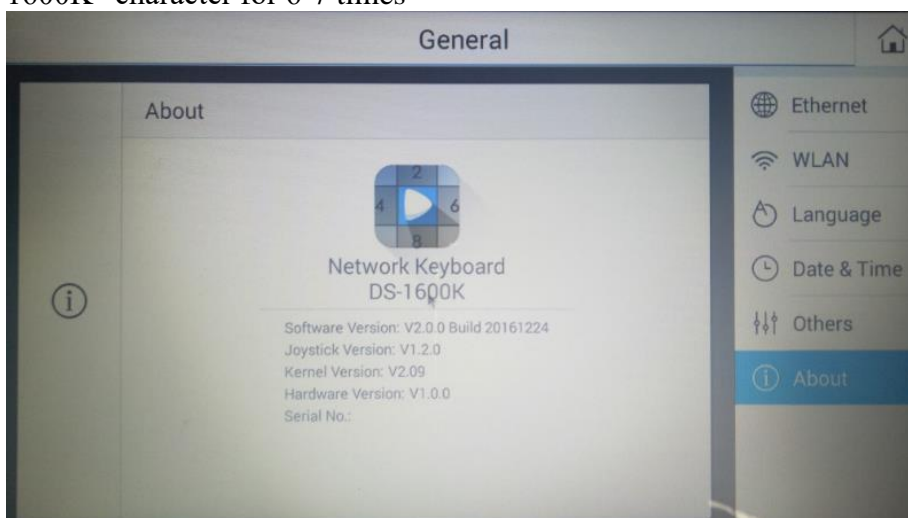

- 3) Click Others -> Developer options to open the developer mode, turn to Step 2

|                 |  |                 |      |              |          |
|-----------------|--|-----------------|------|--------------|----------|
| <b>Title:</b>   | How to Upgrade Software Version of 1600KI Keyboard to V2.0.0 | <b>Version:</b> | V1.0 | <b>Date:</b> | 3/8/2017 |
| <b>Product:</b> | DS-1600K   |                 |      | <b>Page:</b> | 2 of 6   |

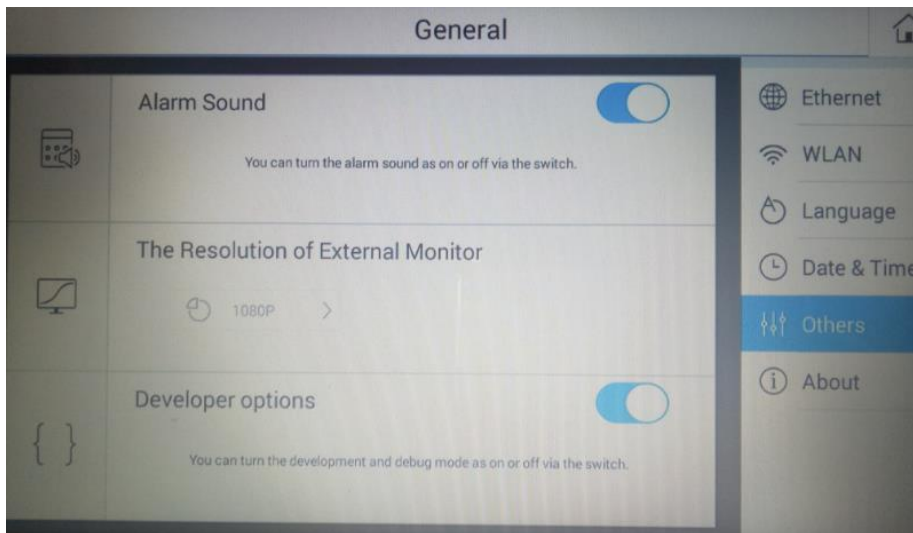

**Note:** V2.0.0 do not support hikservice of V1.0.0, thus keyboards with initial version of V1.0.0, must install new hikservice before upgrading to V2.0.0 (including V1.0.0 -> V2.0.0 or V1.0.0 -> V1.1.0 -> V2.0.0)

## 2. Step 2

1) If prompt as below:

```
Input Keyboard IP : 10.5.3.102

<1>Connect Keyboard
connected to 10.5.3.102:5555


<2>Install hikservice
remount succeeded
214 KB/s <13600 bytes in 0.062s>
```

2) It means hikservice has been installed successfully

## 3. Step 3

Use USB Disk to upgrade the software to V2.0.0, click Browse to select the upgrade patch to update the system

|                 |  |                 |      |              |          |
|-----------------|--|-----------------|------|--------------|----------|
| <b>Title:</b>   | How to Upgrade Software Version of 1600KI Keyboard to V2.0.0 | <b>Version:</b> | V1.0 | <b>Date:</b> | 3/8/2017 |
| <b>Product:</b> | DS-1600K   |                 |      | <b>Page:</b> | 3 of 6   |

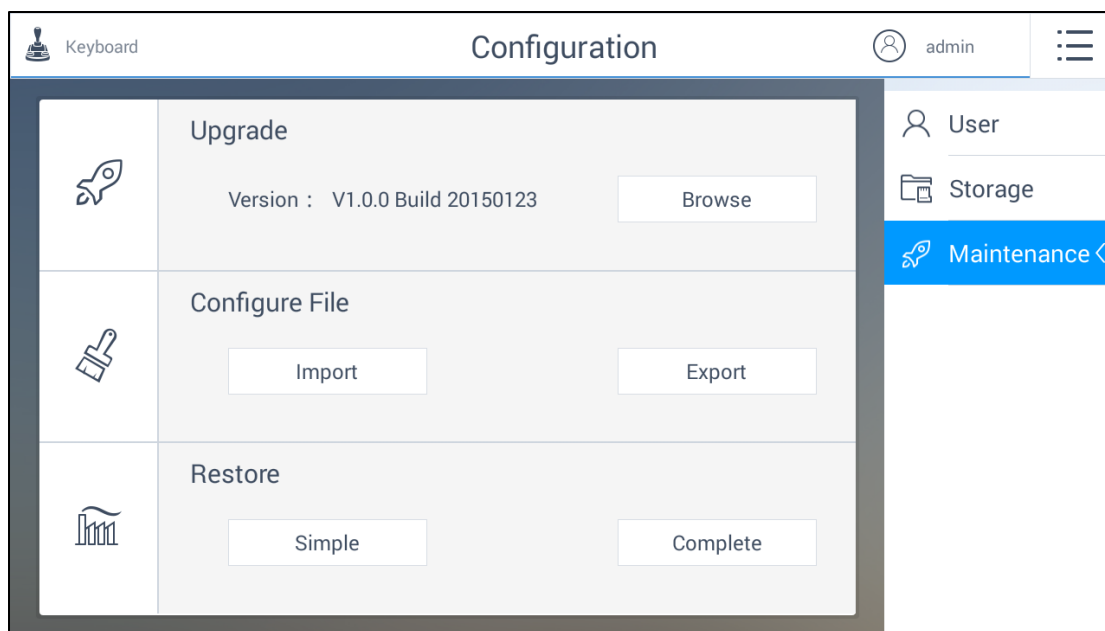

|                 |   |                 |      |              |          |
|-----------------|---|-----------------|------|--------------|----------|
| <b>Title:</b>   | How to Upgrade Software Version of 1600KI<br>Keyboard to V2.0.0 | <b>Version:</b> | V1.0 | <b>Date:</b> | 3/8/2017 |
| <b>Product:</b> | DS-1600K  |                 |      | <b>Page:</b> | 4 of 6   |

## First Choice for Security Professionals **HIKVISION** Technical Support