



Comment configurer la fonction de fréquence des personnes

Introduction

La fonction de fréquence des personnes est principalement utilisée pour la détection, l'enregistrement des fréquences, le téléchargement et la récupération des alarmes des personnes à haute fréquence et des personnes à basse fréquence. La fonction de fréquence des personnes ne peut être configurée que sur la page Web..

Configuration

1. Configuration du Web

Configuration > Event > People frequency > Frequently Appeared Person / Rarely Appeared Person.

The screenshot displays the Hikvision web interface. The top navigation bar includes 'Live View', 'Playback', 'Picture', 'Application', and 'Configuration' (highlighted in red). The left sidebar contains a tree view with categories: Local, System, Network, Video/Audio, Image, Event, People Frequency, Storage, Vehicle Detection, VCA, Human Body Capture, and Face Picture Library. The 'Event' category is expanded, and 'People Frequency' is selected. The main content area shows the 'Frequently Appeared Person' configuration page. It includes a 'Linked Channel' tab, a 'Select All' checkbox, and a list of channels with checkboxes. The 'Frequently Appeared Person' tab is active, and the 'Rarely Appeared Person' tab is also visible. The configuration settings for 'Frequently Appeared Person' are as follows:


Setting	Value
Enable	<input type="checkbox"/>
Capture Interval	10 minute(s)
Frequency Threshold (≥)	5
Statistics Cycle	7 Day(s)

The 'Linked Channel' tab is selected, showing a list of channels with checkboxes. The 'Select All' checkbox is checked. The list of channels includes '7A46_TestCL2'.


2. Activer la fonction et définir les paramètres de détection

Activez cette fonction et réglez les paramètres de détection :

- 1) Régler l'intervalle de capture (1-1440mins)
- 2) Définir le seuil de fréquence (1-100)
- 3) Définir le cycle de statistiques (1-31 jours)

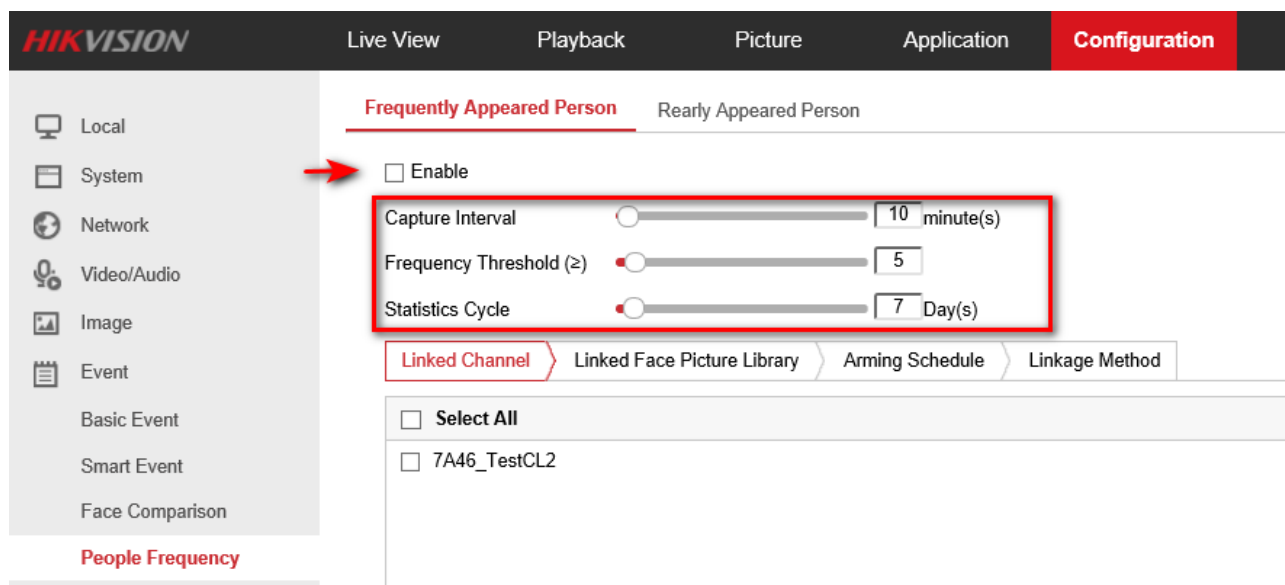

Il existe un paramètre d'heure de rapport quotidien pour la personne rarement apparue :

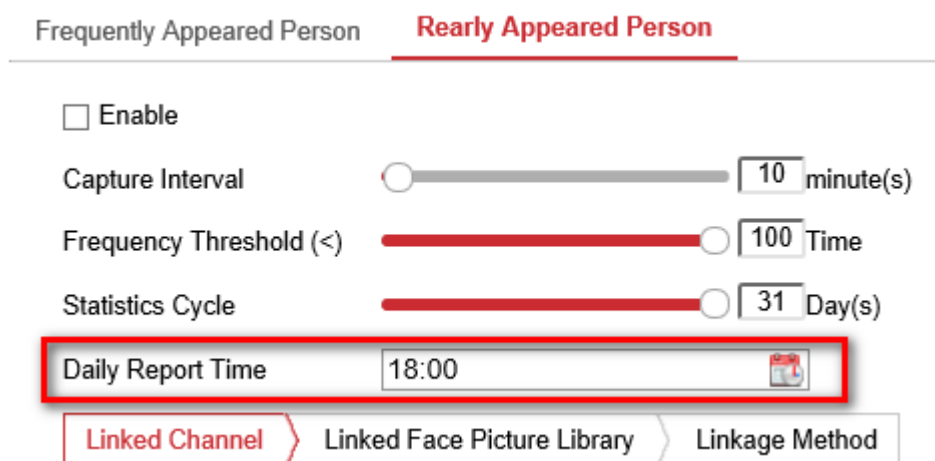

3. Canal lié

Frequently Appeared Person Rearly Appeared Person

☐ Enable

Capture Interval 10 minute(s)

Frequency Threshold (≥) 5

Statistics Cycle 7 Day(s)

Linked Channel Linked Face Picture Library Arming Schedule Linkage Method

☒ Select All

☒ 7A46_TestCL2

☒ ETER33_Fisheye

4. Bibliothèque des visages liés

La bibliothèque d'étrangers par défaut est intégrée à la fonction Personne apparaissant fréquemment. Le modèle de visage des inconnus capturés sera stocké dans la bibliothèque à des fins de comparaison, de sorte que les inconnus apparaissant fréquemment déclencheront l'alarme de personne apparaissant fréquemment.

Pour l'autre bibliothèque de photos de visages, vous pouvez choisir le filtre ou l'alarme. Si la bibliothèque est définie comme un filtre, les personnes de la bibliothèque de visages ne déclencheront pas l'alarme "Personne apparaissant fréquemment".

Frequently Appeared Person Rarely Appeared Person

☐ Enable

Capture Interval 10 minute(s)

Frequency Threshold (≥) 5

Statistics Cycle 7 Day(s)

Linked Channel **Linked Face Picture Library** Arming Schedule Linkage Method

☒ Select All

☒ Strangers 75

☒ test 75

Filter
Alarm

5. Définir le calendrier d'armement et la méthode d'enchaînement

Linked Channel Linked Face Picture Library **Arming Schedule** Linkage Method

✕ Delete Delete All

	0	2	4	6	8	10	12	14	16	18	20	22	24
Mon													
Tue													
Wed													
Thu													
Fri													
Sat													
Sun													

Linked Channel	Linked Face Picture Library	Arming Schedule	Linkage Method
<input type="checkbox"/> Normal Linkage	<input type="checkbox"/> Trigger Alarm Output	<input type="checkbox"/> Trigger Recording	
<input type="checkbox"/> Audible Warning	<input checked="" type="checkbox"/> A->1	<input checked="" type="checkbox"/> D1	
<input type="checkbox"/> Send Email	<input type="checkbox"/> A->2	<input type="checkbox"/> D2	
<input checked="" type="checkbox"/> Notify Surveillance Center	<input type="checkbox"/> A->3	<input type="checkbox"/> D3	
<input type="checkbox"/> Full Screen Monitoring	<input type="checkbox"/> A->4	<input type="checkbox"/> D4	
	<input type="checkbox"/> A->5		
	<input type="checkbox"/> A->6		
	<input type="checkbox"/> A->7		
	<input type="checkbox"/> A->8		
	<input type="checkbox"/> D1->1		
	<input type="checkbox"/> D1->2		
	<input type="checkbox"/> D2->1		

6. Sauvegarder les règles


The screenshot shows the Hikvision web interface with the 'Configuration' tab selected. The left sidebar contains a menu with categories: Local, System, Network, Video/Audio, Image, Event, Basic Event, Smart Event, and Face Comparison. Under 'Face Comparison', the 'People Frequency' section is expanded, showing options for Storage, Vehicle Detection, VCA, Human Body Capture, and Face Picture Library. The main content area is titled 'Frequently Appeared Person' and has a sub-tab 'Frequently Appeared Person' (the other sub-tab is 'Rarely Appeared Person'). The configuration includes:

- ☒ Enable
- Capture Interval: 10 minute(s)
- Frequency Threshold (≥): 5
- Statistics Cycle: 31 Day(s)

Below these are four sub-tabs: 'Linked Channel' (selected), 'Linked Face Picture Library', 'Arming Schedule', and 'Linkage Method'. Under 'Linked Channel', there is a 'Select All' checkbox (checked) and a list of channels:

- ☒ 7A46_TestCL2
- ☒ ETER33_Fisheye

At the bottom of the configuration area, there is a red 'Save' button with a floppy disk icon, which is highlighted by a red rectangle.

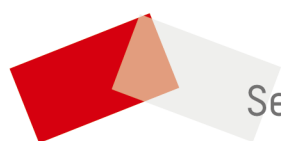

See Far, Go Further