



LCD Display with Front Maintenance Bracket

Installation Guide

Installation Guide

COPYRIGHT ©2019 Hangzhou Hikvision Digital Technology Co., Ltd.

ALL RIGHTS RESERVED.

Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou Hikvision Digital Technology Co., Ltd. or its subsidiaries (hereinafter referred to be “Hikvision”). This user manual (hereinafter referred to be “the Manual”) cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of Hikvision. Unless otherwise stipulated, Hikvision does not make any warranties, guarantees or representations, express or implied, regarding to the Manual.

About this Manual

This Manual is applicable to LCD displays.

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the company website. (<http://overseas.hikvision.com/en/>).

Please use this user manual under the guidance of professionals.

Trademarks Acknowledgement

HIKVISION and other Hikvision’s trademarks and logos are the properties of Hikvision in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

Legal Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED “AS IS”, WITH ALL FAULTS AND ERRORS, AND OUR COMPANY MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL OUR COMPANY, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF OUR COMPANY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. OUR COMPANY SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, OUR COMPANY WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.

SURVEILLANCE LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS THE APPLICABLE LAW. OUR COMPANY SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THIS MANUAL AND THE APPLICABLE LAW, THE LATER PREVAILS.

Regulatory Information

FCC Information

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC compliance: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

EU Conformity Statement

 This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the EMC Directive 2014/30/EU, the LVD Directive 2014/35/EU, the RoHS Directive 2011/65/EU.

 2012/19/EU (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info

 2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: www.recyclethis.info

Industry Canada ICES-003 Compliance

This device meets the CAN ICES-3 (A)/NMB-3(A) standards requirements.

Applicable Models

This manual is applicable to the LCD displays.

Symbol Conventions

The symbols that may be found in this document are defined as follows.

Symbol	Description
 NOTE	Provides additional information to emphasize or supplement important points of the main text.
 WARNING	Indicates a potentially hazardous situation, which if not avoided, could result in equipment damage, data loss, performance degradation, or unexpected results.
 DANGER	Indicates a hazard with a high level of risk, which if not avoided, will result in death or serious injury.

Safety Instructions

- In the use of the product, you must be in strict compliance with the electrical safety regulations of the nation and region. Please refer to technical specifications for detailed information.
- Do not connect several devices to one power adapter as adapter overload may cause over-heating or a fire hazard.
- Please make sure that the plug is firmly connected to the power socket.
- If smoke, odor or noise rise from the device, turn off the power at once and unplug the power cable, and then please contact the service center.
- If the product does not work properly, please contact your supplier or the nearest service center. Never attempt to disassemble the device yourself. (We shall not assume any responsibility for problems caused by unauthorized repair or maintenance.)
- Make sure the power supply voltage is correct before using the device.
- Do not drop the device or subject it to physical shock.
- Make sure the AC outlet is unplugged or switched to OFF before the repair or maintenance in case of the human injury.
- Do not aim the device at the sun or extra bright places. Blooming or smearing may occur otherwise (which is not a malfunction), and affect the endurance of screen at the same time.
- When the product is mounted on wall or ceiling, the device shall be firmly fixed.

- Do not bend, pull or drag the power cord, and do not change the position of the power cord randomly. Make sure the power cord is away from the heat resource in case of the fire or electric shock. Please contact the dealer if there is anything wrong with the power cord.
- The screen may be burned out by a laser beam, so when any laser equipment is in using, make sure that the surface of screen will not be exposed to the laser beam.
- To avoid heat accumulation, good ventilation is required for operating environment.
- Keep the device away from liquid while in use.
- While in delivery, the device shall be packed in its original packing, or packing of the same texture.
- Improper use or replacement of the battery may result in hazard of explosion. Replace with the same or equivalent type only. Dispose of used batteries according to the instructions provided by the battery manufacturer.
- Some mechanical or electrical components possesses of the special safety protection function. Those protection functions may be ignored by unwariness during the safety exam. However, the special safety function (high rated voltage or rated power, etc.) cannot be gained on the replaced components. All those original electrical components with the special safety function are listed on the international dangerous symbols. And the electrical components replaced the originals may cause electric shock, fire or other potential danger.
- Keep all liquids away from the device.
- Ensure environmental conditions meet factory specifications.
- Power down the unit before connecting and disconnecting accessories and peripherals.
- Improper use or replacement of the battery may result in hazard of explosion. Replace with the same or equivalent type only. Dispose of used batteries according to the instructions provided by the battery manufacturer.

Chapter 1 Preparation for Installation

1.1 Precautions

To ensure safety, please read this manual carefully before the installation. Store this installation guide for future reference.

- Ensure the wall is solid and strong enough to bear the weight of the LCD displays.
- Complete screen installation first and then do other decorating on site. If you have to do decorating in advance, leave at least 2 cm space from the screen area to the surrounding.
- Ensure the screen size is no greater than 3 × 4 or 4 × 3 for safety.
- Mark out the dimensions on the wall using a measuring tool such as a level.

1.2 Notes on Moving LCD Displays

When you want to move or place displays, take the following tips:



- Always move the displays by at least 2 adults.
- When taking out the displays, always keep the displays vertical.
- When moving the displays, one person should hold the screen handles and the other should hold the screen from the bottom. Always keep the display vertical.
- When laying down the display, stand the display vertically.
- Do not place the display face up or face down.
- Do not stack the displays.

1.3 Device Check

- Check the device after you receive the device.
- Check the appearance and take pictures if required for later handling.
- Check the device against the checking list. Check if the device model, accessory quantity, and bracket quantity are correct and check if the brackets are in proper conditions. If there is any damage or lack, keep the original package and contact your dealer.
- Take out the devices and perform appearance and power-on tests one by one.

1.4 Packing List

The following table lists the packing list for one LCD display package.

Item	Quantity	Item	Quantity
 <p>Hook</p>	2	 <p>Bracket</p>	1
 <p>Positioning Ruler</p>	1	 <p>M8×90 mm Expansion Bolts</p>	4
 <p>M6×30 mm Hex Socket Head Cap Screws</p>	4	 <p>M6×14 mm Phillips Screws</p>	4

Chapter 2 Installation

The following uses a 46-inch joint screen with 2×2 scale as an example to describe how to mount LCD displays with front-maintenance brackets.

2.1 Mount the Brackets



NOTE

Install the brackets from the bottom to the top, from the middle to the sides. That is, finish the lowest row first and then move to the upper row.

Step 1 Take out a bracket and secure it onto the wall with M8×90 mm expansion bolts.

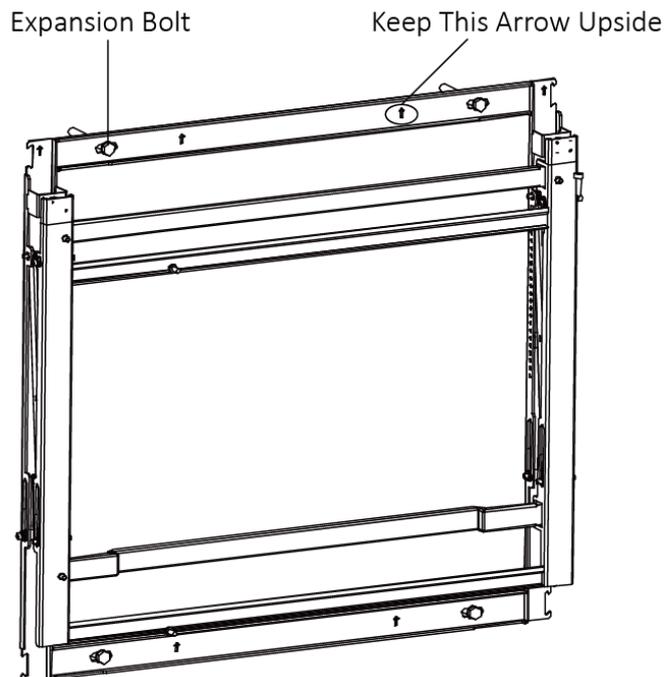


Figure 2-1 Secure the Bracket

Step 2 Use the positioning ruler to determine the mounting positions of brackets B, C, and D.

The following figure shows a positioning ruler on which the positioning hole is used for horizontal positioning (column distance).

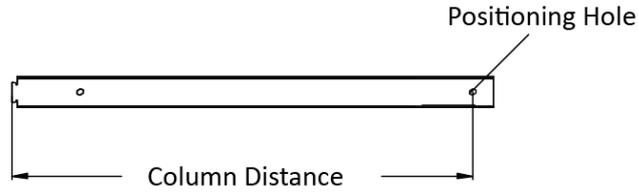


Figure 2-2 Positioning Ruler

- 1) Determine the mounting position for bracket B.

Place the positioning ruler horizontally and insert its left side into the lower-right opening of bracket A. Then determine the lower-left expansion bolt hole for bracket B by aligning with the positioning hole.

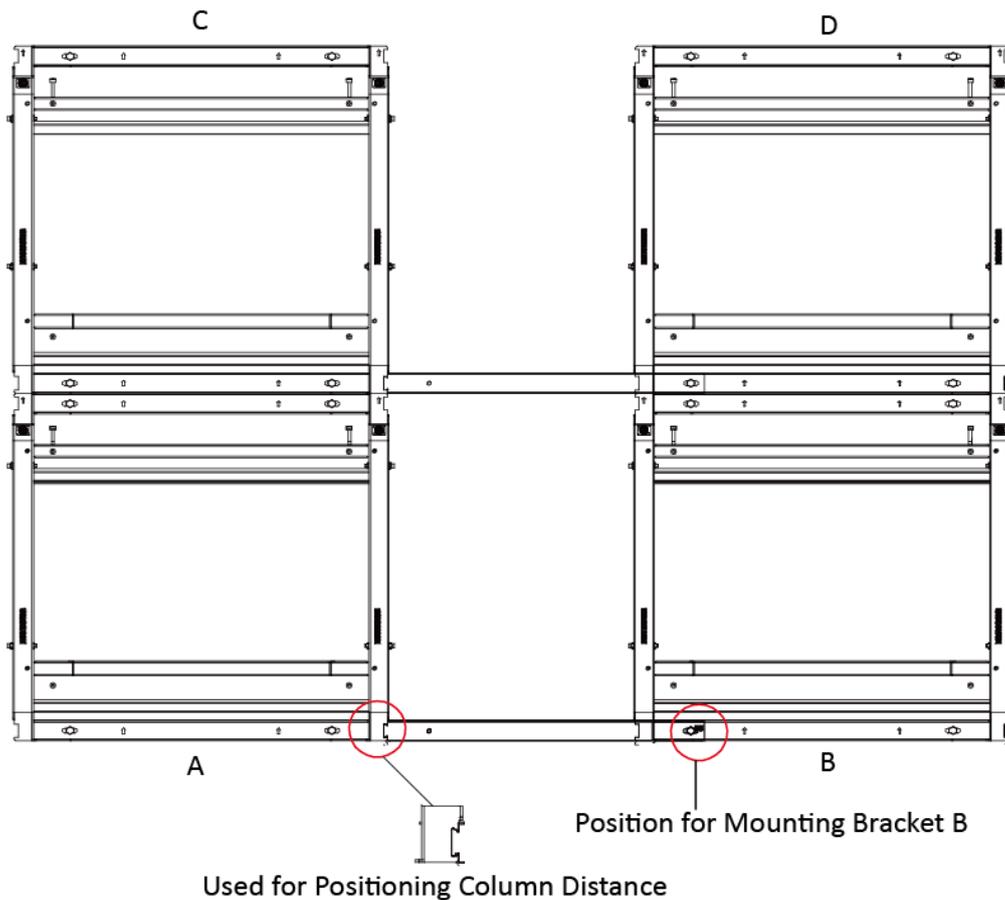


Figure 2-3 Determine Mounting Position for Bracket B

- 2) Place bracket C on the bracket B directly.
- 3) Use the positioning ruler to determine the mounting position for bracket D. See step 1).

Step 3 Secure brackets B, C, and D in the right positions on the wall with M8×90 mm expansion bolts.

2.2 Mount Displays

2.2.1 Mount Hooks

Step 1 Align the mounting holes of the hooks with those of the screen and secure the hooks to the screen with M6×14 mm Phillips screws.

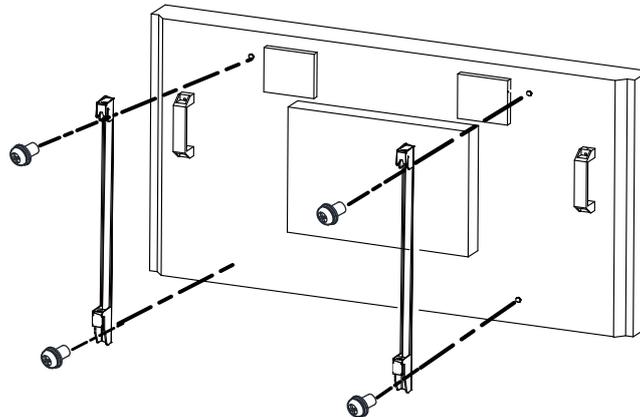


Figure 2-4 Secure Hooks

Step 2 Screw the M6×30 mm hex socket head cap screws into the top of the hooks for later position adjustment.

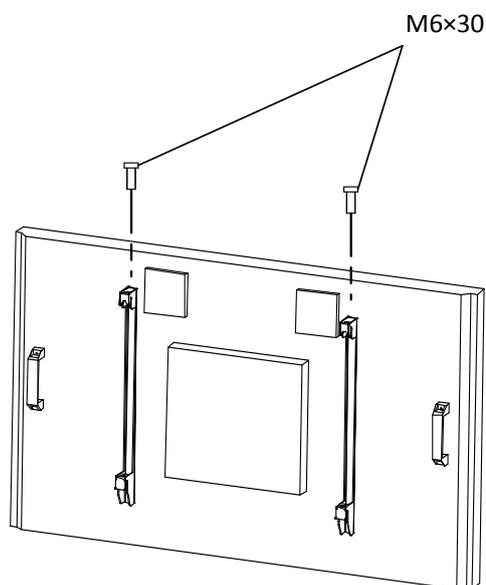


Figure 2-5 Mount Screws

Step 3 Repeat the preceding steps to mount hooks to the other three displays.

2.3 Mount Displays to Brackets

Step 1 Hold one display and attach the hooks to rails of the bracket.

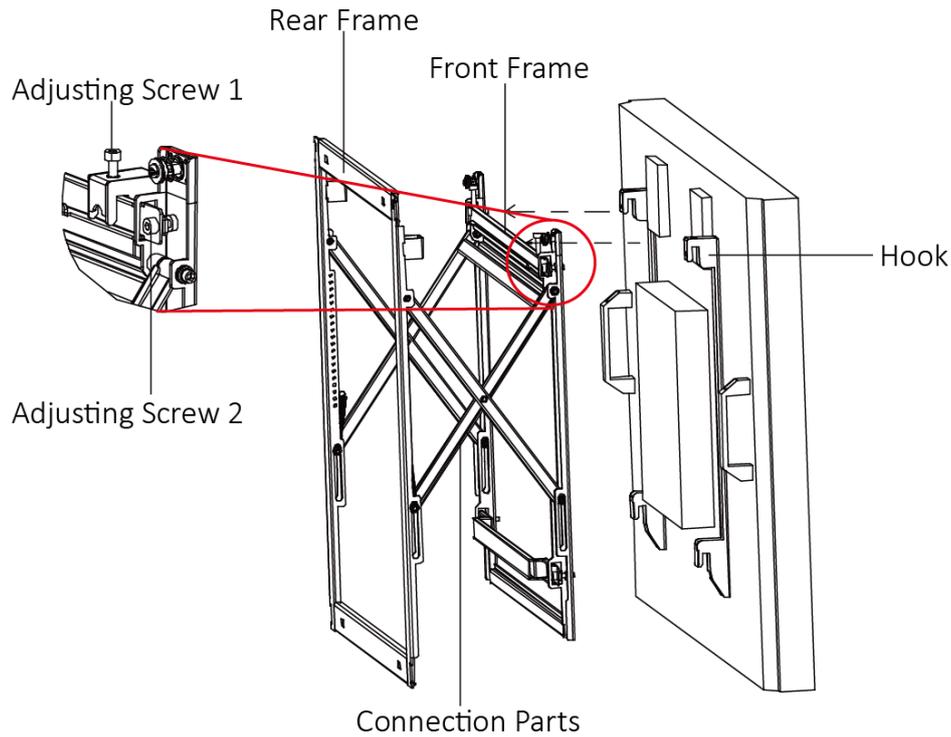


Figure 2-6 Mount Displays to Brackets

Step 2 Repeat step 1 to hang the other three displays onto the brackets.

2.4 Adjust Gaps and Flatness

After all the displays are mounted, make the following adjustments if required.

Step 1 Slide the displays horizontally to adjust the vertical gaps between the displays.

Step 2 Tighten or loosen adjusting screws 1 (as indicated in the Figure 2-6) to adjust the horizontal gaps between the displays.

Step 3 Tighten or loosen adjusting screws 2 (as indicated in the Figure 2-6) to adjust the flatness of the displays.

2.5 Verify the Installation

- Make sure an appropriate gap is kept between the displays. The perfect gap is about 1 mm, and make sure that an A4 paper can easily go through the gap.
- Power on the displays and check that the entire video wall screen is lit up normally.



See Far, Go Further