

<b>Title:</b>	How to configure Video Management	<b>Version:</b>	v1.0	<b>Date:</b>	10/10/2018
<b>Product:</b>	AX Series Wireless Security Control Panel			<b>Page:</b>	1 of 5

## Preparation

1. AX Series Wireless Security Control Panel, V1.0.0 or above
2. Internet Explorer or 4200 (2.7.3.8)

## How to configure Video Management


You can add two network cameras to the wireless security control panel, and link the camera with the selected zone for video monitoring. You can also receive and view the event video via client and Email.

### 1. Add Cameras to the Security Control Panel

- 1) Click System → Network Camera to enter the network camera management page.
- 2) Click Add, and enter the basic information of the camera, such as camera name, IP address, and port No.
- 3) Enter the user name and password of the camera.
- 4) Click Save.

#### Note

You can add two network cameras for a wireless security control panel.

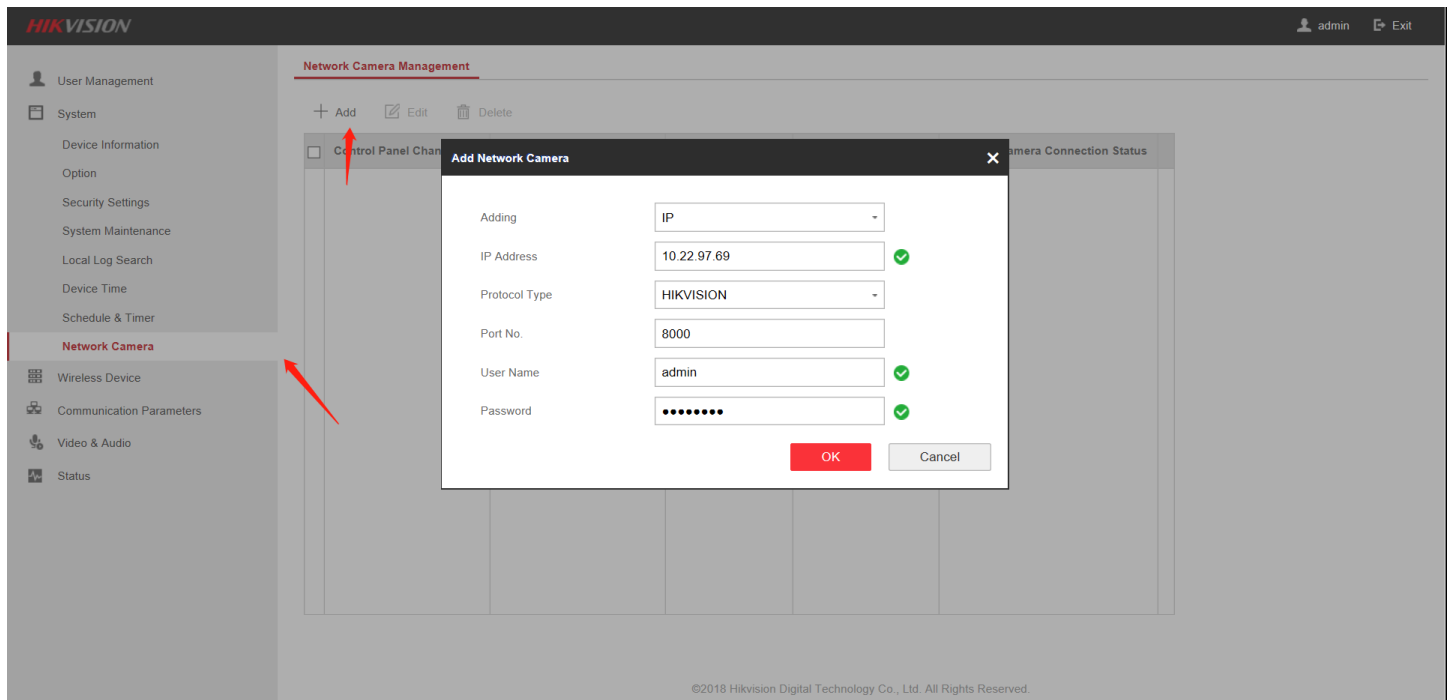

<b>Title:</b>	How to configure Video Management	<b>Version:</b>	v1.0	<b>Date:</b>	10/10/2018
<b>Product:</b>	AX Series Wireless Security Control Panel			<b>Page:</b>	2 of 5

## 5) Refresh, and check network Camera connection Status.

Control Panel Channel No.	Network Camera IP Address	Network Camera No.	Network Camera Port	Network Camera Connection Status
1	10.22.97.69	1	8000	Connected(Connected)

## 2. Link a Camera with the Zone

- 1) Click **Wireless Device** → **Zone** to enter the configuration page.
- 2) Select a zone needs video monitoring, and click the Setting.
- 3) Select the Linked Camera No.
- 4) Click OK.


Zone	Name
1	wirelessZ
2	wirelessZ
3	wirelessZ
4	wirelessZ
5	wirelessZ
6	wirelessZ
7	wirelessZ
8	wirelessZ
9	wirelessZ
10	wirelessZ
11	wirelessZ
12	wirelessZ
13	wirelessZ

<b>Title:</b>	How to configure Video Management	<b>Version:</b>	v1.0	<b>Date:</b>	10/10/2018
<b>Product:</b>	AX Series Wireless Security Control Panel			<b>Page:</b>	3 of 5


### 3. Results Show

#### APP: Hik-connect

1) When the **Zone** is triggered, notification will show like this, and click the notification

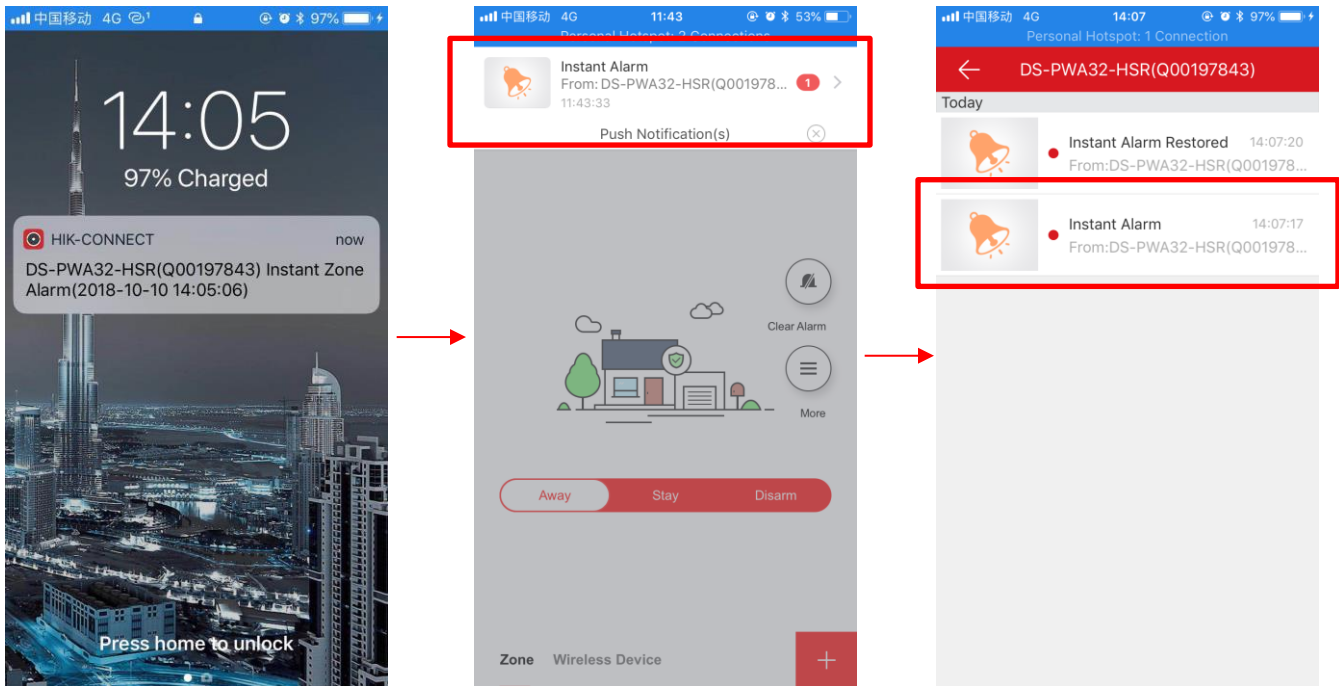


2) Enter the Playback.

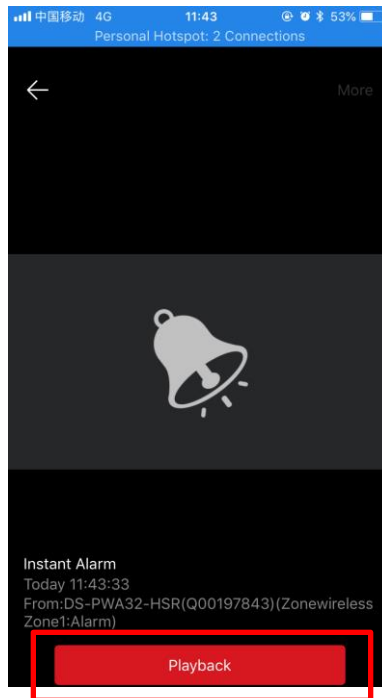


<b>Title:</b>	How to configure Video Management	<b>Version:</b>	v1.0	<b>Date:</b>	10/10/2018
<b>Product:</b>	AX Series Wireless Security Control Panel			<b>Page:</b>	4 of 5

3) You can see then video playback when Zone alarm.If you want storage the video,click

recording.

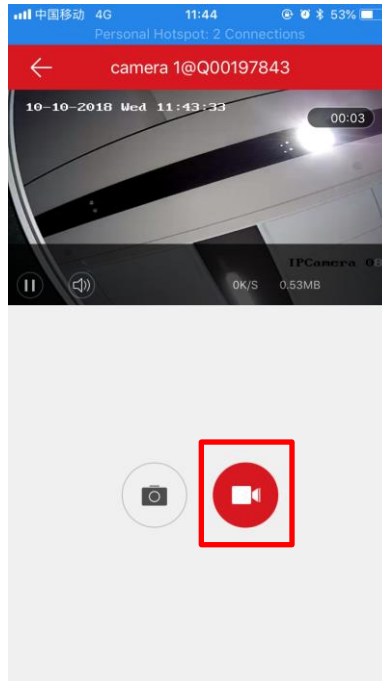

4) You can see the recorded video in **Pictures and Videos**.

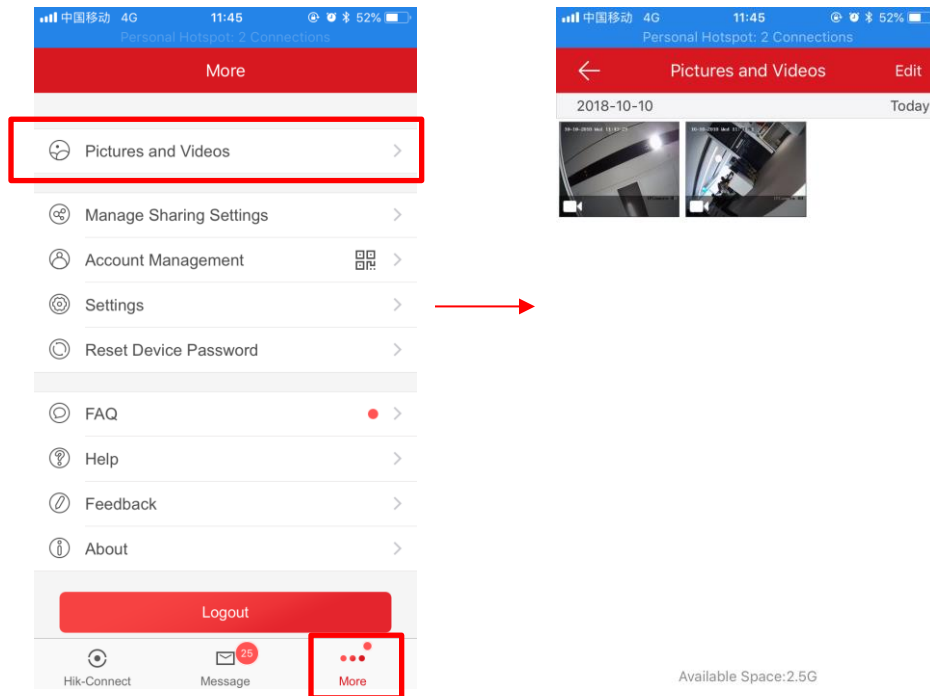


<b>Title:</b>	How to configure Video Management	<b>Version:</b>	v1.0	<b>Date:</b>	10/10/2018
<b>Product:</b>	AX Series Wireless Security Control Panel			<b>Page:</b>	5 of 5

## Email:

The alarm video playback will be sent to the email as an attachment.

If you need this feature, refer to document: **How to configure Event Video Transfer via Email Settings.**

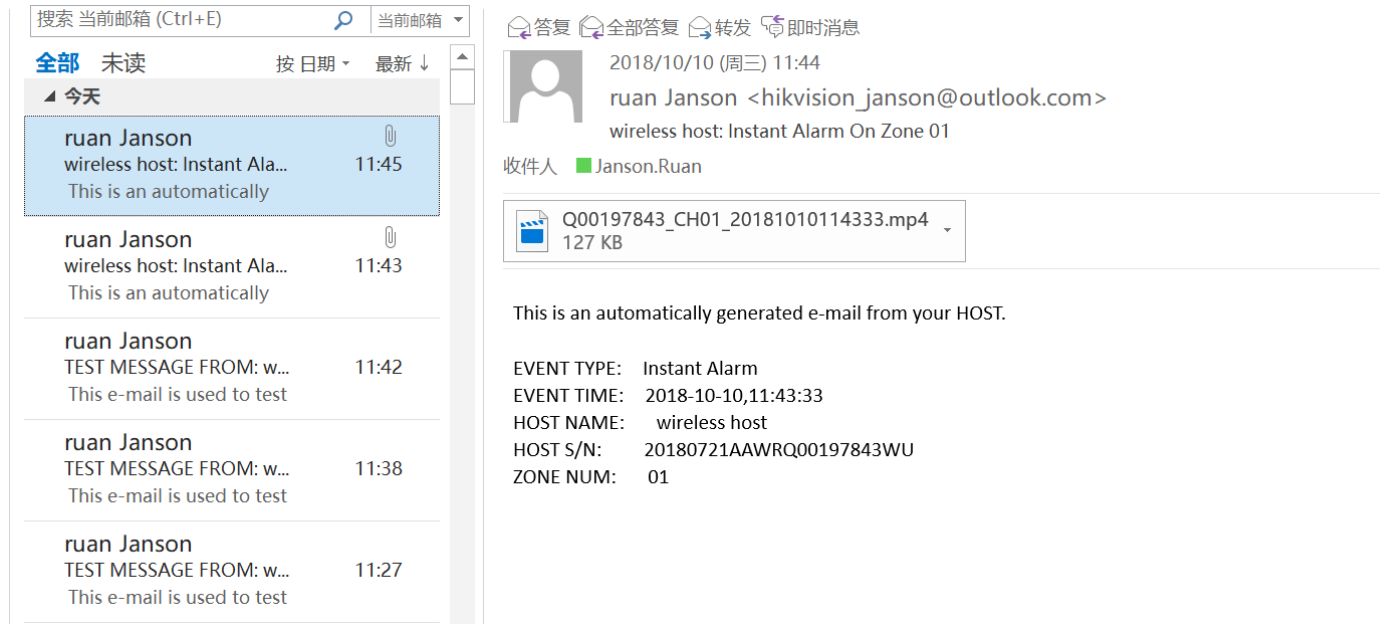

The screenshot shows an email client interface. On the left is a list of emails, with the most recent one selected. The email is from 'ruan Janson' with the subject 'wireless host: Instant Ala...' and a timestamp of 11:45. The body of the email says 'This is an automatically'. On the right, the email details are shown, including the sender's name 'ruan Janson' and email address '<hikvision\_janson@outlook.com>'. Below the sender information is a list of recipients, including 'Janson.Ruan'. An attachment is visible, named 'Q00197843\_CH01\_20181010114333.mp4' with a size of 127 KB. Below the attachment, the email body contains the text: 'This is an automatically generated e-mail from your HOST.' followed by event details: 'EVENT TYPE: Instant Alarm', 'EVENT TIME: 2018-10-10,11:43:33', 'HOST NAME: wireless host', 'HOST S/N: 20180721AAWRQ00197843WU', and 'ZONE NUM: 01'.

**First Choice for Security Professionals**  
**HIKVISION Technical Support**