


<b>Title:</b>	How to Upgrade Software Version of 1600KI Keyboard to V2.0.0	<b>Version:</b>	V1.0	<b>Date:</b>	3/8/2017
<b>Product:</b>	DS-1600K			<b>Page:</b>	1 of 6

## How to Upgrade Software Version of 1600KI Keyboard to V2.0.0


### 1. Step 1

- 1) Put hikservice folder under the **root directory** of D Disk, double click  UPDATE update.bat, input IP of keyboard (the keyboard and PC should be at the same network segment, e.g., **192.168.0.5 & 192.168.0.12**), hit Enter.

If prompt as below:


```
<1>Connect Keyboard  
unable to connect to 10.5.3.102:5555
```

- 2) You'll have to open the Developer mode on the keyboard, General -> About -> Click "DS-1600K" character for 6-7 times

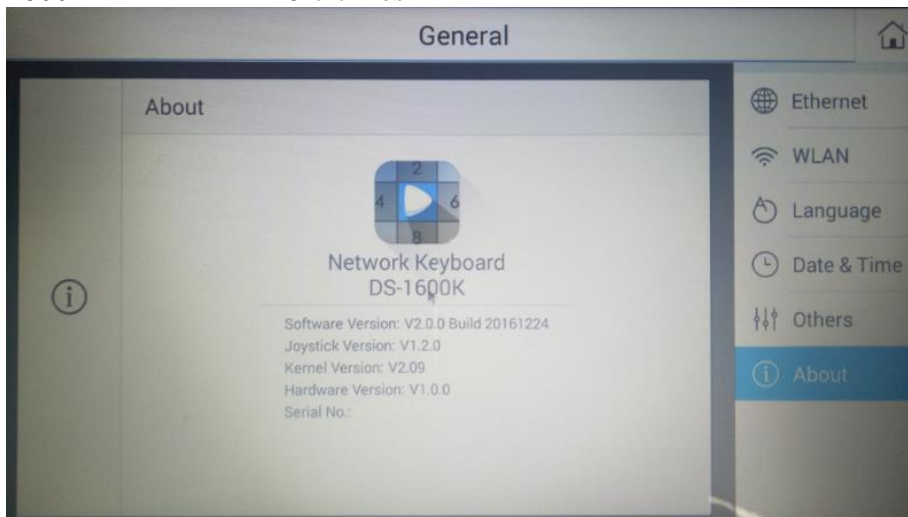

- 3) Click Others -> Developer options to open the developer mode, turn to Step 2

<b>Title:</b>	How to Upgrade Software Version of 1600KI Keyboard to V2.0.0	<b>Version:</b>	V1.0	<b>Date:</b>	3/8/2017
<b>Product:</b>	DS-1600K			<b>Page:</b>	2 of 6

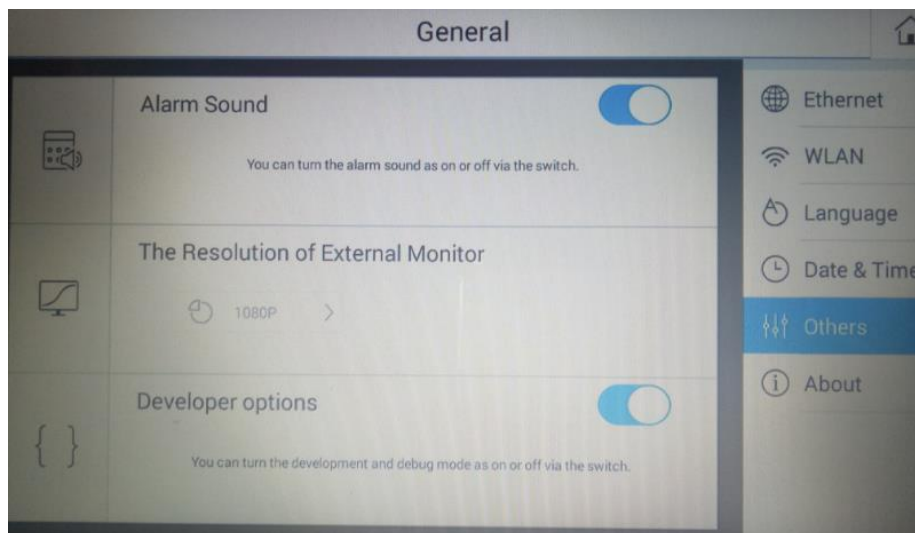

**Note:** V2.0.0 do not support hikservice of V1.0.0, thus keyboards with initial version of V1.0.0, must install new hikservice before upgrading to V2.0.0 (including V1.0.0 -> V2.0.0 or V1.0.0 -> V1.1.0 -> V2.0.0)

## 2. Step 2

1) If prompt as below:

```
Input Keyboard IP : 10.5.3.102

<1>Connect Keyboard
connected to 10.5.3.102:5555

<2>Install hikservice
remount succeeded
214 KB/s <13600 bytes in 0.062s>
```

2) It means hikservice has been installed successfully

## 3. Step 3

Use USB Disk to upgrade the software to V2.0.0, click Browse to select the upgrade patch to update the system

<b>Title:</b>	How to Upgrade Software Version of 1600KI Keyboard to V2.0.0	<b>Version:</b>	V1.0	<b>Date:</b>	3/8/2017
<b>Product:</b>	DS-1600K			<b>Page:</b>	3 of 6

The screenshot displays the Hikvision Configuration web interface for a Keyboard device. The main content area is divided into three sections:

- Upgrade:** Shows the current version as "Version : V1.0.0 Build 20150123" and includes a "Browse" button.
- Configure File:** Includes "Import" and "Export" buttons.
- Restore:** Includes "Simple" and "Complete" buttons.

The right-hand sidebar contains navigation options: "User", "Storage", and "Maintenance" (highlighted in blue). The top of the interface shows "Keyboard Configuration" and a user profile for "admin".



<b>Title:</b>	How to Upgrade Software Version of 1600KI Keyboard to V2.0.0	<b>Version:</b>	V1.0	<b>Date:</b>	3/8/2017
<b>Product:</b>	DS-1600K			<b>Page:</b>	4 of 6

**First Choice for Security Professionals**  
***HIKVISION* Technical Support**