

DS-KH6320-LE1(B)/White Video Intercom Network Indoor Station



The KH6 series IP indoor station, with 7-inch touch screen, brings you a more fluent and fit operation. You can also view the live view image of the public area, which helps to check the safety of the area and ensure your security. The device is powered by the standard PoE, and is no need to wire extra power supply, which is easy for installation and deployment.

- 7-inch TFT touch screen with 1024 × 600 resolution
- Plug & Play
- Standard PoE power supply
- Live view of the door station and cameras in public areas
- Support multiple languages

▪ Specification

System parameters	
Operating system	Linux
ROM	32 MB
RAM	128 MB
CPU	Embedded processor
Display parameters	
Screen size	7-inch
Operation method	Capactive touch
Type	TFT LCD
Resolution	1024 × 600
Video parameters	
Lens	/
Resolution	/
FOV	/
WDR	/
Video compression standard	/
Focal length	/
Audio parameters	
Audio compression standard	G.711 U, G.711 A
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Event capacity	200 captured pictures (with TF card); 200 alarm records 2 MB RAM (without TF card) reserved for events
Linked indoor extensions capacity	16
Linked network camera capacity	16
Linked doorphone capacity	17 IP doorphones Max.
Network parameters	
Communication protocol	TCP/IP, RTSP
Wired network	Support
Wi-Fi standard	/
Bluetooth version	/
3G/4G standard	/
Zigbee	/
Device interfaces	
Alarm input	8
Network interface	1 RJ-45 10/100 Mbps self-adaptive
TAMPER	/
RS-485	/
USB	/

TF card	/
Alarm output	/
Power interface	1 (12VDC power input)
General	
Button	/
Installation	Surface mounting, table mounting
Indicator	/
Protective level	/
Working temperature	-10 °C to 50 °C (14 °F to 133 °F)
Working humidity	10% to 90%
Dimensions	200 mm × 140 mm × 23.6 mm (7.87" × 5.51" × 0.93")
Battery	/
Power supply	IEEE802.3af, standard PoE 12 VDC
Application environment	Indoor
Power consumption	≤ 3 W
Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese (Brazil), Spanish, Hebrew, Romanian, Turkish, Estonian, Danish, Swedish, Norwegian, Finnish, Vietnamese, Croatian, Slovenian, Serbian, Arabic, Portuguese (Portugal), Lithuanian, Uzbek, Kazakh, Mongolian, Ukrainian
Weight	Without package: 330 g (0.73 lb), With package: 667g (1.47 lb)


▪ Available Model

DS-KH6320-LE1(B)/White

DS-KH6320-LE1(B)/White/HiWatch/标配

DS-KH6320-LE1(B)/White/HiWatch套包专用

▪ Dimension

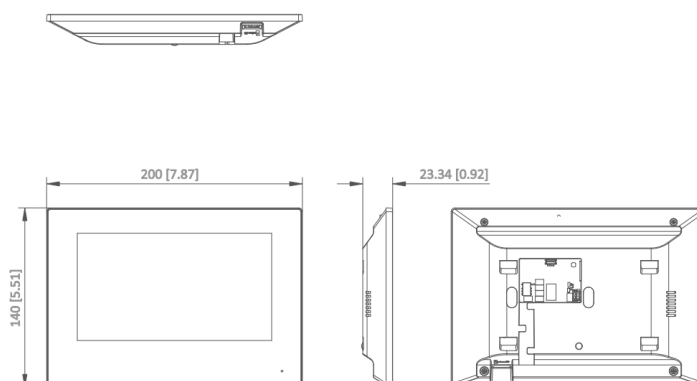

Unit:mm [inch]

SCALE 1:1

- **Accessory**
- **Optional**

**DS-KAW50-1
50W 12V Power
Adapter**



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

