

## DS-K3Y411X Flap Barrier



The DS-K3Y411X series flap barrier with two barriers and 6 pairs IR lights is designed to detect unauthorized entrance or exit. By adopting the flap barrier integrated with the access control system, person should authenticate to pass through the lane via swiping IC or ID card, scanning QR code, etc. It is widely used in attractions, stadiums, construction sites, residences, etc.

- Permissions validation and anti-tailgating.
- Remaining open/closed mode selectable.
- The barrier will be open or stop working when people are nipped.
- Self-detection, Self-diagnostics, and automatic alarm .
- Audible and visual alarm will be triggered when detecting intrusion, tailgating reverse passing, and climbing over barrier.
- TCP/IP network communication: The communication data is specially encrypted to relieve the concern of privacy leak.
- LED indicates the entrance/exit and passing status.
- Fire alarm passing: When the fire alarm is triggered, the barrier will be open automatically for emergency evacuation.



## ▪ Specification

System	
MCBF	> 3 million times
Motor	Brushless motor
Interface	
Network interface	1
RS-485	4
RS-232	4
Lock output	2
IO input	2
IO output	2
Capacity	
Card capacity	60,000
Event capacity	180,000
General	
Throughput	20 to 60 persons per minute The actual throughput is affected by the person passing rate and passing method
Power supply method	100 to 240 VAC, 50 to 60 Hz
IR light detectors	6 pairs
Lane width	600 mm (23.62")
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Barrier material	Acrylic glass
Working humidity	0% to 95% (No condensing)
Pedestal material	SUS304 stainless steel
Dimensions	With packaging: 1360 mm × 440 mm × 1200 mm (53.54" × 17.32" × 47.24") Without packaging: 1207 mm × 315 mm × 990 mm (47.52" × 12.40" × 38.98")
Application environment	Indoor and outdoor
Weight	Net: approximately 50 kg (left)/64 kg (middle)/52 kg (right) (110.3 lb/141.1 lb/114.7 lb) Rough: approximately 80 kg (left)/94 kg (middle)/83 kg (right) (176.4 lb/207.3 lb/183.0 lb)
Approval	CE/FCC/CB/RoHS/REACH/WEEE

## ▪ Maintenance

The main element of the turnstile is stainless steel, which is rustless (antioxidant) and corrosion resistant (The anti corrosion ability in the medium of acid, alkali, and salt). In order to keep the stainless steel from being oxidized or corroded, you should clean and care the turnstile surface periodically .

The instructions and tips for maintaining the turnstile are as follows:


- Select different stainless steel types according to the variety of the environments. You can select 304 stainless steel for common circumstances and 316 stainless steel for the scenarios of seashores and chemical plants.
- Keep the device surface clean and dry.
- Use non-woven cloth and ethyl alcohol to clean the dirt on the device surface.

- Use sourcing pad (do not use mesh cleaning ball) to clean the rust on the device surface by following the wire drawing on the stainless steel. And then use non-woven cloth and stainless steel cleaner to wipe the device surface.
- Clean and maintain the device by using non-woven cloth and stainless steel cleaner periodically. It is suggest to clean the device every month in common circumstances and every week for severe environments (seaside and chemical plants for instance).

▪ **Available Model**

DS-K3Y411I-L1, DS-K3Y411X-L2, DS-K3Y411X-M1, DS-K3Y411X-M2, DS-K3Y411X-R

▪ **Dimension**

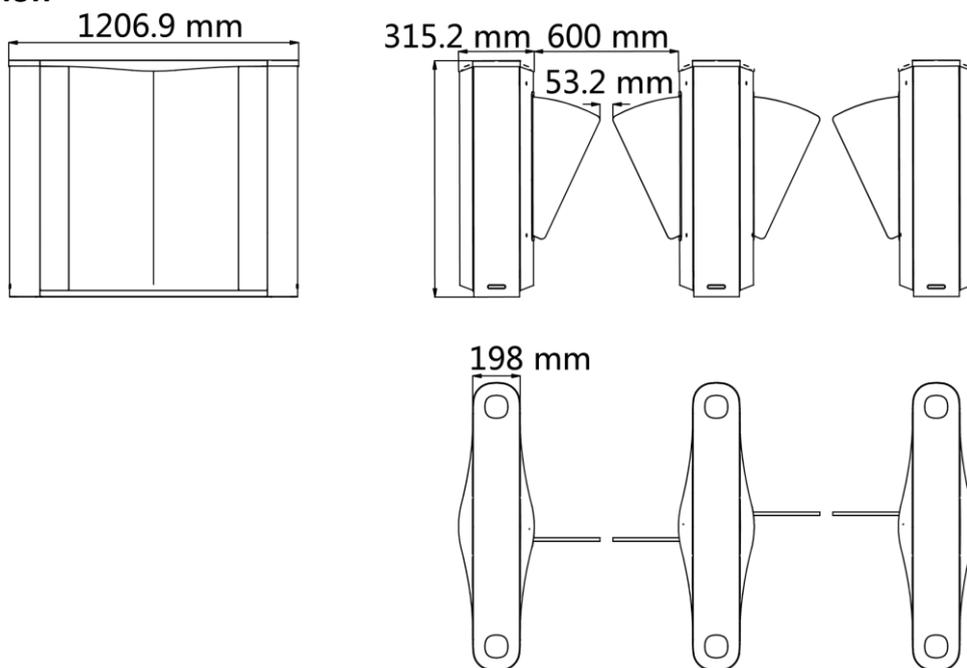

▪ **Accessory**

▪ **Optional**

DS-KAB-COVER	
Barrier's Face Recognition Install Hole's Cover	DS-KAB-COVER-P gQ
	

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com