

**DS-QAZ0206G1-S**  
**6 W Ceiling Secondary Speaker**



- Connecting the primary speaker for amplification.


## ▪ Specification

Speaker	
Rated Power	6 W
Impedance	8 $\Omega$
Sensitivity(1 m, 1 W)	93 dB
Max. Acoustic Pressure	100 dB SPL
Direction	All directions
Frequency Response	300 Hz to 15 kHz
SNR	82 dB
Interface	
Audio In	Fixed resistance input $\times 1$ , 8 $\Omega$ *The primary speaker(6 W, 8 $\Omega$ ) can be connected to a maximum of 1 secondary speaker(6 W, 8 $\Omega$ ).
General	
Operating Temperature	10 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$
Material	Device body: plastic; Mesh cover: metal
Dimension	$\varnothing 179$ mm $\times$ 77.5 mm ( $\varnothing 7.05$ " $\times$ 3.05") (Hole Size: 160 mm)
Package Dimension	255 mm $\times$ 243 mm $\times$ 175 mm (10.04" $\times$ 9.57" $\times$ 6.89")
Weight	Approx. 0.3 kg (0.66 lb.)
With Package Weight	Approx. 0.45 kg (0.99 lb.)
Color	White
Packing List	Device $\times 1$ Mesh cover $\times 1$ Regulatory Compliance and Safety Information $\times 1$
Operating Humidity	< 90% (No condensation)

## ▪ Wiring




Primary Speaker Audio Output Interface

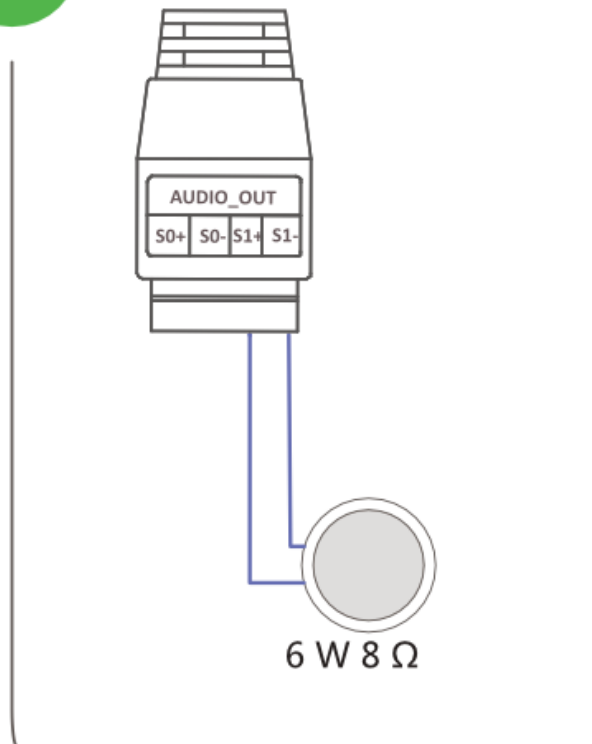

▪ Available Model

DS-QAZ0206G1-S

▪ Dimension

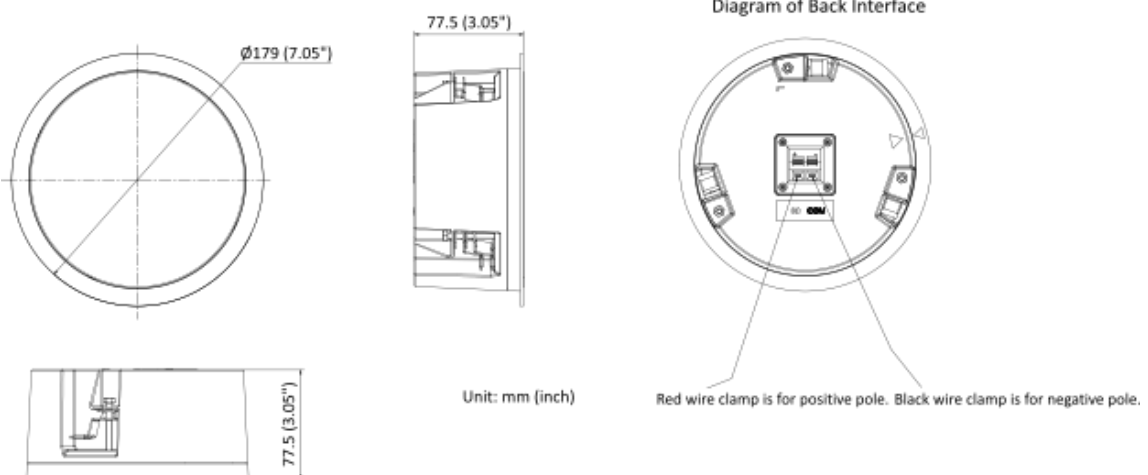



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

