

HiLook

Great View, Great Value

PRODUCT CATALOG

2022 H1

IP Solution / Turbo HD Solution / Transmission

HiLook



Table of Contents

HiLook Overview	1
-----------------	---

Key Features

Safe and Sound	4
See Who's There, Wherever and Whenever	8
Click and Connect	9

Product Showcase

IP Solution	11
Turbo HD Solution	23
Transmission	37
Accessories	39





VIDEO SECURITY SOLUTION

Looking for High Performance? Looking for Low Price? Look at HiLook. HiLook, Hikvision's offshoot brand, hits the bullseye for the entry-level video security market, providing very cost-effective, easy-to-use and reliable products and services.



RELIABLE
QUALITY



EASE OF USE



ATTRACTIVE
PRICE

DIVERSE PRODUCT LINES FOR VARIOUS DEMANDS

HiLook offers an extensive portfolio of products and solutions to meet the wide range of user demands.


IP Solution: Network Cameras, Network PTZ Cameras, NVRs

Turbo HD Solution:

Turbo HD Cameras, Turbo HD PTZ Cameras, Turbo HD DVRs

Transmission: Switches

Expect even more product lines under the HiLook brand in the near future.

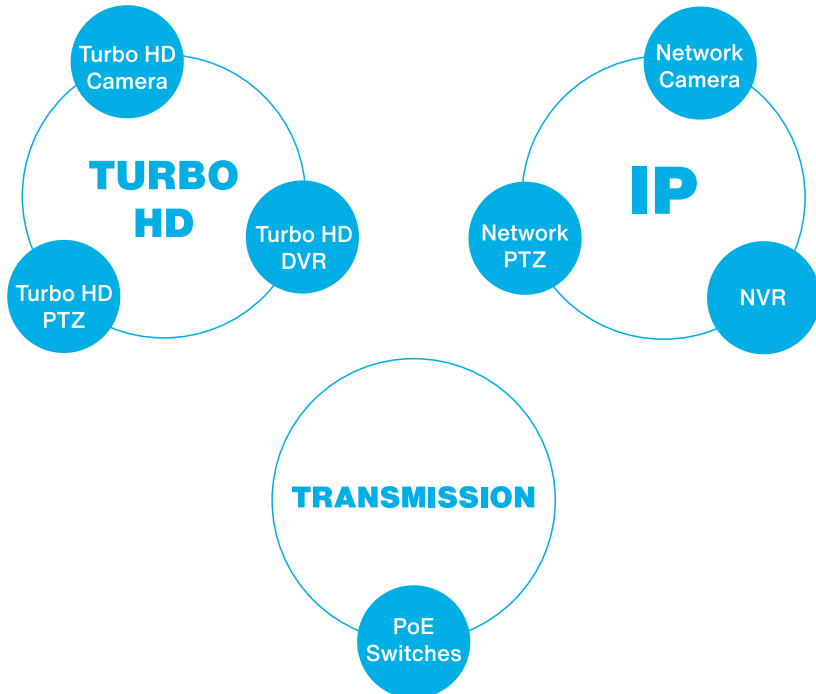

OUTSTANDING PRODUCT QUALITY

The superior cost-efficiency of HiLook products does not imply any compromise in product quality, which are guaranteed by:

- Over 80% automated manufacturing
- Options for more durable materials such as full metal
- Comprehensive authoritative certifications of the industry
- Stringent tests for ingress protection, vandal resistance, aging, etc.




SAFE AND SOUND

Ever So Clear

Cameras with resolutions up to 5 MP capture rich details with wider coverage, providing strong evidence for post-event search.



Prolonged HD recordings enabled by the H.265+ smart codec provides more details to find the right evidence users might have forgotten.

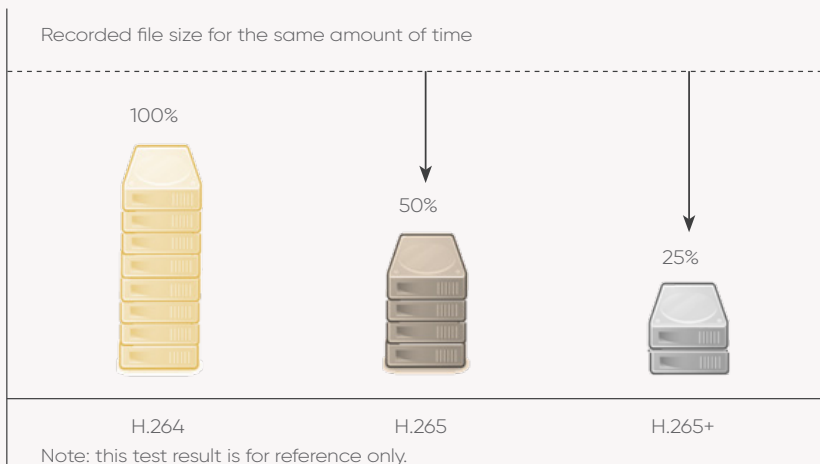



Ever So Bright

The ColorVu technology ensures 24/7 colorful imaging even in dim light conditions, providing a safer night environment for everyone – and available at affordable prices.

Note: refer to page 14-16, 25, and 27-28 for product specifications.




Combining Great Technologies for Greater Image Quality




F1.0 Super Aperture

Collects more light to produce brighter images.



Advanced Sensor

Vastly improves the utilization of available light.



Friendly Lighting

Soft and warm supplemental light works to guarantee colorful images when in zero-light environments.

Ever So Evident

Integrating audio into CCTV security system is a groundbreaking advancement, providing users with more situational awareness and more evidence after an event. Combining audio and video enhances security and will be universal for the video security industry in the future.



SEE WHO'S THERE, WHEREVER AND WHENEVER

The HiLookVision app allows live viewing from anywhere and at any time via smart phones, and sends timely notifications and alarms to end-users when events occur.



Users can also stream the live feed using the HiLookVision PC Client or monitors connected to a DVR or NVR for more details and better viewing experience.




With select NVR models that allow separate video channel output to more than one monitor, you can monitor multiple channels simultaneously and more conveniently.




CLICK AND CONNECT

With HiLook, a professional video security system can be easy. Users can choose and install Wi-Fi products by themselves. The Wi-Fi match function allows automatic connection between cameras and the NVR.

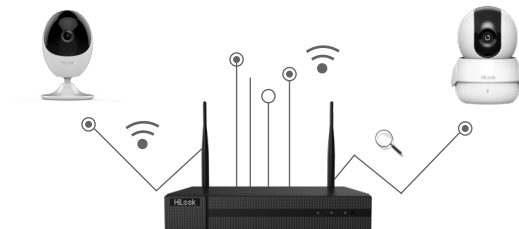

For users preferring non-Wi-Fi products, plug-and-play systems are also available either with PoE models or analog products. Automatic connection is supported by all HiLook products, non-PoE models included.

As a compact solution for the SSMB market, HiLook offers the simplest solutions for security management.

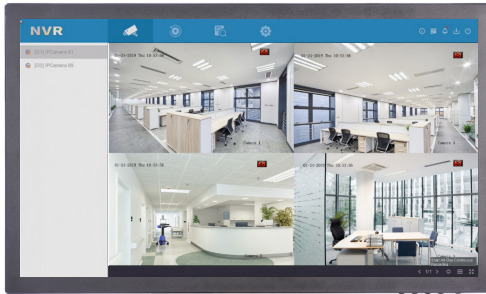

- Simple and concise design with only four necessary models on the dashboard header, making it easier for users to view live, search, and set alarm schedules when needed.

E-UI: Efficient User Interface for HiLook NVRs and DVRs


Forgot a Password? Just Scan and Reset.

Users can reset their NVR or DVR password using the HiLookVision app with a registered account that is bound with their device account. Resetting a password via email is also supported. Both methods are simple and safe.




01

Choose "Verify with HiLookVision"




02

Scan the QR code on the GUI and get a verification code



03

Key in the verification code and reset password



Tips: The HiLookVision account needs to be bound with devices in advance, so we highly recommend binding the device to your HiLookVision app account during activation.



IP SOLUTION

HiLook IP cameras render up to 5 MP, super-HD imaging with an optimized bandwidth via its highly efficient H.265+ video compression. The Wi-Fi models feature flexible, nearly-effortless installation and quick connection for instant view. With no difficult IP setup and only one cable for power and data, the PoE feature connects cameras and NVRs quickly and easily. And the NVRs ensure smooth live view and fluid playback through reliable video recording and management. HiLook is perfect for small business security.



IPC-B150H
5 MP Fixed-lens
Bullet

- Up to 5 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- IR Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Plastic



IPC-D150H
5 MP Fixed-lens
Dome

- Up to 5 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- IR Range: Up to 30 m
- IP67, IK10, 120 dB WDR
- Supports PoE
- Base: Metal, Cover: Plastic



IPC-T250H
5 MP Fixed-lens
Turret

- Up to 5 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- IR Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE
- Camera Body: Metal, Bottom Base: Plastic



IPC-B650H-Z
5 MP Varifocal
Bullet

- Up to 5 MP high resolution
- 2.8 to 12 mm varifocal lens
- Supports H.265 / H.265+, H.264 / H.264+
- IP67, 120 dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -Z: motorized varifocal lens



IPC-D650H-Z
5 MP Varifocal
Dome

- Up to 5 MP high resolution
- 2.8 to 12 mm varifocal lens
- Supports H.265 / H.265+, H.264 / H.264+
- IP67, IK10, 120 dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -Z: motorized varifocal lens



IPC-T651H-Z
5 MP Varifocal
Turret

- Up to 5 MP high resolution
- 2.8 to 12 mm varifocal lens
- Supports H.265+ / H.265, H.264+ / H.264
- IP67, 120 dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- Motorized varifocal lens
- Camera Body: Metal, Bottom Base: Plastic



NEW



IPC-B449H
4 MP Fixed-lens
Bullet with ColorVu

- Up to 4 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- White Light Range: Up to 50 m
- IP67, 120 dB WDR
- Supports PoE
- Front Cover: Metal, Body: Plastic, Bracket: Metal



NEW



IPC-D149H
4 MP Fixed-lens
Dome with ColorVu

- Up to 4 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- IP67, 120 dB WDR
- Supports PoE
- Metal & Plastic



NEW



IPC-B149H
4 MP Fixed-lens
Bullet with ColorVu

- Up to 4 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- White Light Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Metal



NEW



IPC-T249H
4 MP Fixed-lens
Turret with ColorVu

- Up to 4 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- White Light Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE
- Camera Body: Metal, Bottom Base: Plastic



HOT

IPC-B140H
4 MP Fixed-lens
Bullet

- Up to 4 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- IR Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Plastic



HOT

IPC-D140H
4 MP Fixed-lens
Dome

- Up to 4 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265 / H.265+, H.264 / H.264+
- IR Range: Up to 30 m
- IP67, IK10, 120 dB WDR
- Supports PoE
- Base: Metal, Cover: Plastic



IPC-T240H
4 MP Fixed-lens
Turret

HOT

- Up to 4 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265 / H.265+, H.264 / H.264+
- IR Range: Up to 30 m
- IP67, 120 dB WDR
- Supports PoE
- Camera Body: Metal, Bottom Base: Plastic



IPC-B640H-Z
4 MP Varifocal
Bullet

HOT

- Up to 4 MP high resolution
- 2.8 to 12 mm varifocal lens
- Supports H.265+ / H.265, H.264+ / H.264
- IP67, 120 dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -Z: motorized varifocal lens



IPC-D640H-Z
4 MP Varifocal
Dome

HOT

- Up to 4 MP high resolution
- 2.8 to 12 mm varifocal lens
- Supports H.265 / H.265+, H.264 / H.264+
- IP67, IK10, 120 dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -Z: motorized varifocal lens



IPC-T641H-Z
4 MP Varifocal
Turret

- Up to 4 MP high resolution
- 2.8 to 12 mm varifocal lens
- Supports H.265+ / H.265, H.264+ / H.264
- IP67, 120 dB WDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- Motorized varifocal lens
- Camera Body: Metal, Bottom Base: Plastic

ColorVu



IPC-B129H
2 MP Fixed-lens
Bullet with ColorVu

NEW

- Up to 2 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- White Light Range: Up to 30 m
- IP67, DWDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Metal

ColorVu



IPC-T229H
2 MP Fixed-lens
Turret with ColorVu

NEW

- Up to 2 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- White Light Range: Up to 30 m
- IP67, DWDR
- Supports PoE
- Camera Body: Metal, Bottom Base: Plastic

ColorVu

NEW



IPC-B429H
 2 MP Fixed-lens
 Bullet with ColorVu

- Up to 2 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- White Light Range: Up to 50 m
- IP67, DWDR
- Supports PoE
- Front Cover: Metal, Body: Plastic, Bracket: Metal

ColorVu

NEW



IPC-D129H
 2 MP Fixed-lens
 Dome with ColorVu

- Up to 2 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- IP67, DWDR
- Supports PoE
- Metal & Plastic



IPC-B121H
 2 MP Fixed-lens
 Bullet

- Up to 2 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- IR Range: Up to 30 m
- IP67, DWDR
- Supports PoE
- Front Cover: Metal
- Back Cover & Bracket: Plastic



HOT

IPC-D121H
 2 MP Fixed-lens
 Dome

- Up to 2 MP high resolution
- 2.8 or 4 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- IR Range: Up to 30 m
- IP67, IK10, DWDR
- Supports PoE
- Base: Metal, Cover: Plastic



IPC-T221H
 2 MP Fixed-lens
 Turret

- Up to 2 MP high resolution
- 2.8 to 12 mm varifocal lens
- Supports H.265+ / H.265, H.264+ / H.264
- IP67, DWDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -Z: motorized varifocal lens



IPC-B620H-V/Z
 2 MP Varifocal
 Bullet

- Up to 2 MP high resolution
- 2.8 to 12 mm varifocal lens
- Supports H.265+ / H.265, H.264+ / H.264
- IP67, DWDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -Z: motorized varifocal lens



IPC-D620H-V/Z
2 MP Varifocal
Dome

- Up to 2 MP high resolution
- 2.8 to 12 mm varifocal lens
- Supports H.265 / H.265+, H.264 / H.264+
- IP67, IK10, DWDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- -Z: motorized varifocal lens



IPC-T621H-Z
2 MP Varifocal
Turret

- Up to 2 MP high resolution
- 2.8 to 12 mm varifocal lens
- Supports H.265+ / H.265, H.264+ / H.264
- IP67, DWDR
- IR Range: Up to 30 m
- Supports PoE & TF card slot
- Motorized varifocal lens
- Camera Body: Metal, Bottom Base: Plastic



IPC-C120-D/W
2 MP Fixed-lens
Wi-Fi Cube

HOT

- Up to 2 MP high resolution
- 2.0 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- IR Range: Up to 10 m
- DWDR
- Built-in microphone and speaker, supporting two-way audio
- Built-in Wi-Fi
- Camera Body: Plastic, Bottom Base: Plastic



IPC-P120-D/W
2 MP Fixed-lens
Wi-Fi Mini PT

HOT

- Up to 2 MP high resolution
- 2.0 mm fixed lens
- Supports H.265+ / H.265, H.264+ / H.264
- IR Range: Up to 10 m
- DWDR
- Built-in microphone and speaker, supporting two-way audio
- Built-in Wi-Fi
- Camera Body: Plastic, Bottom Base: Plastic



PTZ-P332ZI-DE3
PanoVu Mini
IR PTZ

- 3 × 2 MP panoramic images, PTZ: 4x optical zoom
Color: 0.05 lux @ F2.0
B/W: 0.01 lux @ F2.0"
- Supports H.265
- DWDR
- IR: Up to 10 m
- 12 VDC & PoE+



PTZ-N4225I-DE
4-inch 2 MP
IR PTZ

- Up to 2 MP high definition, 25x optical zoom
Color: 0.005 lux @ F1.6,
B/W: 0.001 lux @ F1.6"
- Supports H.265+ / H.265
- IP66, 120 dB WDR
- IR: 100 m
- 12 VDC & PoE+



PTZ-N4215I-DE
4-inch 2 MP
IR PTZ

- Up to 2 MP high definition, 15x optical zoom
Color: 0.005 lux @ F1.6,
B/W: 0.001 lux @ F1.6"
- Supports H.265+ / H.265
- IP66, 120 dB WDR
- IR: 100 m
- 12 VDC & PoE+



PTZ-N4215-DE3
4-inch 2 MP
Non-IR PTZ

- Up to 2 MP high definition, 15x optical zoom
Color: 0.005 lux @ F1.6,
B/W: 0.001 lux @ F1.6"
- Supports H.265+ / H.265
- 120 dB WDR
- 12 VDC & PoE+



PTZ-N2404I-DE3
2-inch 4 MP
IR PTZ

- Up to 4 MP high definition, 4x optical zoom
Color: 0.005 lux @ F1.6
B/W: 0.001 lux @ F1.6"
- Supports H.265+ / H.265
- IP66, IK10, 120 dB WDR
- IR: Up to 20 m
- 12 VDC & PoE



PTZ-N2204I-DE3
2-inch 2 MP
IR PTZ

- Up to 4 MP high definition, 4x optical zoom
Color: 0.005 lux @ F1.6,
B/W: 0.001 lux @ F1.6"
- Supports H.265+ / H.265
- IP66, IK10, 120 dB WDR
- IR: Up to 20 m
- 12 VDC & PoE



NVR-216MH-C/16P
16-ch 2-HDD
PoE NVR

- 160 Mbps input max.; up to 16 ch. of IP camera input
- 1-ch 8 MP / 5-ch 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 2 SATA interfacess, up to 8 TB
- Supports 16 PoE interfaces
- 380 1U case (Metal)



NVR-216MH-C
16-ch 2-HDD
Non-PoE NVR

- 160 Mbps input max.; up to 16 ch. of IP camera input
- 1-ch 8 MP / 5-ch 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 2 SATA interfacess, up to 8 TB
- 380 1U case (Metal)



NVR-208MH-C/8P
8-ch 2-HDD
PoE NVR

- 80 Mbps input max.; up to 8 ch. of IP camera input
- 1-ch 8 MP / 5-ch 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 2 SATA interfacess, up to 8 TB
- Supports 8 PoE interfaces
- 380 1U case (Metal)



NVR-208MH-C
8-ch 2-HDD
Non-PoE NVR

- 80 Mbps input max.; up to 8 ch. of IP camera input
- 1-ch 8 MP / 5-ch 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 2 SATA interfacess, up to 8 TB
- 380 1U case (Metal)



NVR-116MH-C
16-ch 1-HDD
Non-PoE NVR

- 160 Mbps input max.; up to 16 ch. of IP camera input
- 1-ch 8 MP / 5-ch 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 8 TB
- 260 1U case (Metal)

HOT



NVR-108MH-C/8P
8-ch 1-HDD
PoE NVR

- 80 Mbps input max.; up to 8 ch. of IP camera input
- 1-ch 8 MP / 5-ch 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 8 TB
- Supports 8 PoE interfaces
- 260 1U case (Metal)

HOT



NVR-108MH-C
8-ch 1-HDD
Non-PoE NVR

- 80 Mbps input max.; up to 8 ch. of IP camera input
- 1-ch 8 MP / 5-ch 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 8 TB
- 260 1U case (Metal)

HOT



NVR-104MH-C/4P
4-ch 1-HDD
PoE NVR

- 40 Mbps input max.; up to 4 ch. of IP camera input
- 1-ch 8 MP / 5-ch 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 8 TB
- Supports 4 PoE interfaces
- 260 1U case (Metal)

HOT



NVR-104MH-C
4-ch 1-HDD
Non-PoE NVR

- 40 Mbps input max.; up to 4 ch. of IP camera input
- 1-ch 8 MP / 5-ch 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 8 TB
- 260 1U case (Metal)



NVR-108MH-D/8P
8-ch 1-HDD
PoE NVR

- 60 Mbps input max.; up to 8 ch. of IP camera input
- 2-ch @ 4 MP / 4-ch @ 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 6 TB
- Supports 8 PoE interfaces
- 260 1U case (Metal)



NVR-108MH-D
8-ch 1-HDD
Non-PoE NVR

- 60 Mbps input max.; up to 8 ch. of IP camera input
- 2-ch @ 4 MP / 4-ch @ 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 6 TB
- 260 1U case (Metal)

HOT



NVR-104MH-D/4P
4-ch 1-HDD
PoE NVR

- 40Mbps input max.; up to 4 ch. IP camera input
- 2-ch @ 4 MP / 4-ch @ 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 6 TB
- Supports 4 PoE interfaces
- 260 1U case (Metal)



NVR-104MH-D
4-ch 1-HDD
Non-PoE NVR

- 40 Mbps input max.; up to 4 ch. of IP camera input
- 2-ch @ 4 MP / 4-ch @ 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 6 TB
- 260 1U case (Metal)



NVR-108H-D/8P
8-ch 1-HDD
PoE NVR

- 60 Mbps input max.; up to 8 ch. of IP camera input
- 2-ch @ 4 MP / 4-ch @ 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 6 TB
- Supports 8 PoE interfaces
- Mini 1U Case (Plastic)



NVR-108H-D
8-ch 1-HDD
Non-PoE NVR

- 60 Mbps input max.; up to 8 ch. of IP camera input
- 2-ch @ 4 MP / 4-ch @ 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 6 TB
- Mini 1U Case (Plastic)



NVR-104H-D/4P
4-ch 1-HDD
PoE NVR

- 40 Mbps input max.; up to 4 ch. of IP camera input
- 2-ch @ 4 MP / 4-ch @ 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 6 TB
- Supports 4 PoE interfaces
- Mini 1U Case (Plastic)



NVR-104H-D
4-ch 1-HDD
Non-PoE NVR

- 40 Mbps input max.; up to 4 ch. of IP camera input
- 2-ch @ 4 MP / 4-ch @ 1080p decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 6 TB
- Mini 1U Case (Plastic)



NVR-104MH-D/W
4-ch 1-HDD Wi-Fi
Video Recorder

- 50 Mbps input max.; up to 4 ch. of IP camera input
- 4-ch @ 4MP (12 fps) / 4-ch @ 1080p (25 fps) decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 6 TB
- 260 1U case (Metal)
- Wi-Fi Antenna Structure: 2*MIMO



NVR-108MH-D/W
8-ch 1-HDD Wi-Fi
Video Recorder

- 50 Mbps input max.; up to 8 ch. of IP camera input
- 4-ch @ 4MP (12 fps) / 4-ch @ 1080p (25 fps) decoding capacity
- Supports H.265 / H.265+, H.264 / H.264+
- 1 SATA interface, up to 6 TB
- 260 1U case (Metal)
- Wi-Fi Antenna Structure: 2*MIMO



IK-4042BH-MH/P 2 MP Bullet PoE Kit

- NVR: 4-ch Network Video Recorder
- IPC: 4 * 2 MP Fixed-lens Bullet
- Cable: Four 18-meter Cat 5e network cables, one 2-meter Cat 5e network cable
- Supports 4 PoE interfaces
- Supports H.265 / H.264



IK-4142BH-MH/P 2 MP Bullet PoE Kit

- NVR: 4-ch 1-HDD Network Video Recorder
- IPC: 4 * 2 MP Fixed-lens Bullet
- Cable: Four 18-meter Cat 5e network cable, one 2-meter Cat 5e network cable
- HDD: 1 TB
- Supports 4 PoE interfaces
- Supports H.265 / H.264



IK-4042TH-MH/P 2 MP Turret PoE Kit

- NVR: 4-ch Network Video Recorder
- IPC: 4 * 2 MP Fixed-lens Turret
- Cable: Four 18-meter Cat 5e network cables, one 2-meter Cat 5e network cable
- Supports 4 PoE interfaces
- Supports H.265 / H.264



IK-4142TH-MH/P 2 MP Turret PoE Kit

- NVR: 4-ch 1-HDD Network Video Recorder
- IPC: 4 * 2 MP Fixed-lens Turret
- Cable: Four 18-meter Cat 5e network cables, one 2-meter Cat 5e network cable
- HDD: 1 TB
- Supports 4 PoE interfaces
- Supports H.265 / H.264



IK-4142B-MH/W(B) 2 MP Bullet Wi-Fi Kit

- NVR: 4-ch 1-HDD Wi-Fi Video Recorder
- IPC: 4 * 2 MP IR Fixed Bullet Wi-Fi Camera
- Cable: One 1-meter Cat 5e network cable
- HDD: 1 TB
- Supports H.265 / H.264
- Wi-Fi Antenna Structure: 2*MIMO

HiLook's Turbo HD cameras feature plug-and-play capabilities using coaxial cables and render superior imaging in as little light as 0.005 lux. The PIR detection with strobe light and siren, and compatibility with other brands take this solution far beyond its competitors. HiLook Turbo HD DVRs also feature an easy-to-use UI, giving security personnel powerful camera management and recording with excellent compression technology.

TURBO HD SOLUTION



**NEW**

THC-B150-M
5 MP Fixed-lens
Bullet

- 5 MP CMOS Sensor
- 2.8, 3.6 mm lens
- 20 m IR, ICR, 0.01 lux @ F2.0
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal

**NEW**

THC-B150-P
5 MP Fixed-lens
Bullet

- 5 MP CMOS Sensor
- 2.8, 3.6 mm lens
- 20 m IR, ICR, 0.01 lux @ F2.0
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic

**NEW**

THC-T150-M
5 MP Fixed-lens
Turret

- 5 MP CMOS Sensor
- 2.8, 3.6 mm lens
- 20 m IR, ICR, 0.01 lux @ F2.0
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal

**NEW**

THC-T150-P
5 MP Indoor Fixed-lens
Turret

- 5 MP CMOS Sensor
- 2.8, 3.6 mm lens
- 20 m IR, ICR, 0.01 lux @ F2.0
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-B240-M
4 MP Fixed-lens
Bullet

- 4 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-B240
4 MP Fixed-lens
Bullet

- 4 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic



THC-B140-M
4 MP Fixed-lens
Mini Bullet

- 4 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-B140-P
4 MP Fixed-lens
Mini Bullet

- 4 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-D340-VF
4 MP Varifocal
Dome

- 4 MP CMOS Sensor
- 2.8 to 12 mm varifocal lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, IK10
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-T140-M
4 MP Fixed-lens
Mini Turret

- 4 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-T140
4 MP Fixed-lens
Mini Turret

- 4 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic



THC-T140-P
4 MP Fixed-lens
Mini Turret

- 4 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-T240-M
4 MP Fixed-lens
Turret

- 4 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-T240-P
4 MP Fixed-lens
Turret

- 4 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-B340-VF
4 MP Varifocal
Bullet

- 4 MP CMOS Sensor
- 2.8 to 12 mm varifocal lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic



THC-T340-VF
4 MP Varifocal
Turret

- 4 MP CMOS Sensor
- 2.8 to 12 mm varifocal lens
- 40 m IR, ICR, 0.01 lux @ F1.2,
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu,
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic

ColorVu

HOT



THC-B229-M
2 MP Fixed-lens
Bullet with ColorVu

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm fixed focal lens
- 40 m white light distance, 0.001 lux @ F1.0
- 12 VDC, Smart Light, DWDR, OSD Menu, 3D DNR
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal

ColorVu

HOT



THC-B129-M
2 MP Fixed-lens
Mini Bullet with
ColorVu

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm fixed focal lens
- 20 m white light distance, 0.001 lux @ F1.0
- 12 VDC, Smart Light, DWDR, OSD Menu, 3D DNR
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal

ColorVu

HOT



THC-B129-P
2 MP Fixed-lens
Mini Bullet with
ColorVu

- 2 MP CMOS Sensor
- 2.8 , 3.6 or 6 mm fixed focal lens
- 20 m white light distance, 0.001 lux @ F1.0
- 12 VDC, Smart Light, DWDR, OSD Menu, 3D DNR
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic

ColorVu

HOT



THC-T229-M
2 MP Fixed-lens
Turret with ColorVu

- 2 MP CMOS Sensor
- 2.8 , 3.6 or 6 mm fixed focal lens
- 40 m white light distance, 0.001 lux @ F1.0
- 12 VDC, Smart Light, DWDR, OSD Menu, 3D DNR
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal

ColorVu

HOT



THC-T129-M
2 MP Fixed-lens
Mini Turret with
ColorVu

- 2 MP CMOS Sensor
- 2.8 , 3.6 or 6 mm fixed focal lens
- 20 m white light distance, 0.001 Lux @ F1.0
- 12 VDC, Smart Light, DWDR, OSD Menu, 3D DNR
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal

ColorVu

HOT



THC-T129-P
2 MP Fixed-lens
Mini Turret with
ColorVu

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm fixed focal lens
- 20 m white light distance, 0.001 lux @ F1.0
- 12 VDC, Smart Light, DWDR, OSD Menu, 3D DNR
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-B223-M
2 MP Fixed-lens
Bullet

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 50 m IR, ICR, 0.005 lux @ F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-B223
2 MP Fixed-lens
Bullet

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 50 m IR, ICR, 0.005 lux @ F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic

Turbo HD Camera



THC-B123-M
2 MP Fixed-lens
Mini Bullet

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 30 m IR, ICR, 0.005 lux @ F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-B123-P
2 MP Fixed-lens
Mini Bullet

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 30 m IR, ICR, 0.005 lux @ F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-T123-M
2 MP Fixed-lens
Mini Turret

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 50 m IR, ICR, 0.005 lux @ F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-T123
2 MP Fixed-lens
Mini Turret

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 30 m IR, ICR, 0.005 lux @ F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic



THC-T123-P
2 MP Fixed-lens
Mini Turret

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 30 m IR, ICR, 0.005 lux @ F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-T223-M
2 MP Fixed-lens
Turret

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 50 m IR, ICR, 0.005 lux @ F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-T223-P
2 MP Fixed-lens
Turret

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 50 m IR, ICR, 0.005 lux @ F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-B323-Z
2 MP Varifocal
Bullet

- 2 MP CMOS Sensor
- 2.7 to 13.5 mm varifocal lens
- 70 m IR, ICR, 0.005 lux @ F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu, Auto Focus
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-D323-Z
2 MP Varifocal
Dome

- 2 MP CMOS Sensor
- 2.7 to 13.5 mm varifocal lens
- 70 m IR, ICR, 0.005 lux @ F1.2
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu, Auto Focus
- IP66, IK10
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-T323-Z
2 MP Varifocal
Turret

- 2 MP CMOS Sensor
- 2.7 to 13.5 mm varifocal lens
- 70 m IR, ICR, 0.005 lux @ F1.2,
- 12 VDC, Smart IR, True WDR, 3D DNR, OSD Menu, Auto Focus
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-B120-MS
2 MP Built-in Mic
Bullet

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 30 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Audio: Built-in microphone
- Material: Metal



THC-B120-PS
2 MP Built-in Mic
Bullet

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 25 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Audio: Built-in microphone
- Material: Plastic



THC-T220-MS
2 MP Built-in Mic
Turret

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Audio: Built-in microphone
- Material: Metal



THC-T120-MS
2 MP Built-in Mic
Turret

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 30 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Audio: Built-in microphone
- Material: Metal



THC-T120-PS
2 MP Built-in Mic
Turret

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- Supports HD-TVI / AHD / CVI / CVBS video output
- Audio: Built-in microphone
- Material: Plastic



THC-B220-M
2 MP Fixed-lens
Bullet

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-B220
2 MP Fixed-lens
Bullet

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic



THC-B120-M
2 MP Fixed-lens
Mini Bullet

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-B120-P(B)
2 MP Fixed-lens
Mini Bullet

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-T120-M
2 MP Fixed-lens
Mini Turret

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-T120
2 MP Fixed-lens
Mini Turret

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic



THC-T120-P
2 MP Fixed-lens
Mini Turret

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-T220-M
2 MP Fixed-lens
Turret

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-T220-P
2 MP Fixed-lens
Turret

- 2 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-B320-VF
2 MP Varifocal
Bullet

- 2 MP CMOS Sensor
- 2.8 to 12 mm varifocal lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic



THC-D320-VF
2 MP Varifocal
Dome

- 2 MP CMOS Sensor
- 2.8 to 12 mm varifocal lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, IK10
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-T320-VF
2 MP Varifocal
Turret

- 2 MP CMOS Sensor
- 2.8 to 12 mm varifocal lens
- 40 m IR, ICR, 0.01 lux @ F1.2,
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu,
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic



THC-B210-M
1 MP Fixed-lens
Bullet

- 1 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-B210
1 MP Fixed-lens
Bullet

- 1 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic



THC-B110-M
1 MP Fixed-lens
Mini Bullet

- 1 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-B110-P(B)
1 MP Fixed-lens
Mini Bullet

- 1 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-T110-M
1 MP Fixed-lens
Mini Turret

- 1 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-T110
1 MP Fixed-lens
Mini Turret

- 1 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic



THC-T110-P
1 MP Fixed-lens
Mini Turret

- 1 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 20 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-T210-M
1 MP Fixed-lens
Turret

- 1 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-T210-P
1 MP Fixed-lens
Turret

- 1 MP CMOS Sensor
- 2.8, 3.6 or 6 mm lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Plastic



THC-B310-VF
1 MP Varifocal
Bullet

- 1 MP CMOS Sensor
- 2.8 to 12 mm varifocal lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic



THC-D310-VF
1 MP Varifocal
Dome

- 1 MP CMOS Sensor
- 2.8 to 12 mm varifocal lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66, IK10
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal



THC-T310-VF
1 MP Varifocal
Turret

- 1 MP CMOS Sensor
- 2.8 to 12 mm varifocal lens
- 40 m IR, ICR, 0.01 lux @ F1.2
- 12 VDC, Smart IR, DWDR, DNR, OSD Menu
- IP66
- Supports HD-TVI / AHD / CVI / CVBS video output
- Material: Metal & Plastic



PTZ-T4225I-D
4-inch 2 MP
IR PTZ

- Up to 2 MP high definition, 25x optical zoom
- Color: 0.005 lux @ F1.6, B/W: 0.001 lux @ F1.6
- IP66, 120 dB WDR
- IR: 100 m, 12 VDC
- 8 privacy masks



PTZ-T4215I-D
4-inch 2 MP
IR PTZ

- Up to 2 MP high definition, 15x optical zoom
- Color: 0.005 lux @ F1.6, B/W: 0.001 lux @ F1.6
- IP66, 120 dB WDR
- IR: 100 m, 12 VDC
- 8 privacy masks



PTZ-T4215-D3
4-inch 2 MP
Non-IR PTZ

- Up to 2 MP high definition, 15x optical zoom
- Color: 0.005 lux @ F1.6, B/W: 0.001 lux @ F1.6
- 120 dB WDR
- 12 VDC
- 8 privacy masks

5 MP HOT



DVR-204U-K1
4-ch 1-HDD DVR

- 4-ch HD-TVI / AHD / CVI / CVBS video
- 1-ch, RCA (2.0 Vp-p, 1 KΩ)
4-ch audio via coaxial cable
- Up to 8 channels of IP video input (up to 8 MP resolution)
- H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264
- 5 MP @ 12 fps/ch
- 260 1U case

5 MP HOT



DVR-208U-K1
8-ch 1-HDD DVR

- 8-ch HD-TVI / AHD / CVI / CVBS video
- 1-ch, RCA (2.0 Vp-p, 1 KΩ)
8-ch audio via coaxial cable
- Up to 16 channels of IP video input (up to 8 MP resolution)
- H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264
- 8 MP @ 8 fps/ch
- 260 1U case

5 MP HOT



DVR-216U-K2
16-ch 2-HDD DVR

- 16-ch HD-TVI / AHD / CVI / CVBS video
- 1-ch, RCA (2.0 Vp-p, 1 KΩ)
16-ch audio via coaxial cable
- Up to 32 channels of IP video input (up to 8 MP resolution)
- H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264
- 8 MP @ 8 fps/ch
- 380 1U case

1080p HOT



DVR-204Q-K1
4-ch 1-HDD DVR

- 4-ch HD-TVI / AHD / CVI / CVBS video
- 1-ch, RCA (2.0 Vp-p, 1 KΩ)
4-ch audio via coaxial cable
- Up to 6 channels of IP video input (up to 6 MP resolution)
- H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264
- 4 MP Lite @ 15 fps/ch
- 260 1U case

1080p HOT



DVR-208Q-K1
8-ch 1-HDD DVR

- 8-ch HD-TVI / AHD / CVI / CVBS video
- 1-ch, RCA (2.0 Vp-p, 1 KΩ)
8-ch audio via coaxial cable
- Up to 12 channels of IP video input (up to 6 MP resolution)
- H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264
- 4 MP Lite @ 15 fps/ch
- 260 1U case

1080p HOT



DVR-216Q-K1
16-ch 1-HDD DVR

- 16-ch HD-TVI / AHD / CVI / CVBS video
- 1-ch, RCA (2.0 Vp-p, 1 KΩ)
16-ch audio via coaxial cable
- Up to 24 channels of IP video input (up to 6 MP resolution)
- H.265 Pro+ / H.265 Pro / H.265 / H.264+ / H.264
- 4 MP Lite @ 15 fps/ch
- 260 1U case

HOT 1080p



DVR-204G-K1
4-ch 1-HDD DVR

- 4-ch HD-TVI / AHD / CVI / CVBS video & 1-ch audio input
- 1-ch, RCA (2.0 Vp-p, 1 KΩ)
4-ch audio via coaxial cable
- Up to 5 channels of IP video input (up to 1080p resolution)
- 1 SATA interface, HD 1080p Lite @ 25 fps/ch
- 260 1U case

HOT 1080p Lite



DVR-208G-K1
8-ch 1-HDD DVR

- 8-ch HD-TVI / AHD / CVI / CVBS video & 1-ch audio input
- 1-ch, RCA (2.0 Vp-p, 1 KΩ)
8-ch audio via coaxial cable
- Up to 10 channels of IP video input (up to 1080p resolution)
- 1 SATA interface, HD 1080p Lite @ 12 fps/ch
- 260 1U case

HOT 1080p Lite



DVR-216G-K1
16-ch 1-HDD DVR

- 16-ch HD-TVI / AHD / CVI / CVBS video & 1-ch audio input
- 1-ch, RCA (2.0 Vp-p, 1 KΩ)
16-ch audio via coaxial cable
- Up to 18 channels of IP video input (up to 5 MP resolution)
- 1 SATA interface, HD 1080p Lite @ 15 fps/ch
- 260 1U case

1080p Lite **HOT**



DVR-104G-K1
4-ch 1-HDD DVR

- 4-ch HD-TVI / AHD / CVI / CVBS video & 1-ch audio input
- 1-ch, RCA (2.0 Vp-p, 1 KΩ)
4-ch audio via coaxial cable
- Up to 5 channels of IP video input (up to 1080p resolution)
- 1 SATA interface, HD 1080p Lite @ 25 fps/ch
- Mini case

1080p Lite **HOT**



DVR-108G-K1
8-ch 1-HDD DVR


- 8-ch HD-TVI / AHD / CVI / CVBS video & 1-ch audio input
- 1-ch, RCA (2.0 Vp-p, 1 KΩ)
8-ch audio via coaxial cable
- Up to 10 channels of IP video input (up to 5 MP resolution)
- 1 SATA interface, HD 1080p Lite @ 25 fps/ch.
- Mini case

1080p Lite **HOT**



DVR-116G-K1
16-ch 1-HDD DVR

- 16-ch HD-TVI / AHD / CVI / CVBS video & 1-ch audio input
- 1-ch, RCA (2.0 Vp-p, 1 KΩ)
16-ch audio via coaxial cable
- Up to 18 channels of IP video input (up to 5 MP resolution)
- 1 SATA interface, HD 1080p Lite @ 15 fps/ch.
- Mini case

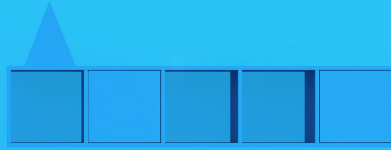

TRANSMISSION



With an incredible cost-to-performance ratio, HiLook switches feature the most reliable performance for the price. The switches support a generous Power-over-Ethernet (PoE) distance – up to 250 meters – minimizing both network investment and maintenance efforts. Additionally, their 8-core technology guarantees stable power to the switches.



NS-0105P-35(B)
Unmanaged PoE
Switch

- L2, Unmanaged
- 4 * 100 M PoE port
- 1 * 100 M uplink port
- 802.3af and 802.3at
- 35 W PoE power budget
- Max. 250-meter long-distance transmission



NS-0109P-60(B)
Unmanaged PoE
Switch

- L2, Unmanaged
- 8 * 100 M PoE port
- 1 * 100 M uplink port
- 802.3af and 802.3at
- 60 W PoE power budget
- Max. 250-meter long-distance transmission



NS-0106P-35
Unmanaged PoE
Switch

- L2, Unmanaged
- 4 * 10/100 M PoE port
- 2 * 10/100 M uplink port
- 802.3af and 802.3at
- 35 W PoE power budget
- Max. 250-meter long-distance transmission



NS-0310P-60
Unmanaged PoE
Switch

- L2, Unmanaged
- 8 * 10/100 M PoE port
- 2 * Gigabit uplink port
- 802.3af and 802.3at
- 60 W PoE power budget
- Max. 250-meter long-distance transmission



NS-0318P-130(B)
Unmanaged PoE
Switch

- L2, Unmanaged
- 16 * 100 M PoE port
- 1 * 1000 M RJ45
- 1 * 1000 M SFP
- 802.3af and 802.3at
- 130 W PoE power budget
- "Extend" Mode: Port 9-16, max. 250-meter long-distance transmission



NS-0326P-230(B)
Unmanaged PoE
Switch

- L2, Unmanaged
- 24 * 100 M PoE port
- 1 * 1000 M RJ45
- 1 * 1000 M SFP
- 802.3af and 802.3at
- 230 W PoE power budget
- "Extend" Mode: Port 17-24, max. 250-meter long-distance transmission

Brackets of Network Cameras

B1 Series Fixed-lens Bullet



HIA-J101
Junction box

D1 Series Fixed-lens Dome



HIA-J204
Inclined ceiling
mount



HIA-B401-110
Wall mount



HIA-B401-110B
Wall mount



HIA-B101-110
Pendant mount



HIA-B201
Corner mount



HIA-P101
Rain shade



HIA-P103
Rain shade



HIA-J104-DM18
Junction box



HIA-B403
Wall mount

T2 Series Fixed-lens Turret



HIA-B301
Vertical pole mount



HIA-B201
Corner mount



HIA-B401-110T
Wall mount



HIA-J102
Junction box

B6 Series Varifocal Bullet



HIA-B301
Vertical pole mount



HIA-J102
Junction box



HIA-J105
Junction box



HIA-B201
Corner mount

D6 Series Varifocal Dome



HIA-B101-135
Pendant mount



HIA-B402-135
Wall mount



HIA-B402-135B
Pendant mount/junction box



HIA-B302
Vertical pole mount



HIA-B202
Corner mount



HIA-B501
In-ceiling mount



HIA-J104-DM21
Junction box



HIA-J203-DM23
Inclined ceiling mount



HIA-P102
Rain shade



HIA-P103
Rain shade



HIA-B404
Wall mount



D20-AP
Adapter plate

D7 Series Varifocal Dome



HIA-B401-120
Wall mount




HIA-B401-120B
Wall mount



HIA-B101-120
Pendant mount



HIA-B201
Corner mount



HIA-B301
Vertical pole mount



HIA-J104-DM46
Junction box

T6 series Varifoca Turret



HIA-B402-130T
Wall mount



HIA-B101-130T
Pendant mount



HIA-B301
Vertical pole mount



HIA-B201
Corner mount



HIA-J103
Junction box



HIA-J202
Inclined ceiling mount

Brackets of Turbo HD Cameras

T1 (P) (M) Series Mini Turret



HIA-B301
Vertical pole mount



HIA-B201
Corner mount



HIA-J101
Junction box



HIA-B401-110T
Wall mount

T2 (P) Series Turret



HIA-B301
Vertical pole mount



HIA-B201
Corner mount



HIA-J102
Junction box



HIA-J201
Inclined ceiling mount



HIA-B401-110T
Wall mount

T2 (M) Series Turret



HIA-B301
Vertical pole mount



HIA-B201
Corner mount



HIA-J103
Junction box



HIA-J202
Inclined ceiling mount



HIA-B402-130T
Wall mount

T3 Series Varifocal Turret



HIA-B301
Vertical pole mount



HIA-B201
Corner mount



HIA-J103
Junction box



HIA-J202
Inclined ceiling mount



HIA-B402-130T
Wall mount



HIA-B101-130T
Pendant mount

B1/B2 Series Mini Bullet



HIA-J101
Junction box

B3 Series Varifocal Bullet



HIA-B301
Vertical pole mount



HIA-B201
Corner mount



HIA-J102
Junction box


B3 Series Varifocal Bullet




HIA-B301
Vertical pole mount



HIA-B201
Corner mount



HIA-J104-DM45
Junction box



HIA-J203-DM45
Inclined ceiling
mount



HIA-B402-DM45
Wall mount



HIA-B101-DM45
Pendant mount



HIA-P102
Rain shade

Brackets of PTZ Cameras

2-inch PTZ



HIA-B404-PT
Wall mount

PanoVu Mini



HIA-B404-T
Wall mount



HIA-B101-PT10
Pendant mount

4-inch PTZ



HIA-B171
Pendant mount



HIA-B172
Pendant mount



HIA-B173
Ceiling mount



HIA-B473
Parapet wall mount



HIA-B471
Wall mount with junction box



HIA-B471-P
Vertical pole mount



HIA-B471-C
Corner mount



HIA-B471-B
Wall mount with junction box



HIA-B471-BP
Vertical pole mount with junction box



HIA-B471-BC
Wall mount with junction box



HIA-B371
Gooseneck mount



HIA-B472
Wall mount (short arm)

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
Business: overseasbusiness@hikvision.com
Technical Support: support@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Egypt
T +20223066117
sales.eg@hikvision.com

Hikvision Germany
sales.dach@hikvision.com

Hikvision India
T +91-22-6855 9944
sales@pramahikvision.com

Hikvision Italy
T +39 0438 6902
info.it@hikvision.com

Hikvision Korea
T +82-1661-8138
sales.korea@hikvision.com

Hikvision New Zealand
T 09 217 3127
salesnz@hikvision.com

Hikvision Philippines
support.ph@hikvision.com

Hikvision Romania
marketing.ro@hikvision.com

Hikvision Spain
T +34 91 737 16 55
info.es@hikvision.com

Hikvision Turkey
T +90 216 521 70 70
support.tr@hikvision.com

Hikvision Uzbekistan
T +998-71-233-55-50
uzbekistan@hikvision.com

Hikvision Azerbaijan
T +994 50 369 81 57
Azerbaijan.CATC@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com

Hikvision Europe
T +31 23 5542770
sales.eu@hikvision.com

Hikvision Hong Kong , China
sales.hk@hikvision.com

Hikvision Indonesia
T +6221 2933 9366
Sales.Indonesia@hikvision.com

Hikvision Kazakhstan
T +7 (727) 291-75-88
support@hikvision.kz

Hikvision Malaysia
T +60327224000
sales.my@hikvision.com

Hikvision New Panama
Sales.centralamerica@hikvision.com

Hikvision Poland
T +48 22 460 01 50
info.pl@hikvision.com

Hikvision Singapore
T +65 6684 4718
sg@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Brazil
T +55-11-3318-0050
Latam.support@hikvision.com

Hikvision Czech
T +420 29 6182640
info.cz@hikvision.com

Hikvision France
T +33(0)1 85 330 450
info.fr@hikvision.com

Hikvision Hungary KFT
info.hu@hikvision.com

Hikvision Israel
T +972 79 5555590
sales.israel@hikvision.com

Hikvision Kenya
wangchengbin@hikvision.com

Hikvision Mexico
T +52 55 2624 0110
sales.mexico@hikvision.com

Hikvision Pakistan
T +92-2135147526
support.pk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision South Africa
T +27 877018113
sale.africa@hikvision.com

Hikvision Thailand
sales.thailand@hikvision.com

Hikvision UK & Ireland
T +44(0)1628 902 140
info.uk@hikvision.com

Hikvision Vietnam
T +84 24 7300 7586
sale.vn@hikvision.com

Follow us on social media to get the latest product and solution information



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



hikvisionhq



Hikvision Corporate Channel



PRODUCT CATALOG

IP Solution

Turbo HD Solution

Transmission

2022 H1