


# You're Always at Home with Hikvision's Video Doorbell



Answer your door and monitor your home from anywhere with Hikvision's new 3 MP Video Doorbell Camera (DS-HD1). You can see, hear and speak to anyone at your door from your smartphone or tablet using our free Hik-Connect app. 

The video doorbell comes with adjustable PIR motion-detection zones to focus on the most important areas around your door. When a visitor enters a pre-set zone near your door, or when the doorbell is pressed, an alert is triggered and you'll receive a notification on your phone or tablet.

Featuring live on-demand video streaming, two-way audio, built-in IR illumination for night vision, and weather-resistant design, your home is protected around-the-clock, day and night, rain or shine. Hikvision's Video Doorbell is affordable and can be installed in minutes. It easily integrates with Hikvision NVRs and with your Hikvision security system

Whether you're on vacation, away on business, or just too busy with the daily tasks at home, Hikvision's Video Doorbell lets you answer your door from anywhere, at any time. With the Hikvision Video Doorbell, you're always at home.



**PIR** PIR (Passive Infrared) Motion Detection  
Detects Motion at the Door



Dual-Band Wi-Fi for Easy  
and Reliable Connection



High Definition 3 MP Video for Clear  
Images and Easy Identification



IR Illumination for Night Vision  
Up To 16 Feet (4.87 m)



Built-In Speaker and Microphone  
Supports Two-Way Audio




Store Video Recordings On MicroSD  
card or Hikvision NVR (optional)



Wide Field-Of-View Up To 180° Vertical,  
See Entire Area and Visitors From  
Head To Toe



Easy to Install with Interchangeable Black,  
Gray or White Faceplates To Match Décor

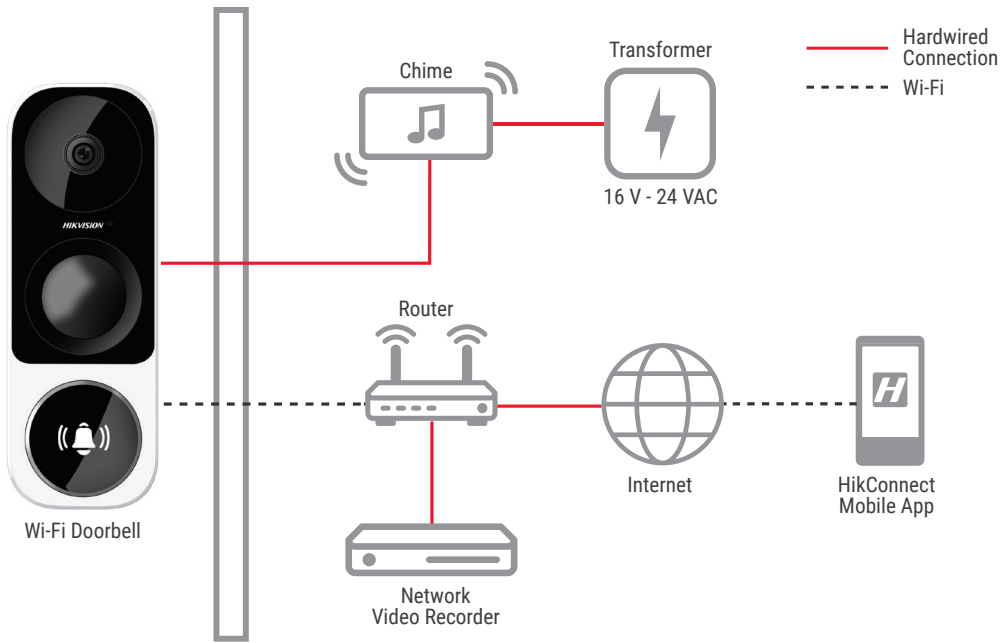

### Wi-Fi Doorbell Specs

<b>Product no.</b>	DS-HD1
<b>Sensor</b>	1/2.8" 3 MP starlight sensor
<b>Lens</b>	2.2 mm @ f2.4
<b>Field of View</b>	Vertical FOV 180°, horizontal FOV 105°
<b>IR</b>	Up to 16 ft (4.87 m)
<b>Compression Standard</b>	H.264
<b>Maximum Resolution</b>	2048 x 1536, QXGA
<b>Frame Rate</b>	30 fps, adaptive network frame rate
<b>DNR</b>	3D DNR
<b>WDR</b>	DWDR
<b>BLC</b>	Supported
<b>Audio Input</b>	Built-in omnidirectional microphone
<b>Audio</b>	Output Built-in loud speaker
<b>Audio Quality</b>	Noise suppression and echo cancellation
<b>Wireless</b>	Built-in 2.4 GHz and 5 GHz Wi-Fi
<b>Network Configuration</b>	AP pairing
<b>Supported Software</b>	iVMS-4200, HikCentral, Hik-Connect, Hikvision Views
<b>Local Storage</b>	Up to 128 GB microSD card
<b>Sensor</b>	PIR detection sensor
<b>Alarm</b>	Customized alert area
<b>Working Temperature</b>	-22° F to 140° F (-30° C to 60° C)
<b>Working Humidity Humidity</b>	less than 95% (no condensation)
<b>Power Supply</b>	16 to 24 VAC
<b>Power Consumption</b>	Maximum 5 W
<b>Protection</b>	IP65
<b>Dimensions</b>	5.12" x 1.83" x 0.85" (130 mm x 46.3 mm x 21.5 mm)
<b>Weight</b>	0.28 lbs (125 g)