How to Configure the Advertisement Picture for MinMoe Terminal
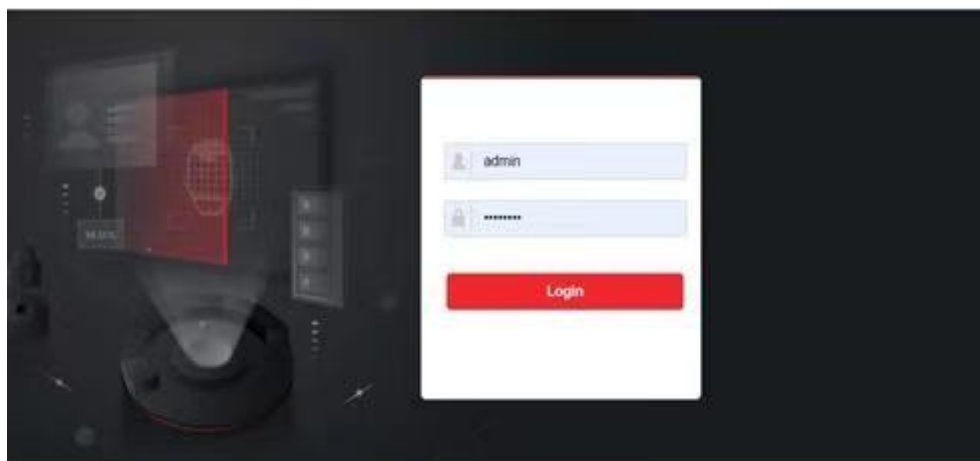
Preparation

This document displays guidance on how to configure the required advertisement picture for MinMoe access control terminal in the web of this device with its IP.

How to configure the advertisement picture for MinMoe terminal (Latest firmware version)
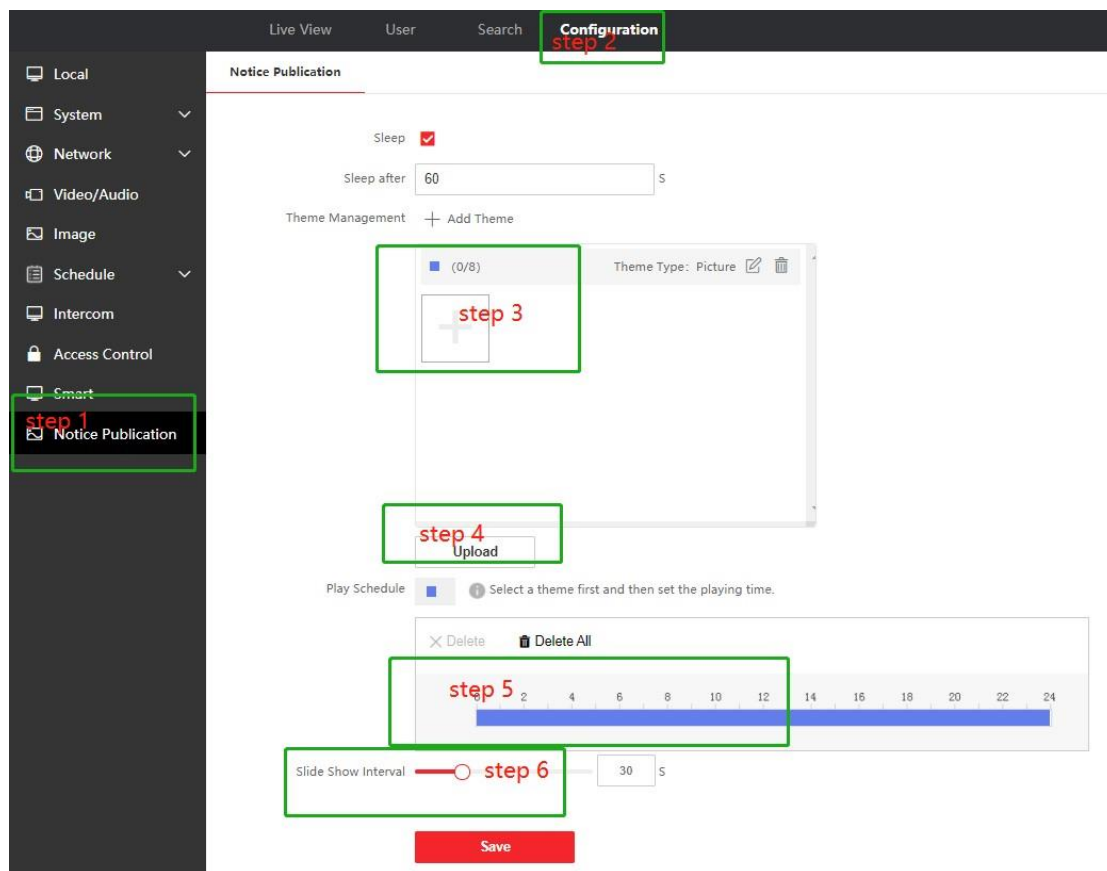
1. Configure the required advertisement in the web of the device

1) Open the web of device with its IP
2) Log in to the web of this device

3) Upload the required advertisement (Notice publication→ Configuration→ Upload)

Step 1: Click Notice Publication

Step 2: Click Configuration

Step 3: Click the plus button and choose the required advertisement pictures.

Step 4: Click upload button.

Step 5: Set the playing time of the advertisement.

Step 6: Set the slide Show Interval

Notice:

1）**Only a single client configuration of advertisement pictures in the web is supported and multiple client operations may cause the problem that advertisement pictures cannot be deleted.**

2）**The advertising image resolution should meet the requirements of min = 32 * 32 and max = 3072 * 3072**

See Far, Go Further