

## DS-D5032FT 32" LED Monitor

### Overview

DS-D5032FT is a reliable surveillance display with LED backlit technology, excellent color reduction and image processing, truly display the video details. Multiply interfaces are able to meet various surveillance environments, and build-in speaker is convenient to audio play. DS-D5032FT is an ideal choice for security and surveillance application.


### Key Features

- LED backlit technology with full HD 1920×1080
- Wide view angle: 178°(H)/178°(V)
- Image processing: 3D comb filter, 3D De-interlace, 3D noise reduction, Skin correction
- Multiply inputs: HDMI, VGA, DVI, BNC, USB, audio in
- Build-in speaker
- Image freeze
- High reliable components for 7×24 working
- VESA stand bracket

### Model:

DS-D5032FT

### Dimension:

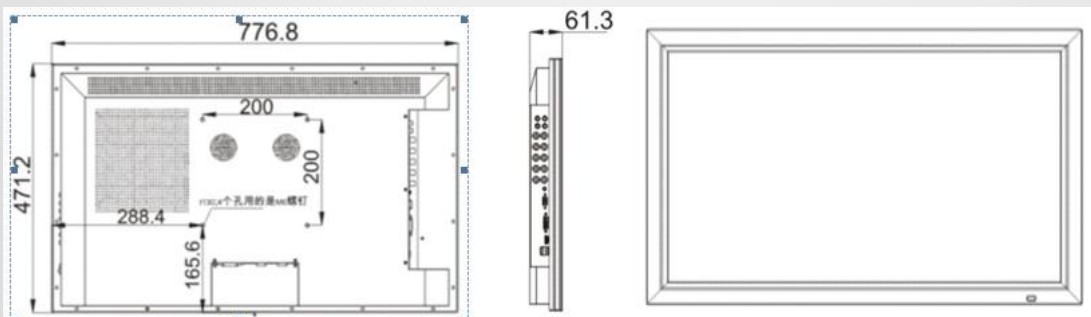

# DS-D5032FT 32" LED Monitor



<b>Model</b>	DS-D5032FT
<b>Display</b>	
<b>Display Type</b>	LED-Backlit TFT
<b>Screen Size</b>	32"
<b>Pixel Pitch(H×V)</b>	0.807mm×0.807mm
<b>Max Resolution</b>	1920×1080
<b>Brightness</b>	450cd/m2 (Typical)
<b>Contrast</b>	4000:1 (Typical)
	2,000,000 : 1 (Dynamic)
<b>Response Time</b>	8ms
<b>Color</b>	16.7M
<b>Viewing Angle</b>	Horizontal 178°, Vertical 178°
<b>Input</b>	
<b>HDMI</b>	HDMI×1
<b>VGA</b>	VGA×1
<b>DVI</b>	DVI×1
<b>BNC</b>	BNC×1
<b>USB</b>	USB×1
<b>Audio</b>	
<b>Audio Input</b>	1, 3.5 mm mini-jack
<b>Audio Out</b>	1, 3.5 mm mini-jack
<b>Speaker</b>	3W ×2
<b>Mounting</b>	
<b>VESA</b>	200mm × 200mm
<b>General</b>	
<b>Power Supply</b>	AC100 ~ 220V, 50 / 60Hz
<b>Consumption</b>	< 75W(on) < 1W(Standby)
<b>Operation Temperature</b>	0°C ~ 40 °C
<b>Operating Humidity</b>	10%~85% (No Condensation)
<b>Storage Temperature</b>	-20°C ~ 55°C
<b>Storage Humidity</b>	5%~95% (No Condensation)
<b>Dimension (W×H×D)</b>	737.4mm×452.5mm×70.65mm (29.03" × 17.81" × 2.78")
<b>Weight</b>	19Kg(Gross weight)