

## DS-1331HZ-CI

Outdoor Housing



### Features:

- Adopt side-cover design for convenient installation and maintenance.
- Adopt stainless steel dual-hasps design, water-proof up to IP 67
- Adopt hard coated Polycarbonate to protect imaging area
- Built-in automatic temperature control system to ensure stable running.
- Impact protection is up to IK10


### Notice:

- Read the instructions carefully and observe all warnings before installing this equipment.
- Turn off the power before wiping this equipment, do not use liquid or spray cleaning agent.
- Do not install on unstable bracket.
- Protect the power line, especially the flexible line of the plug and camera.

### Order Model:

DS-1331HZ-CI

### Dimension:

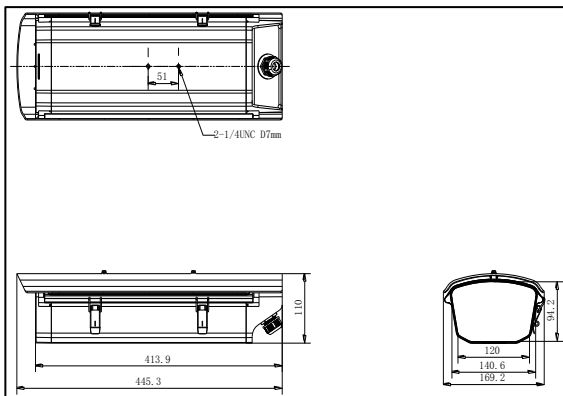

### Parameter:

Parameters	Model	DS-1331HZ-CI
		Outdoor Housing
Produce features		Contain fan, suitable for high temperature environment
Working temperature		-20°C ~ +60°C, Humidity 95% or less (non-condensing)
Automatic temperature control range		Without heating Fan on: 45°±5°C Fan off: 35°±5°C
Power		DC12V
Power consumption		Fan: 4W
Protection level		IP67
Impact Protection		IK10
Material		Main: aluminum alloy Window: <b>hard coated Polycarbonate</b>
Dimension(mm)		455.3×169.2×110
Matching power supply		DC12V 2A Power pack
Weight		1900g

### Installation:



DS-1293ZJ Wall Mount



DS-1214ZJ Horizontal Pole Mount



DS-1269ZJ Pendant Mount

### Wiring:

