

AE-VC211T-IRS(2.8mm)(海外标配)/新



- 2 Megapixel Progressive CMOS sensor
- Up to 1080P resolution
- Smart IR, AGC
- RGB-IR
- Internal 3-axis adjustment
- Built-in microphone

▪ Specification

Model		AE-VC211T-IRS(2.8mm)(海外标配)/新
Camera	Image Sensor	2 Megapixel Progressive CMOS Sensor
	Min. Illumination	0.01 Lux @ (F1.2, AGC ON), 0 Lux with IR
	Shutter Speed	1/25 s (1/30 s) to 1/50,000 s
	Day & Night	Auto Day & Night
	Angle Adjustment	Pan: -30° to 30°, Tilt: 0° to 75°, Rotate: -180° to 180°
Lens	Lens Type	2.8mm,3.6 mm
	Focal Length	Fixed focal lens, 2.8, 3.6 optional
	Focal Length & FOV	2.8mm: horizontal FOV 101°, vertical FOV 54°, diagonal FOV 120° 3.6mm: horizontal FOV 87°, vertical FOV 44°, diagonal FOV 104°
	Lens Mount	M12
Illuminator	IR Range	10 m to 20 m
Video	Frame Rate	1080P@25fps,1080P@30fps
Image	SNR	42 dB
Interface	Video Output	1-ch, Aviation Port
	Audio	Input: built-in Microphone Output: 1-ch, Aviation Port (Linear Level, 1KΩ)
General	Product Dimension	97 mm × 99.5 mm × 46.6 mm (3.8" × 3.9" × 1.8")
	Power Supply	DC 9V~16V
	Power Consumption	MAX. 4W
	Startup and Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensing)
	Weight	Approx. 300 g (0.66 lb.)

▪ Available Model

AE-VC211T-IRS(2.8mm)/新

▪ Dimension


Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



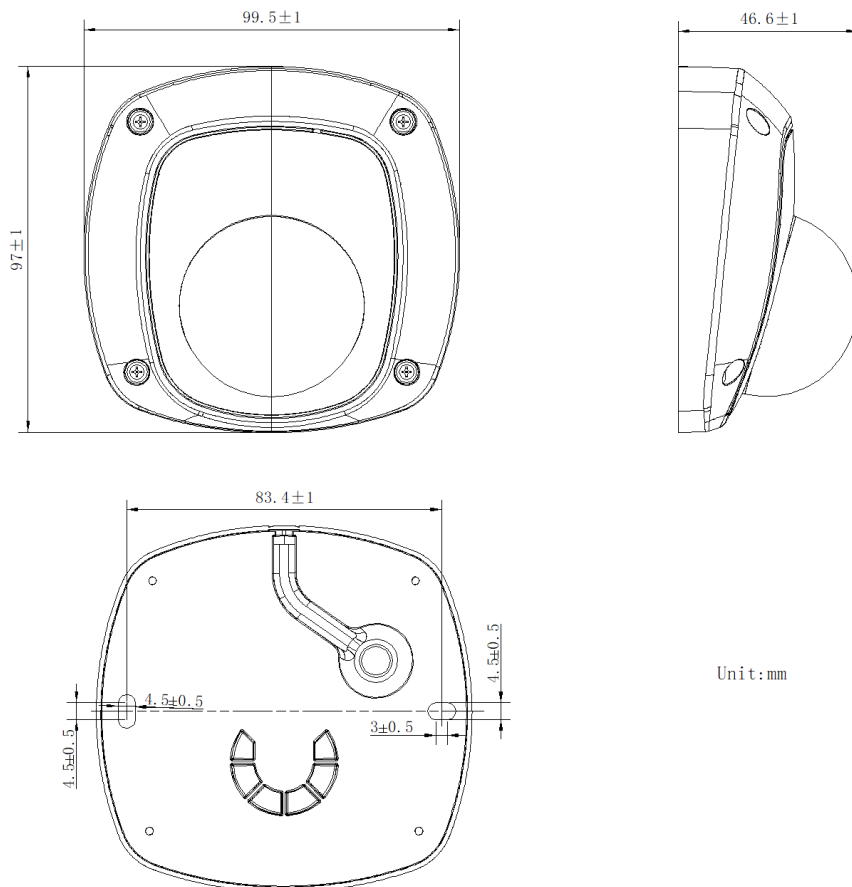

▪ **Accessory**

▪ **Included**

AE-VC111T-IRS
100万1/2.9" CMOS
红外点阵半球型模拟
摄像机



Headquarters

No.555 Qianmo Road, Binjiang District,
 Hangzhou 310051, China
 T +86-571-8807-5998
 www.hikvision.com

Follow us on social media to get the latest product and solution information.

