

DS-K1T804AEF-E Fingerprint Access Control Terminal



- Integrated management of access control and the attendance
- 2.4-inch LCD screen to display the time, the date and swiping/fingerprint authentication results and diagonal
- Transmission modes of wired network (TCP/IP) and wireless network
- Max. 3000 users, Max. 3000 fingerprints, Max. 3000 password, Max. 100,000 event records
- Different authentication types can be configured according to different situations, authentication via PIN code is also supported
- Stand-alone operation: locally adds person, card and fingerprints information
- Exports the presenting card data and the attendance report to the USB flash drive
- Up to 32 normal shifts, up to 32 man-hour shifts, and up to 32 attendance holiday schedules can be configured
- Generates the attendance report automatically
- EM card reading
- Secure door control unit accessing via RS-485 connection
- Supports fingerprint card reader (DS-K1201 series) accessing
- Tampering detection, unlocking overtime alarm, invalid card swiping over times alarm, duress card alarm, and so on
- Supports multiple languages: English, Vietnamese, Brazilian Portuguese, Spanish, French, Italian, Arabic, Thai, Turkish, Indonesian, and Ukrainian
- Accurate data and time display provided by built-in electronic clock
- Check the device running status via the Watchdog. When exception status occurs, the system will reboot Automatically
- Data can be permanently saved after power-off
- Supports transmitting data via Wi-Fi
- Operates via Hik-Connect mobile client
- Supports ISAPI protocol and ISUP 5.0 protocol






Specification

Linux
2.4-inch diagonal
320 × 240
LCD-TFT display screen
1 loudspeaker, 1 buzzer
1 loudspeaker, 1 buzzer
TCP/IP, 10/100Mbps, self-adaptive
Support
Support
1
1
1
1
1
1
1
1
1
1
1
3000
3000
3000
100,000
EM card
0 to 5 cm
< 0.5 s
Optical fingerprint module
1:1 and 1:N
< 0.5 s
≤ 0.001 %
≤ 0.01 %
Power/status (red/green)
12 VDC/1 A
-10 °C to +55 °C (14 °F to +131 °F)
10% to 90% (no condensing)
Black (included), gold (optional), silver (optional), white (optional)
205 mm × 76.5 mm × 37 mm (8.07" × 3.01" × 1.46")
Surface mounting

Dimension



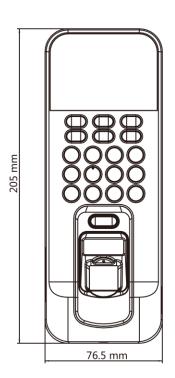



Available Model

DS-K1T804AEF-E

Distributed by

Γ



Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T+86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision Canada T +1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T +662-275-9949 sales.thailand@hikvision.com Hikvision Europe T+31-23-5542770 sales.eu@hikvision.com

Hikvision Brazil T +55 11 3318-0050

Hikvision Turkey T +90 (216)521 7070- 7074

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com

T +01628-902140

Hikvision South Africa

Tel: +27 (10) 0351172

Hikvision France T +33(0)1-85-330-450

info.fr@hikvision.com

Hikvision Kazakhstan

nikia.panfilov@hikvision.ru

T +7-727-9730667

sale.africa@hikvision.com

Hikvision UK & Ireland Hikvision UAE T +971-4-4432090 salesme@hikvision.com sales.uk@hikvision.com

> Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T+34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Latam.support@hikvision.com

sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413

© Hikvision Digital Technology Co., Ltd. 2020 | Data subject to change without notice |

sales.my@hikvision.com