

## DS-1100KI Network Keyboard



### Features and Functions

- 7" TFT touch screen at 800×480 resolution;
- 4-axis joystick;
- Live view and playback of video on screen at up to 1080P resolution;
- Compatible with NVR/DVR/DVS, matrix, network camera/dome, video wall controller, etc.
- Macro command operation;
- Display of decoded video on monitor or video wall;
- Shortcut keys for dome control, setting and calling of preset, patrol and pattern;
- Shortcut keys for playback operation;
- Shortcut keys for input group and output group;
- Shortcut keys for wiper and light control operation;
- 1-channel video decoding for local live view;
- Video capture and recording to local U-flash disk;
- Support 3 operators, and each user is allowed to operate 1280 devices;
- Support configuration by WEB server;
- Support configuration by the Keyboard Configuration Tool;
- Configuration and control of the MVC system;
- Support control of the analog matrix with the protocol of ZT-1.0, ZT-2.0, EXTRON or CREATOR;
- Control of up to 255 analog domes by RS-485 connection;
- Accessible by the platform software.




## Specifications

<b>Model</b>	<b>DS-1100KI</b>	
<b>Control Mode</b>	IP-based	
<b>TFT LCD Panel</b>	7" TFT LCD monitor with touch panel	
	Resolution: 800 × 480	
<b>Joystick</b>	4-axis joystick	
<b>Audio</b>	Line In	1-ch, 3.5 mm connector (2.0 Vp-p, 1 kΩ)
	Audio Out	1-ch, 3.5 mm connector (Linear, 560 Ω)
<b>External Interface</b>	Network Interface	1 10M/100M/1000M Ethernet interface
	RS-232 Interface	1 RS-232 interface
	RS-485 Interface	1 RS-485 interface
	USB Interface	1, USB2.0 (for data storage and device upgrade)
<b>General</b>	Power Supply	12 VDC
	Power Consumption	≤ 15W
	Working Temperature	-10°C to +55°C (14 °F to 131° F)
	Working Humidity	10% to 90%
	Dimensions (W × D × H)	435 × 193 × 110 mm (17.1" × 7.6" × 4.3")
	Weight	2 Kg (4.4 lb)


## Appearance

### Operation Panel

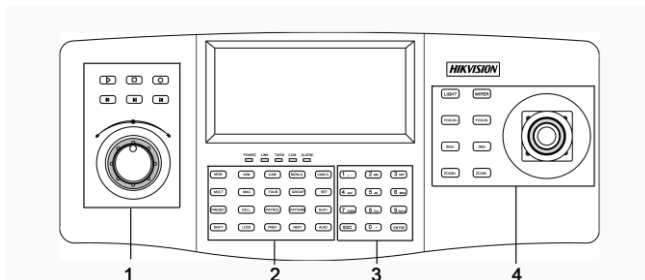

Index	Description	Index	Description
1	Record/Playback buttons	3	Numeric buttons
2	Functional buttons	4	PTZ control area

### Interfaces

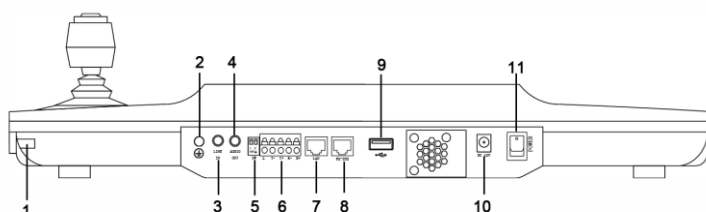

Index	Description	Index	Description
1	Touch pen	7	LAN
2	GND	8	RS-232 interface
3	Line in	9	USB interface
4	Audio out	10	12 VDC power supply
5	Reserved	11	Power on/off
6	RS-485 interface		

Distributed by

## Available Model

DS-1100KI

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Russia**  
T +7-495-669-67-99  
sateru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com