

■ Product Image

Color/Bracket/Lamp number in kind prevail.




■ Product Specification

Model	DS-TLSLD-LED100
Input Voltage	<input checked="" type="checkbox"/> AC 220 V <input type="checkbox"/> DC 24V
Input Current	≥0.48A
Rated Power	100W±10%
Power Factor	≥0.95
LED Brand	<input type="checkbox"/> Cree <input type="checkbox"/> Osram <input checked="" type="checkbox"/> Philips
Color Temperature	<input checked="" type="checkbox"/> 3000K <input checked="" type="checkbox"/> 4000K <input checked="" type="checkbox"/> 5000K <input checked="" type="checkbox"/> Others
Luminous Flux	≥11000lm
Color Rendering Index	70
Optics Angle	95*157
Control Mode	<input checked="" type="checkbox"/> Switch <input checked="" type="checkbox"/> Dimming <input type="checkbox"/> Others
Insulation Grade	<input checked="" type="checkbox"/> I <input type="checkbox"/> II <input type="checkbox"/> III
Luminous Adjustable Angle	<input checked="" type="checkbox"/> non-adjustable <input type="checkbox"/> adjustable
Power Installation Method	<input type="checkbox"/> Split <input checked="" type="checkbox"/> Integrated Internally <input type="checkbox"/> Integrated Externally
Lamp Installation Method	<input checked="" type="checkbox"/> Open <input type="checkbox"/> Buried <input type="checkbox"/> Embedded
Pole Specification	<input type="checkbox"/> Φ40 <input checked="" type="checkbox"/> Φ60 <input type="checkbox"/> Φ80
Lamp Material	Aluminum 6063+PC

Working Temperature	-20°C~+45°C
Working Humidity	0-90% RH
Level of protection (IP)	IP65
Executive Standard	GB7000.1-2015 GB7000.201-2008
Dimension(mm)	L557*W330*H107 mm
Weight	5.5 kg
Service Life (H)	≥30000

■ Outline Drawing

Unit: mm

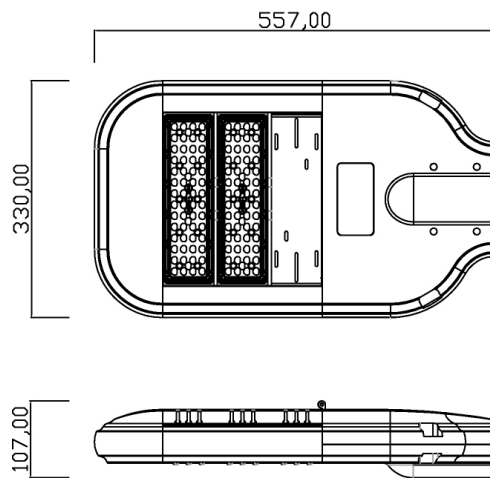

■ Packaging Drawing

Packag e	Dimension: 602*375*145 mm, AB Corrugated carton, Industrial packaging Number: 1PCS
---------------------	---