

DS-MH2311(C) (MD) Series Body Camera

Introduction

Body camera highly integrates with record, taping, capture, positioning, face recognition and comparison, etc. It can record the process and condition of events completely via record, taping, and capture. It satisfies the requirement of mobile duty and evidence record. It is widely applicable to public security protection, city management, industry and commerce, etc.



Key Feature

- 1080p HD recording.
- Max. 30 M (7296 × 4104) resolution of the captured picture.
- Transmits videos to central video platform via 4G wireless communication.
- Dual positioning modules of GPS and Beidou, uploading the location information to the center in real time.
- IR function to recognize the facial features in the captured picture even in dim environment.
- Waterproof and dustproof, applicable to all-day field work.
- 3G/4G/Wi-Fi network connection with flexible wireless transmission.
- Face detection, face picture capture, and upload.

Available Model

DS-MH2311/64G/GLE(C)(MD)



Specification


Model		DS-MH2311/64G/GLE(C)(MD)
Camera	Sensor Type	1/3" CMOS
	FOV	Horizontal: 134° Vertical: 75° Diagonal: 154°
Screen	Dimension	2.4" TFT LCD
	Resolution	240 × 320
	Touchscreen	Supported
Image	Shutter	Digital shutter
	Day & Night	IR cut filter with auto switch (You can see human face within 3 m at night.)
Video	Stream Type	Main stream, sub-stream
	Main Stream Resolution	1080P/30 fps, 1280 × 720/30 fps, 720 × 576/30 fps
	Sub-Stream Resolution	1080P/30 fps, 1280 × 720/30 fps, 720 × 576/30 fps
	Sub-Stream Frame Rate	30 fps, 15 fps, 5 fps
	Video Compression	H.264, H.265
	Frame Rate Type	Constant frame rate, variable frame rate
	Video Resolution	1080P/30 fps, 1280 × 720/30 fps, 720 × 576/30 fps
	Picture Resolution	5 M (3072 × 1728), 16 M (5312 × 2988), 30 M (7296 × 4104)
Audio	Picture Format	JPEG
	Audio Sampling Rate	16 kHz
	Audio Compression	G.711alaw, G.711ulaw, G.722.1, PCM
Smart Function	Audio Compression Frame Rate	8K, 16K
	Face Picture Capture	Face detection, face picture capture, and upload, Digital stabilization technology
Network Connection	Dial	Frequency band: LTE FDD: B1/B2/B3/B4/B5/B7/B8/B20/B28 LTE TDD: B38/B39/B40/B41 WCDMA: B1/B2/B4/B5/B8
	Wi-Fi	802.11 a/b/g/n/ac
	Wi-Fi Frequency Range	2.402 to 2.482 GHz, 5.180 to 5.825 GHz
	Positioning	GPS, Beidou, GPS + Beidou
	Bluetooth	BT 4.2
	Interface Protocol	EHome 2.0, Hikvision SDK

	Operating System	Android 9.0
	Memory	2 GB
	Laser Positioning	Supported
	Indicator	Charging indicator, working indicator
	Button	On/off, capture, record, tape, SOS, PTT
	Weight	190 g (without should clip) (0.4 lb)
	Dimension (L × W × H)	95 × 60 × 29 mm (3.7 × 2.4 × 1.1 inch)
	Power Supply	Battery
	Working Temperature	-20 °C to 55 °C (-4 °F to 131 °F)
	Working Humidity	≤ 90%
Light Supplement	IR	Supported
	White Light	Supported
Storage	Internal Storage Media	TF card
	Internal Storage Capacity	64 GB
Interface	Charging Interface	Mini USB 2.0
	MIC	Supported
	Speaker	Supported
	SIM Card Slot	MicroSIM
Battery	Dismountable Battery	Supported
	Battery Capacity	3,300 mAh
	Charging Time	≤ 4h
Approval	Protection	IP67: IEC 60529-2013, MIL STD 810G, Shock Resistance, AES 256.


Note:

- Battery life is affected by environment and device configuration. In general condition, the battery capacity will reduce after one-year usage.
- The device can record about 13/15 hours continuously in 1080p/720p resolution when 4G, Wi-Fi, GPS, and LCD are disabled.

Typical Application

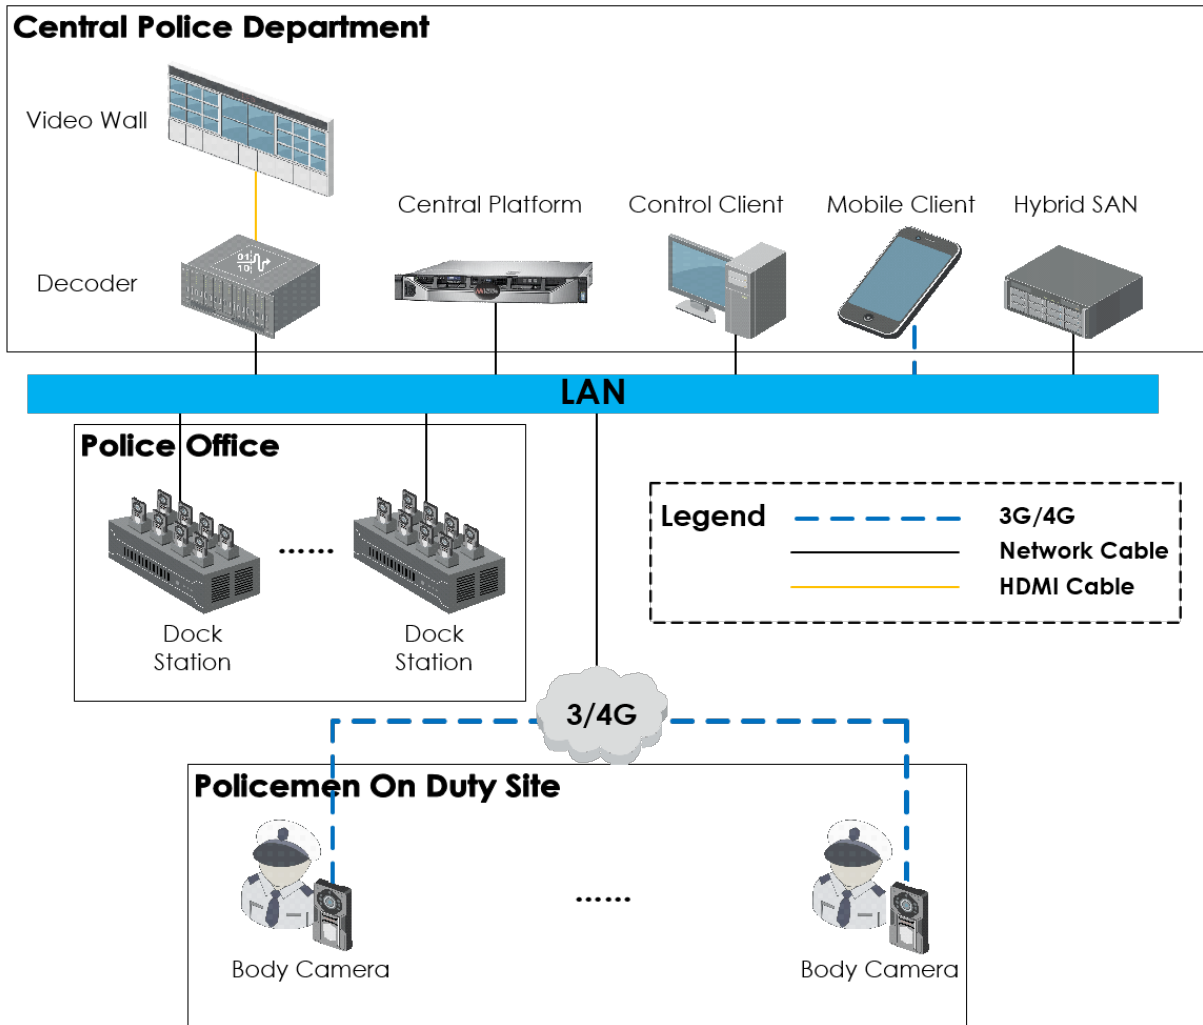

Dimension

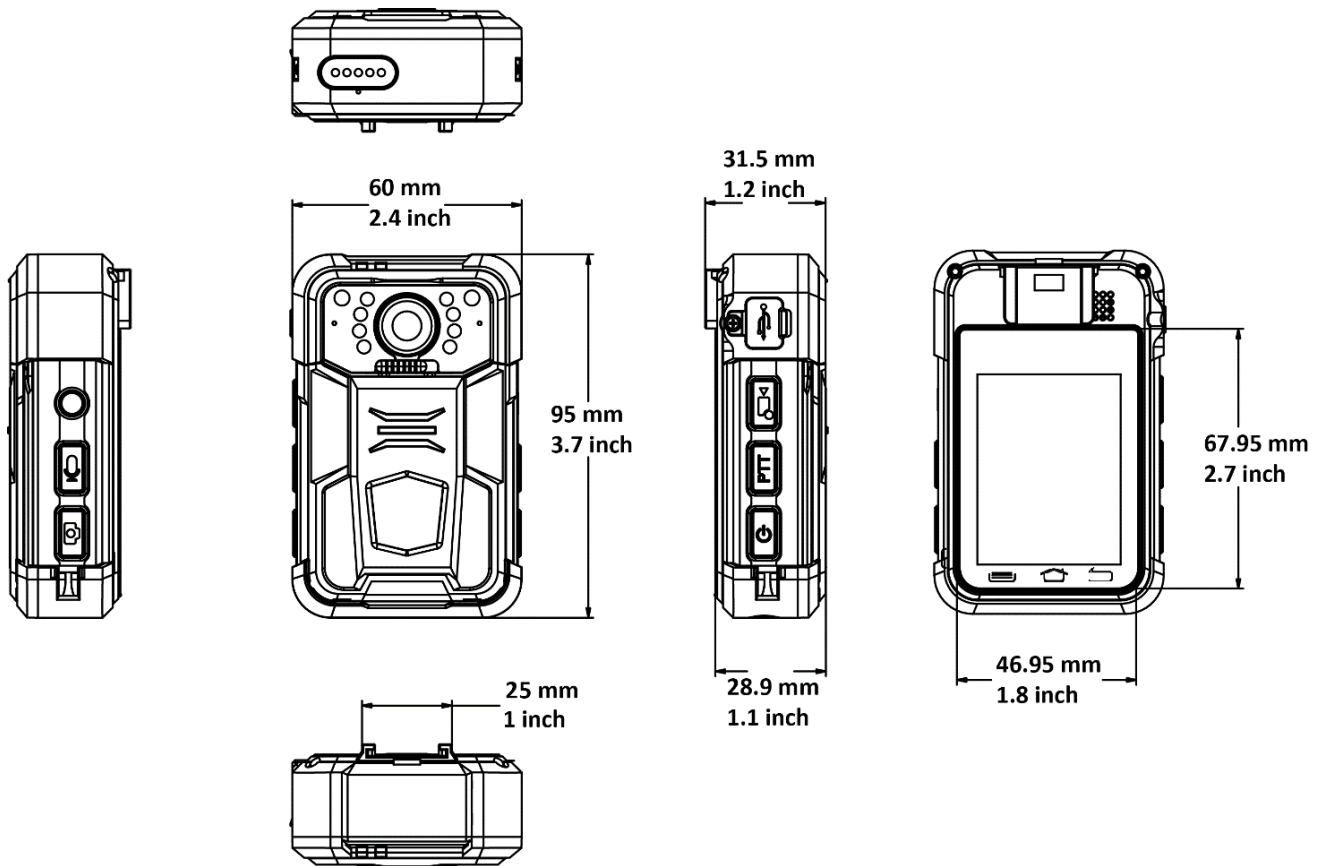

Distributed by



HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com