

## DS-UA14 4 MP Web Camera



- 4 MP CMOS
- High quality imaging with 2560 × 1440 resolution
- Min. illumination: 0.1 Lux @ (F1.2, AGC ON)
- Built-in microphone with clear sound
- AGC for self-adaptive brightness
- Built-in speaker supports echo suppression
- Type A interface, supporting USB 3.0 protocol.  
Plug-and-play, no need to install driver software



## ▪ Specification



Camera	
Image Sensor	4 MP CMOS
Signal System	PAL/NTSC
Resolution	2560 (H) × 1440 (V)
Frame Rate	MJPG: 2560 × 1440 @30/25 fps 1920 × 1080 @30/25 fps 1280 × 960 @30/25 fps 1280 × 720 @30/25 fps 640 × 480 @30/25 fps 640 × 360 @30/25 fps  YUV: 1920 × 1080 @5 fps 1280 × 960 @5 fps 1280 × 720 @10 fps 640 × 480 @30/25 fps 640 × 360 @30/25 fps  NV12: 1920 × 1080 @5 fps 1280 × 960 @10 fps 1280 × 720 @15 fps 640 × 480 @30/25 fps 640 × 360 @30/25 fps
Min. Illumination	0.1 Lux @ (F1.2, AGC ON)
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Lens	3.6 mm fixed focal lens
Field of View	horizontal FOV: 80°, vertical FOV: 50°, diagonal FOV: 88°
Lens Mount	M8
Day & Night	24/7 Color Imaging
Angle Adjustment	pan: 360°; tilt: -15° to 15°; rotation: 0°
Pickup Distance	3 m
Cable Length	1.5 m
Depth of Field	0.5 m to ∞
Speaker	
Speaker Range	0 m to 2 m
Image	
Wide Dynamic Range (WDR)	Digital WDR
Audio	
Audio Sampling Rate	Microphone: 16 kHz Speaker: 48 kHz
Interface	
Video Output	USB 3.0

Audio	Built-in speaker Built-in microphone
Operating System	Recommended systems Windows 7/8/10/11 (resolution higher than 1080P is only available in Windows 8.1 and above version) Android 8.1 and above version Linux 4.14 and above version macOS 10.12 and above version Chrome OS
<b>General</b>	
Operating Conditions	-10 °C to 45 °C, humidity: 90% or less (non-condensing)
Power Supply	5 VDC ± 5% (USB)
Consumption	Max. 2.5 W (Max. 4.5 W with speaker working)
Material	Plastic
Dimension	103 mm × 48.5 mm × 43.6 mm (4.05" × 1.91" × 1.72")
Weight	Approx. 113 g (0.25 lb.)
<b>Functions</b>	
Echo Cancellation	Yes
<b>Accessory</b>	
Packing List	Camera × 1 Quick Start Guide × 1

## ▪ Available Model

DS-UA14

## ▪ Dimension

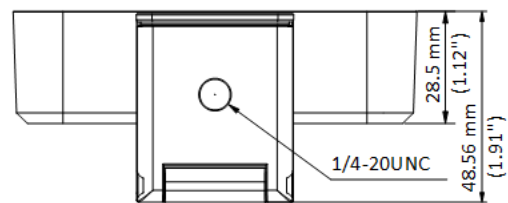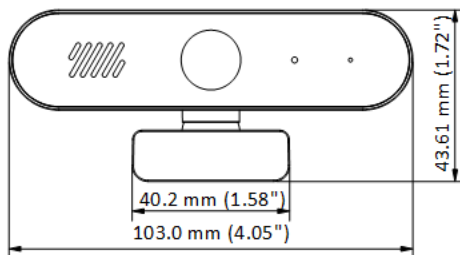

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com