

## DS-D5022F2-2V1

### 21.5 inch FHD Borderless Monitor



- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS FHD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

## ▪ Specification

	Model	DS-D5022F2-2V1
<b>Display</b>	Screen Size	21.45 inch
	Active Display Area	478.656 (H) mm × 260.280 (V) mm
	Resolution	1920 × 1080
	Backlight	E-LED
	Pixel Pitch	0.241 (H) mm × 0.241 (V) mm
	Brightness	250 cd/m <sup>2</sup>
	Viewing Angle	178° (H)/178° (V)
	Color Depth	8 bit, 16.7 M
	Contrast Ratio	3000:1
	Response Time	6.5 ms
	Refresh Rate	Max. 75 Hz, Typ. 60 Hz
	Haze	Haze 25%, 3H
	Reliability	7 × 16 H
	Color Gamut	72% NTSC
<b>Interface</b>	Video & Audio Input	HDMI 1.4 × 1, VGA × 1
<b>Power</b>	Power Supply	DC 12 V, 2.0 A
	Power Consumption	≤ 24 W
	Standby Consumption	≤ 0.5 W
<b>Working Environment</b>	Working Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Working Humidity	20% RH to 90% RH (Non-Condensing)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	10% RH to 90% RH (Non-Condensing)
<b>General</b>	Casing Material	Plastic
	VESA	75 mm × 75 mm (4 - M4 × 6 mm)
	Bezel Width	2.38 mm (top/left/right), 21.55 mm (bottom)
	Product Dimensions (W × H × D)	With base: 493.26 (W) mm × 367.02 (H) mm × 162.73(D) mm (19.42" × 14.45" × 6.41")
		Without base: 493.26 (W) mm × 290.13 (H) mm × 42.35 (D) mm (19.42" × 15.49" × 1.67")
	Package Dimensions (W × H × D)	599 (W) mm × 393 (H) mm × 109 (D) mm (23.58" × 15.47" × 4.29")
	Net Weight	2.0 ± 0.5 kg (4.41 ± 1.10 lb.)
	Gross Weight	3.2 ± 0.5 kg (7.05 ± 1.10 lb.)
	Packing List	Monitor × 1, Base component × 1, Power adapter (12 V, 2.0 A) × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1
Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information	

▪ **Physical Interface**


Interface	Description	Interface	Description
HDMI	HDMI 1.4 digital signal input interface	VGA	VGA analog signal input interface
DC	DC 12 V 2.0 A input interface		



▪ **Available Model**

DS-D5022F2-2V1

▪ **Dimension**

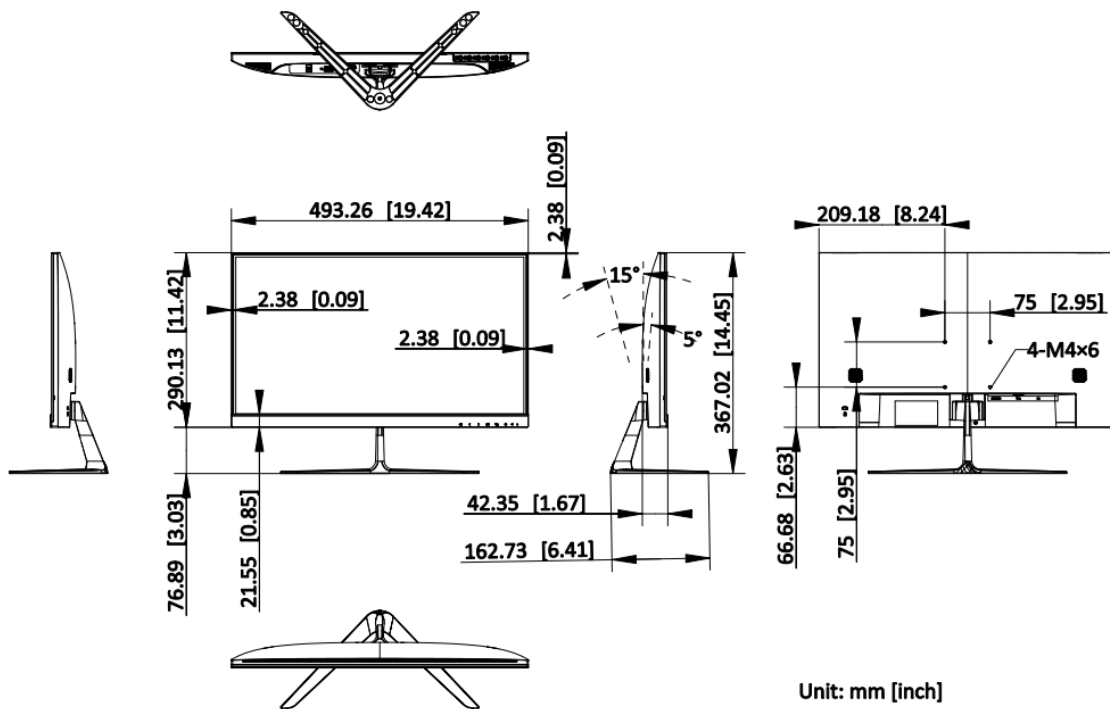

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

