

## DS-7716NI-M4/16P M Series 8K NVR

### Key Feature

- H.265+/H.265/H.264+/H.264 video formats
- Up to 16-ch IP camera inputs
- Up to 20-ch@4 MP decoding capacity
- Up to 256 Mbps incoming bandwidth



### Professional and Reliability

- H.265+ compression effectively reduces the storage space by up to 75%
- Dual-stream recording saves bandwidth
- Adopt stream over TLS encryption technology which provides more secure stream transmission service
- Support double verification for playback and downloading
- Solar-powered camera is connectable through OTAP protocol. NVR would get stream when user requests, and camera would send back videos according to the schedule

### HD Video Output

- Provide independent HDMI and VGA outputs
- HDMI video output at up to 8K resolution
- Dual 4K HDMI output resolution

### Storage and Playback

- Up to 4 SATA interfaces for HDD connection
- 16-ch synchronous playback

### Smart & POS Function

- Support multiple VCA (Video Content Analytics) events
- Configurable special camera smart functions, such as VCA detection (motion, line crossing, intrusion, etc.), heat map, ANPR, and people counting
- POS information overlay on live view and playback, and POS triggered recording and alarm

### Network & Ethernet Access


- 16 independent PoE network interfaces
- 1 self-adaptive 10/100/1000 Mbps Ethernet interface
- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Smooth streaming technology
- Support web access without plug-in

## ▪ Specification

| Video and Audio       |  |
|-----------------------|--|
| IP Video Input        | 16-ch<br>Up to 32 MP resolution<br>*: The NVR supports up to 8-ch 32 MP/24 MP IP video inputs.   |
| Incoming Bandwidth    | 256 Mbps   |
| Outgoing Bandwidth    | 256 Mbps   |
| HDMI 1 Output         | 8K (7680 × 4320)/30Hz, 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz |
| HDMI 2 Output         | 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz                        |
| VGA Output            | 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz   |
| Video Output Mode     | HDMI1/VGA simultaneous output, HDMI2/VGA independent output  |
| CVBS Output           | 1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480  |
| Audio Output          | 1-ch, RCA (Linear, 1 KΩ)   |
| Two-Way Audio         | 1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)  |
| Decoding              |  |
| Decoding Format       | H.265+/H.265/H.264+/H.264  |
| Recording Resolution  | 32 MP/24 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF<br>*: The NVR supports up to 8-ch 32 MP/24 MP IP video inputs.                              |
| Synchronous Playback  | 16-ch  |
| Decoding Capability   | 2-ch@32 MP (30 fps) + 2-ch@8 MP (30 fps)/10-ch@8 MP (30 fps)/20-ch@4 MP (30 fps)/40-ch@1080p (30 fps)  |
| Dual-Stream Recording | Support  |
| Stream Type           | Video, Video & Audio   |
| Audio Compression     | G.711ulaw/G.711alaw/G.722/G.726/AAC/MP2L2  |
| Network               |  |
| Remote Connection     | 128  |
| Network Protocol      | TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS   |
| Network Interface     | 1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface   |
| PoE                   |  |
| Interface             | 16, RJ-45 10/100 Mbps self-adaptive Ethernet interface   |


|                            |  |
|----------------------------|--|
| Power                      | ≤ 200 W  |
| Standard                   | IEEE 802.3 af/at   |
| <b>RAID</b>                |  |
| RAID Type                  | N/A  |
| <b>Auxiliary Interface</b> |  |
| eSATA                      | 1 eSATA interface  |
| SATA                       | 4 SATA interfaces  |
| Capacity                   | Up to 16 TB capacity for each disk   |
| Serial Interface           | 2 RS-485 (half-duplex), 1 RS-232   |
| Alarm In/Out               | 16/9   |
| USB Interface              | Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0  |
| Ctrl 12V                   | Controllable 12 VDC, 1 A power output for external alarm device; The power will be turned on when the alarm output is triggered.<br>*: The Ctrl 12V power is controlled by alarm output 9. |
| DC 12V                     | 12 VDC, 1 A power output   |
| <b>General</b>             |  |
| Power Supply               | 100 to 240 VAC, 50 to 60 Hz  |
| Consumption                | ≤ 15 W (without HDD and PoE off)   |
| Working Temperature        | -10 °C to 55 °C (14 °F to 131 °F)  |
| Working Humidity           | 10% to 90%   |
| Chassis                    | 19-inch rack-mounted 1.5U chassis  |
| Dimension (W × D × H)      | 445 × 400 × 75 mm ( 17.5"× 15.7" × 3.0")   |
| Weight                     | ≤ 5 kg (without HDD, 11 lb.)   |
| <b>Certification</b>       |  |
| FCC                        | Part 15 Subpart B, ANSI C63.4-2014   |
| CE                         | EN 55032:2015+A1:2020, EN IEC61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019, EN 50130-4:2011+A1:2014, EN 55035:2017+A11:2020  |

## Dimension

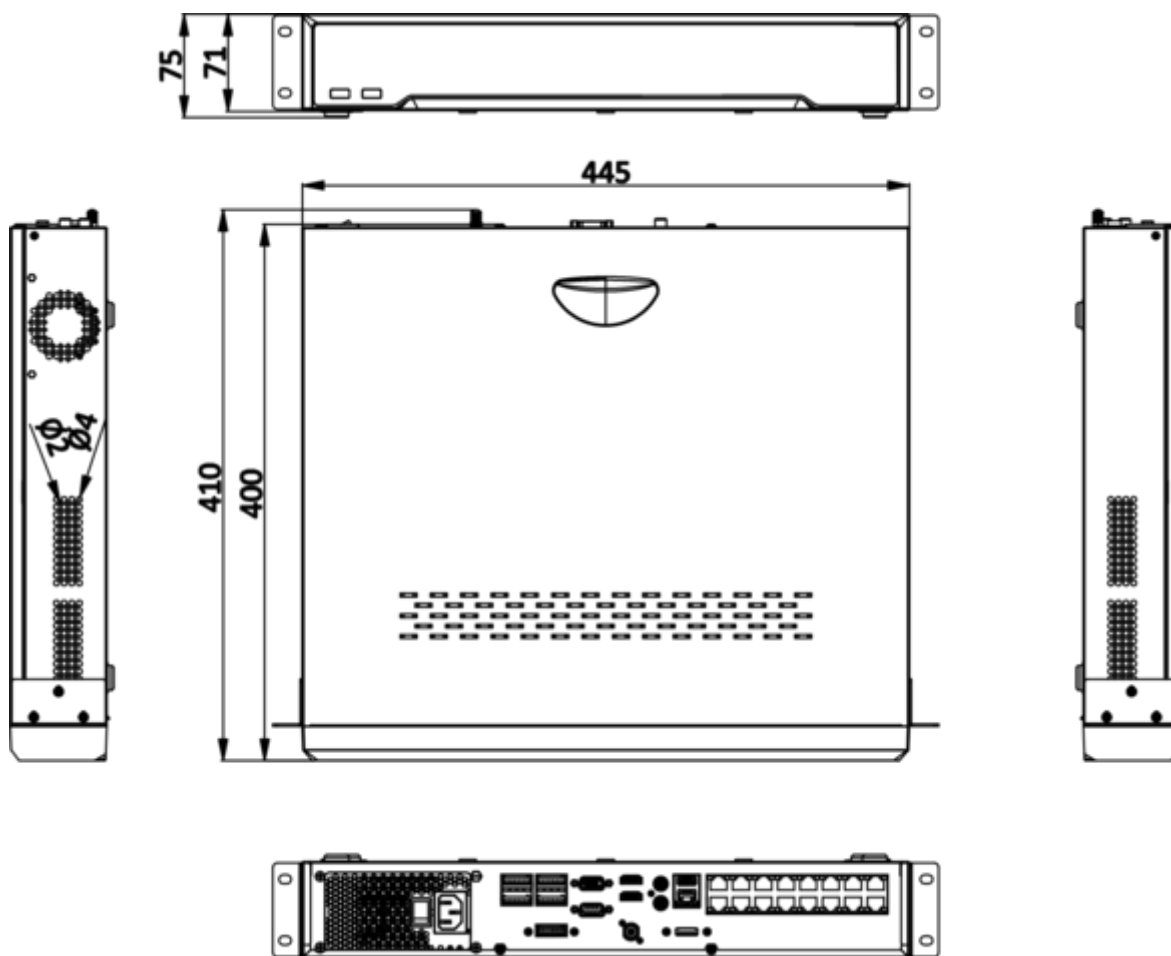

scale/1:1;Unit/mm

## Physical Interface

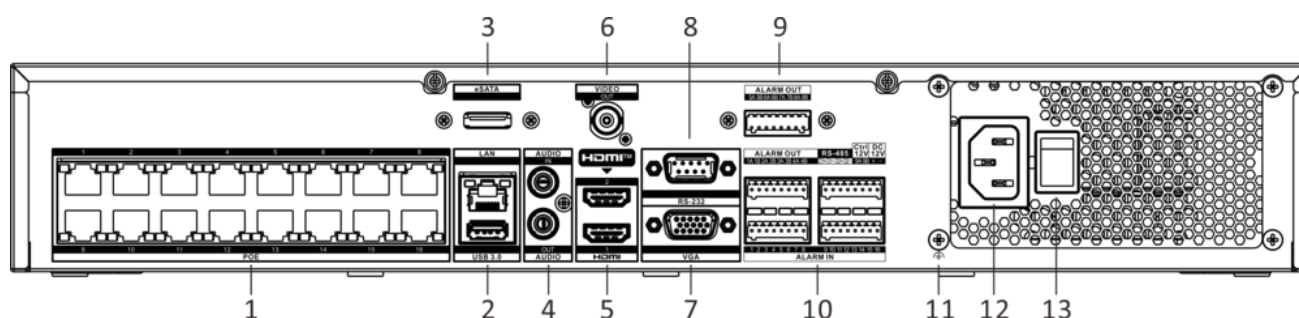

| No. | Description                          | No. | Description                                      |
|-----|--------------------------------------|-----|--|
| 1   | Network interfaces with PoE function | 8   | RS-232 serial interface                          |
| 2   | USB 3.0 interface and LAN interface  | 9   | Alarm out  |
| 3   | eSATA interface                      | 10  | Alarm in, alarm out, RS-485, Ctrl 12V and DC 12V |
| 4   | Audio in and audio out               | 11  | GND  |
| 5   | HDMI 1 and HDMI 2 interfaces         | 12  | 100 to 240 VAC power supply                      |
| 6   | CVBS video output                    | 13  | Power switch                                     |
| 7   | VGA output                           |     |  |

## Available Model

DS-7716NI-M4/16P

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq

