

HIKVISION COMMERCIAL DISPLAYS

Content

LCD Video Walls



LED Video Walls



Digital Signage



Smart Interactive Screens





01 LCD Video Walls



■ Tiny Bezel Screen Splicing

Choose from a wide range of ultra-thin bezel splicing LCD screens to meet a multitude of requirements and needs.

■ Best Chip, Best Panel, Best Display

Enjoy lossless signal transmission, more extensive color gamut coverage, and abundant colors with the advanced M182 chips and 10-bit processing.









1.7/1.8 mm

3.5 mm

5.3 mm

■ Uniform Color and Brightness

Ultra-uniform color and brightness imaging using dynamic self-adapting Noise Reduction, Edge Processing, and Cross Color Suppression.





■ Industrial Grade Hardware Design

Guard against interference from radiation, magnetic fields, and strong electric fields with metal housing design using Hikvision patented 2 mm carbon sheet metal and electrostatic spray.







Anti-Electromagnrtic Radiation

Internal Electromagnrtic Signal

Product List



Size: 46"

Resolution: 1920 ×1080,
Bezel width: 1.7 \ 3.5 \ 5.3 mm
Brightness: 500, 700 cd/m²
Contrast: 4000:1
Display color: 16.7 M (8-bit)
Designed for 24/7 Operation

Size: 49"

Resolution: 1920 ×1080
Bezel width: 3.5 mm
Brightness: 500 cd/m²
Contrast: 4000:1
Display color: 16.7 M (8-bit)
Designed for 24/7 Operation



Size: 55"

Resolution: 1920×1080 Bezel width: $1.8 \setminus 3.5 \setminus 5.5$ mm Brightness: 500, 700, 800 cd/m² Contrast: 4000:1


Display color: 16.7 M (8-bit) Designed for 24/7 Operation

02 LED Video Walls



■ High Reliability Component

A black grid mask eliminates spatial effect, increases contrast, and improves color rendition, and the gold cable provides impeccable quality and reliability.



■ Pixel Venus Technology

Increased image quality with enhanced details by Pixel Venus technology.





■ Wide Viewing Angle and Anti-Glare

Amazing wide-angle display up to 170° view. The self-lighting source helps to reduce glare and improve vision.



■ Long Life and Environment Friendly

Manufactured under industry-leading quality control, the dual-power LED video wall has longer life, lower noise pollution, and less power consumption, making it environment friendly and perfect for 24/7 operation.



Product List



Indoor Seamless LED display

Service life: > 100,000 hours

Pixel pitch: 1.27, 1.588, 1.906, 2.54, 3, 4 mm Brightness: \geq 800 cd/m² Color temperature: 3,000 -10,000 (Adjustable) Viewing angle: 160° Horizontal and Vertical Contrast: \geq 6,000:1



Outdoor Seamless LED display

Pixel pitch: 4, 5, 6.67, 8, 10, 16 mm Brightness: ≥ 5,500 cd/m²

Viewing angle: 120° Horizontal and Vertical

Refresh Rate: \geq 1,200 Hz Service life: > 100,000 hours Waterproof level: IP65

03 Digital Signage



Personalized Layout with Multiple Content Blocks

Personalize your own layouts to display various media formats. Factory-loaded Hikvision app can display multimedia easily.



■ Flexible and Secure User Management

Manage user privileges flexibly so only authorized users can push content to the screens.



Professional Design and Excellent Quality

Industry-leading quality control, tempering glass, 24/7 operation.



■ Fast Content Distribution

Linux-based central management software allows fast access of distributed content from anywhere via client software or web browser.



Product List



Wall-mounted digital signage

Size: 32", 43", 55"
Resolution: 1920×1080
Android, 1 GB RAM, built-in 32 GB SD Card
VGA / HDMI / USB / RJ45 / Wi-Fi, 3 / 46 (Optional)
Designed for 24/7 Operation
Portrait and landscape
Metal frame, tempered glass



Floor-standing digital signage

Size: 49", 55"
Resolution: 1920×1080
Android, 1 GB RAM, built-in 32 GB SD Card
VGA / HDMI / USB / RJ45 / Wi-Fi, 3 / 4G (Optional)
Designed for 24/7 Operation
Metal frame, tempered glass

Floor-standing touch digital signage

Size: 43"
Resolution: 1920×1080
Android, 1 GB RAM, built-in 32 GB SD Card
VGA / HDMI / USB / RJ45 / Wi-Fi, 3 / 4G (Optional)
Designed for 24/7 Operation
Metal frame, tempered glass
Touch parameters: IR screen, 10-point touch

OZ Smart Interactive Screens



All-in-One Design, Efficient Information Transfer

Information display, interaction, storage, and annotation can all be done in one device.



■ 10-Point IR Touch

Industry-leading 10-point infrared touch technology supports multi-point touch writing at the same time, rapid response, and fluency writing.




Multiple Terminal Interaction & Annotation

HIK-ScreenLink App controls and annotates the display from a mobile device through Wi-Fi connection, and all devices share the same display and annotation.



Industrial Screen Protection

All screens are equipped with tempered glass to ensure superb product safety.



Product List



Size: 65" 70" 75" 86"

Resolution: 1920 × 1080 (65" / 70"), 3840 × 2160 (75" / 86")
Brightness: 2 500 cd / m²
Viewing Angle: 178° Horizontal and Vertical
Operation System: Android & Windows Dual system
Touch mode: Optical IR Touch, 10-point touch
Minimum touch object diameter: > 3 mm non-transparent object
Positioning accuracy: ± 2 mm
Installation: Wall mount, mobile installation
OPS: Optional



OPS Model: DS-D50S5/8S


CPU: I5 processor Frequency: 3.3GHz Memory: 8 GB Hard drive: 128 GB (solid)

Hard drive: 128 68 (Solid)


Wireless: 802.11a/b/g/n, 3T3R MIMO Wi-Fi USB: 2 x USB 3.0, 2 x USB 2.0, 1 x HDMI

Interface: Audio, HDMI, Speaker, RJ45, Wi-Fi Antenna



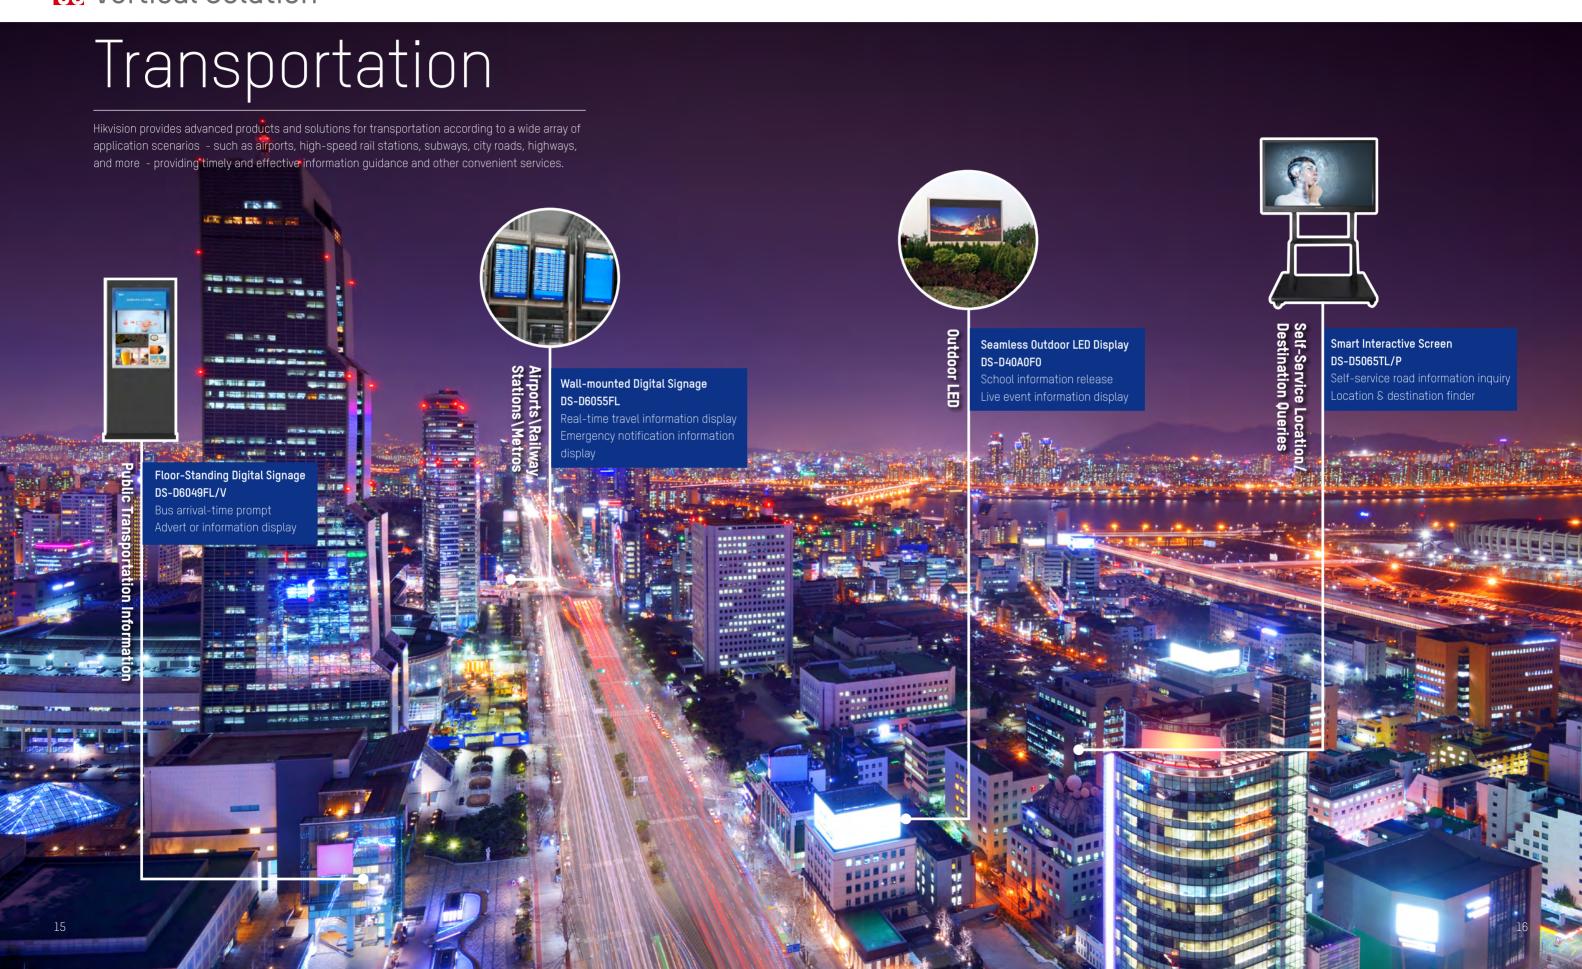



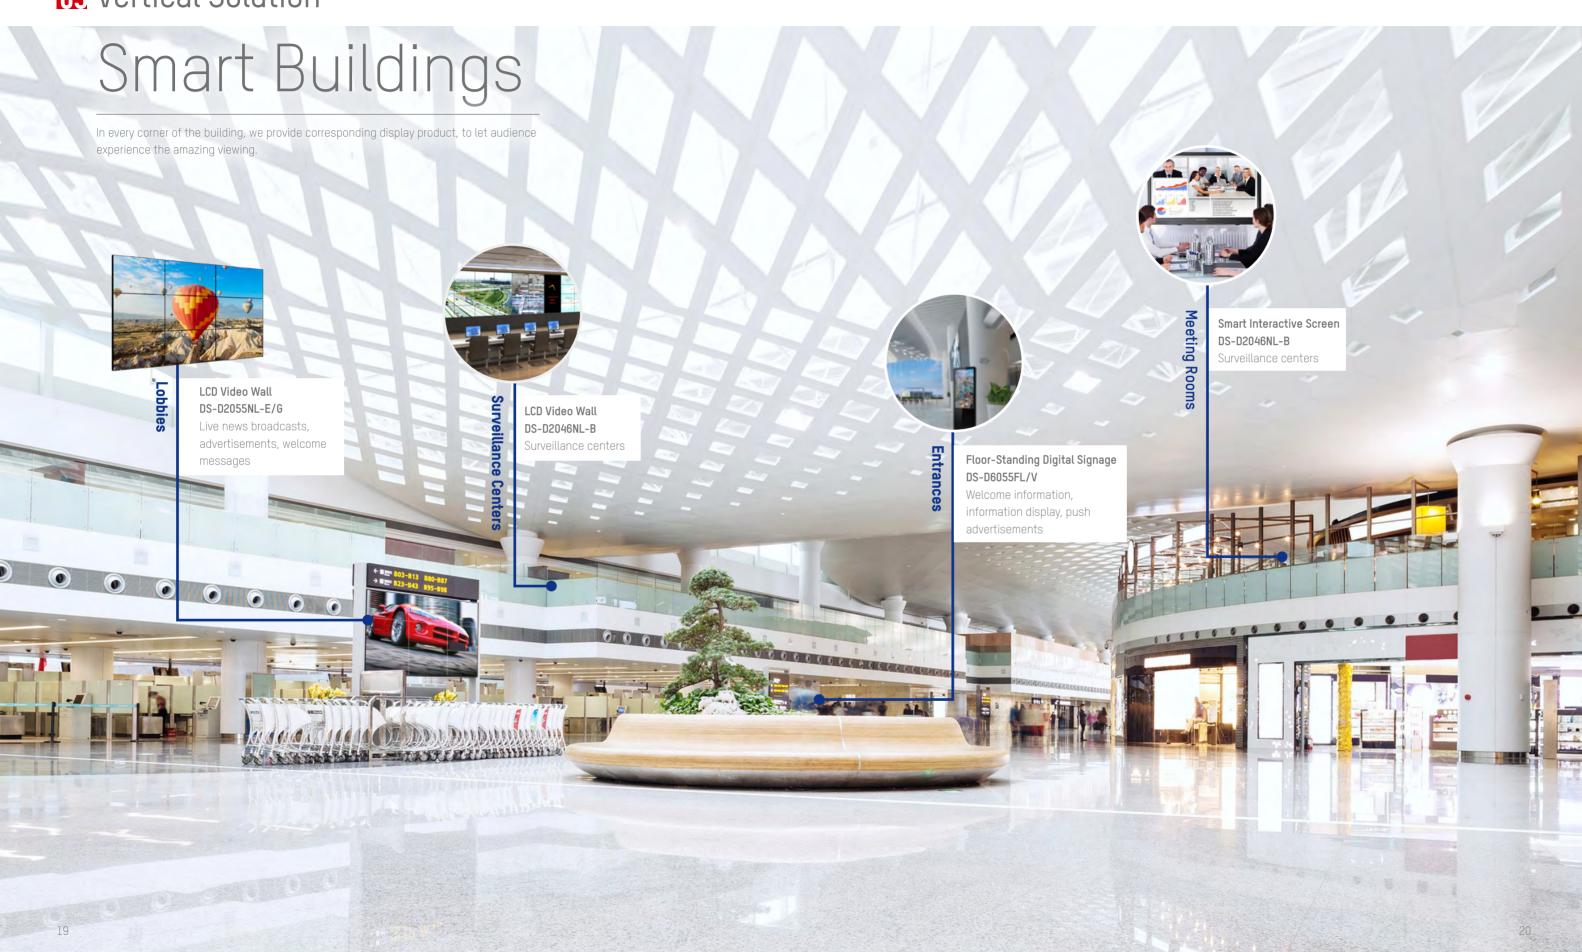





HIKVISION COMMERCIAL DISPLAYS

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA

T +1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia

T+61-2-8599-4233 salesau@hikvision.com

Hikvision Hong Kong

info.hk@hikvision.com

Hikvision Poland

T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia

Sales.Indonesia@hikvision.com

Hikvision Europe

T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision India

T +91-22-28469900 sales@pramahikvision.com

Hikvision Canada

T +1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand

sales.thailand@hikvision.com

Hikvision UK & Ireland

T+01628-902140 sales.uk@hikvision.com

Hikvision South Africa

Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision Brazil

T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Colombia

sales.colombia@hikvision.com

Hikvision UAE

T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718

sg@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667

nikia.panfilov@hikvision.ru

Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea

T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Spain

T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent

T +99-87-1238-9438 uzb@hikvision.ru

Follow us on social media to get the latest product and solution information





HikvisionHQ



HikvisionHQ



Hikvision Corporate Channel Hikvision_Global



(i) hikvisionhq