



03 Body Worn Camera

05 Dock Station

06 Portable PTZ Dome Camera



Hikvision's Portable Enforcement System mainly features body worn cameras, portable PTZ dome cameras, and helmet cameras. The body worn cameras are tailored for law enforcement and security personnel for the rigors of duty, integrating photo, video, and audio recording, 3G and 4G wireless transmission, GPS positioning, and centralized management in a compact, handy and sturdy design. The body worn cameras make great assistants in the field with reliable performance on the go and convenient charging and data transmission via dock station. The portable PTZ dome camera provides critical views on the street and around the city to secure the scene. Law enforcement personnel can choose face capture or ANPR mode to make temporary monitoring more intelligent. A helmet camera is small, light, and very convenient to carry, allowing users to record video exactly from their point of view while keeping their hands free.






Body Worn Camera

Body Worn Cameras capture video, audio and images on the move. It records video at resolution up to 1080p at 25 or 30 frames per second, keeping vital metadata such as date, time, GPS location, device number and user details for evidential purpose.

- > H.264 and H.265 video encoding
- > Up to 1080p @ 30 fps resolutions
- > Built-in GPS module
- > 3G/4G network transmission (optional)
- > Wi-Fi 802.11b/g/n

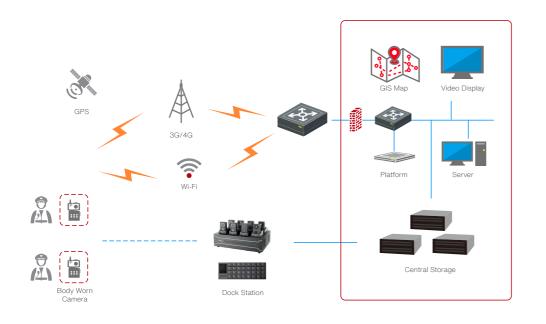

Body Worn Camera

Model	DS-MCW405	DS-MCW407
Image	CHOIL COLOR	HOT
System	Linux	Linux
Video Compression	H.264/H.265	H.264/H.265
Video	1080p/25 fps, 720p/25 fps	1080p/25 fps, 720p/25 fps
Picture	N/A	5M,16M,30M,40M
Display	No Screen	2.0" TFT LCD
IR Illuminators	Support	Support
Wireless Transmission	Not support	FDD LTE: Band 1, Band 2, Band 3, Band 4, Band 5, Band 7, Band 8, Band 20 WCDM4/HSDPA/HSUPA/HSPA+: Band 1, Band 2, Band 5, Band 8
Wi-Fi	802.11 b/g/n	802.11b/g/n
Positioning	Built-in GPS module	Built-in GPS module
Protection Level	IP67	IP67
On-board Storage	32GB	32G (up to 256G)
Battery	A battery with 2,800 mAh capacity which can record videos up to 12 hours in 720p resolution and 10 hours in 1080p resolution	A battery with 3,220mAh capacity which can record videos up to 12 hours in 720p resolution and 11 hours in 1080p resolution
Dimensions	75 × 55 × 24 mm (3.0 × 2.2 × 0.9 inch)	82.6 × 58 × 29 mm (3.7 × 2.4 × 1.1 inch)

Dock Station

Apart from charging the Body Worn Cameras, Dock Stations also provide a simplified way to access and back up the law-enforcement data.

- > Simultaneous charging and video backup from body worn cameras
- > Large local storage (optional)



Dock Station

Model	DS-MDS001	DS-MDS003
lmage	NEW	CHOT
Operation System	Linux	Embedded operation system & Android system
Body Camera Connection Port	Bottom contact port	USB data cables
Number of Body Cameras Cradle	8	8/16/24/32
Power	Max. 250 W	Max. 500 W
Storage	Max. 8 TB for oner each HDD	Max. 8 TB for oner each HDD
USB Interface	1 × USB 3.0	1 × USB 2.0, 1 × USB 3.0
Network Interface	2 × 10M/100M/1000M Ethernet interface	Gigabit network cable is used for local network
Loudspeaker	1	1
Product Dimension	400mm × 300mm × 110mm(15.7× 11.8 × 4.3 inch)	635mm × 604.6mm × 108.7mm [25 × 23.8 × 4.3 inch]




Portable PTZ Dome Camera

A portable PTZ dome developed for mobile enforcement scenarios, providing a mobile view around the city and securing critical borders.

Law enforcement personnel can choose from face capture or automatic number plate recognition (ANPR) mode to make temporary monitoring more intelligent.

- > Deep learning face capture / Deep learning ANPR
- > 4G (FDD-LTE) / 3G (WCDMA)
- > H.264 / H.265
- > 2 MP / 1080p
- > GPS
- > Replaceable power supply module
- > Up to 9 hours of continuous operation
- > IP66

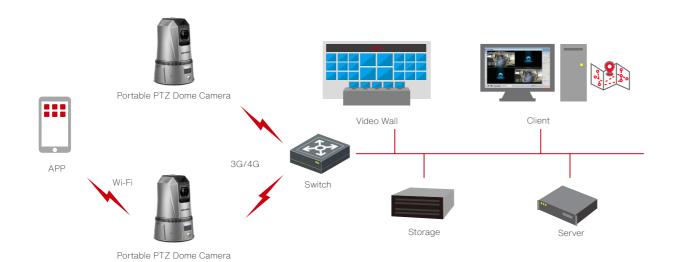







Fast Magnetic Mounting



Customized Vehicle Bracket

Portable PTZ Dome Camera

Model	iDS-MCD202-B
lmage	Deep Learning
Video Compression	H.265/MJPEG/H.264
Video	50 Hz: 25 fps (1920 *1080, 1280 *720) 60 Hz: 30 fps (1920 *1080, 1280 *720)
Zoom	30× optical zoom, 16× digital zoom
PTZ	Movement Range (Pan) 360° endless Movement Range (Tilt) -20° to 90° (Auto-flip)
IR Distance	Up to 100 m
External Interface	Network interface; Bluetooth and power interface
Wireless Transmission	FDD LTE: Band 1, Band 3, Band 7, Band 8, Band 20 WCDMA/HSDPA/HSUPA/ HSPA+: Band 1, Band 8 GSM/GPRS/EDGE: 900 MHz/1800 MHz 802.11 b/g/n/ac, 2.4 GHz/5.8 GHz, supporting Wi-Fi AP remote live view
Speaker and Microphone	Built-in
LED Screen	Built-in
Positioning	GPS
Protection Level	IP66 standard; TVS 4000V lightning protection, surge protection and voltage transient protection
On-board Storage	Built-in dual TF card slots, up to 256 GB for each TF card
Battery	Pluggable battery for continuous work, up to 9 hours
Intelligent Function	LPR/Face Capture (one of algorithms can operate at a time)

H2 2021



Hikvision UK & Ireland

Tel: +44(0)1628 902 140 presales.uk@hikvision.com

hikvision.com/uk