



# ColorVu G2

**Illuminating Darkness with  
24/7 Vivid Full Color Imaging  
for Enhanced Safety and  
Reduced Risk**

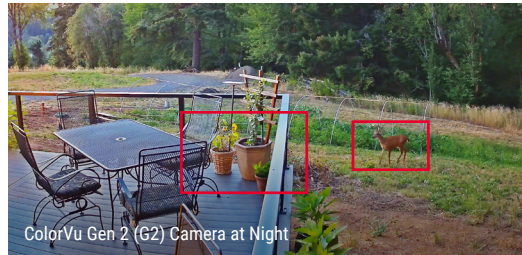

## 2nd Generation (G2) ColorVu Cameras

Hikvision ColorVu G2 cameras deliver the crisp, full color images and video around the clock you expect with ColorVu technology. Plus, the 2nd generation models are equipped with AcuSense features to provide full color 24/7 paired with more accurate detection of humans and vehicles to reduce false alarms.

ColorVu technology showcases images in full color without the need for additional configuration or added devices, even in total darkness. Its larger image sensor and low lux capacity capture brilliant details and clarity that boost safety by illuminating poorly-lit areas where crime or theft could occur. ColorVu G2 cameras are simple to deploy and offer distinctive, detailed images that surpass expectations.



# ColorVu G2 Featuring the AcuSense Algorithm: 2 Features, 1 Camera!



ColorVu Generation 2 (G2) camera models feature an enhanced ColorVu algorithm for full color images in darkness.

G2 ColorVu cameras are equipped with our 2nd Generation AcuSense algorithm for precise human and vehicle filtering that reduces false alarms up to 90 percent, improving productivity and alarm handling efficiency.

G2 models use false alarm filtering to sort out non-human and vehicle events, making it easier and more cost-efficient to find specific targets when searching video footage.

## ColorVu G2 Product Showcase

FIXED TURRET	FIXED DOME	DOME VARIFOCAL	BULLET VARIFOCAL
			
<b>DS-2CD2347G2-LU</b>	<b>DS-2CD2147G2-SU</b> *No Supplemental Light	<b>DS-2CD2747G2-LZS</b>	<b>DS-2CD2647G2-LZS</b>
Available in 2.8mm & 4mm Lens	Available in 2.8mm & 4mm Lens	3.6 - 9mm Varifocal Lens	3.6 - 9mm Varifocal Lens
2688 x 1520, 30FPS	2688 x 1520, 30FPS	2688 x 1520, 30FPS	2688 x 1520, 30FPS
1/1.8" Image Sensor	1/1.8" Image Sensor	1/1.8" Image Sensor	1/1.8" Image Sensor
0.0005 Lux	0.0005 Lux	0.0005 Lux	0.0005 Lux
F1.0 Aperture	F1.0 Aperture	F1.0 Aperture	F1.0 Aperture
130dB True WDR	130dB True WDR	130dB True WDR	130dB True WDR
Built-in Microphone	Built-in Microphone	--	--
--	Audio In and Out	Audio In and Out	Audio In and Out

FIXED BULLET	FIXED LONG BULLET
	
<b>DS-2CD2047G2-LU</b>	<b>DS-2CD2087G2-L</b>
Available in 2.8mm 4mm & 6mm Lens	Available in 2.8mm & 4mm Lens
2688 x 1520, 30FPS	3840 x 2160, 24FPS
1/1.8" Image Sensor	1/1.8" Image Sensor
0.0005 Lux	0.0005 Lux
F1.0 Aperture	F1.0 Aperture
130dB True WDR	130dB True WDR
Built-in Microphone	--