



## DS-7204HVI-ST/L Standalone DVR

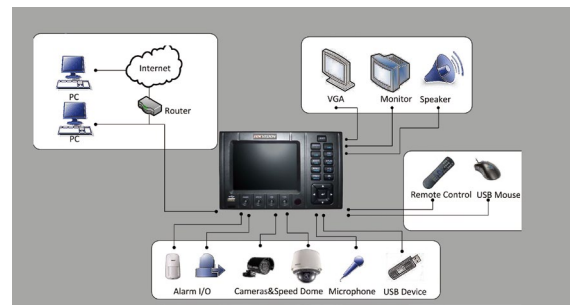

### Key features

- H.264 video compression
- Up to 4CIF resolution recording
- VGA output at up to 1280×1024 resolution
- Dual-stream
- 4-ch synchronous playback
- SMTP, NTP, SADP (IP Finder), DHCP protocols
- 5 inch LCD display

### Rear Panel of DS-7204HVI-ST/L

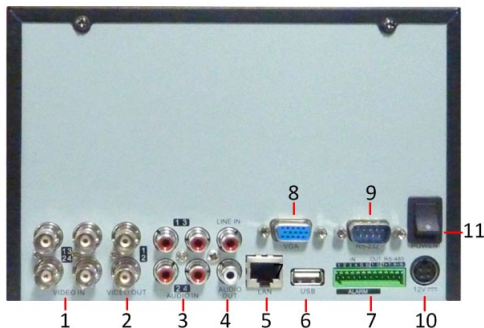

- 01, Video in
- 02, Video out
- 03, Audio in
- 04, Line in, audio out
- 05, LAN
- 06, USB interface
- 07, RS-485 interface, alarm in, alarm out
- 08, VGA interface
- 09, RS-232 serial interface
- 10, 12 VDC power supply interface
- 11, Power switch

### Specifications

DS-7204HVI-ST/L	
<b>Video / Audio input</b>	
Video compression	H.264
Analog video input	4-ch, BNC connector (1.0 Vp-p, 75 Ω); PAL / NTSC self-adaptive
Audio compression	G.711
Audio input	4-ch, RCA connector (2.0 Vp-p, 1 kΩ)
<b>Video / Audio output</b>	
VGA output	1-ch, resolution: 1280 × 1024 / 60 Hz
CVBS output	2-ch, BNC connector (1.0 Vp-p, 75 Ω); Resolution: PAL: 704 × 576, NTSC: 704 × 480
Audio output	1-ch, RCA connector (linear, 1 kΩ)
Recording resolution	4CIF / 2CIF / CIF
Frame rate	Main stream: 4CIF / 2CIF@ 12 fps, CIF@25 fps (P) / 30 fps (N) Sub stream: CIF / QCIF@ up to 25 fps (P) / 30 fps (N)
Video bit rate	32 kbps ~ 2048 kbps, or user defined (max. 3072 kbps)
Stream type	Video, Video & Audio
Audio bit rate	64 kbps
Dual-stream	Support
Synchronous playback	4-ch
Voice talk input	1-ch RCA (2.0 Vp-p, 1 kΩ)
<b>Hard disk</b>	
SATA	1 SATA interface
Capacity	Up to 2TB capacity
<b>External interface</b>	
Network interface	1, RJ45 10 M / 100 M self-adaptive ethernet interface
Serial interface	1 RS-485 interface, 1 RS-232 interface
USB interface	2, USB 2.0
Alarm in	4
Alarm out	1
<b>General</b>	
Power supply	12 VDC
Consumption	≤ 10W (without hard disk or DVD-R/W)
Working temperature	-10 °C ~ +55 °C
Working humidity	10% ~ 90%
Chassis	Chassis for ATM DVR
Dimensions (W x D x H)	180 × 280 × 180 mm
Weight	≤ 5kg (without hard disk or DVD-R/W)