
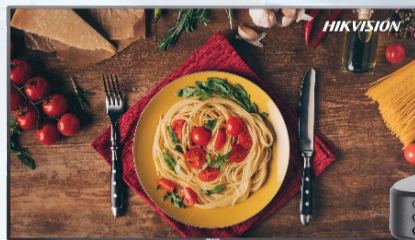


HIKVISION[®]

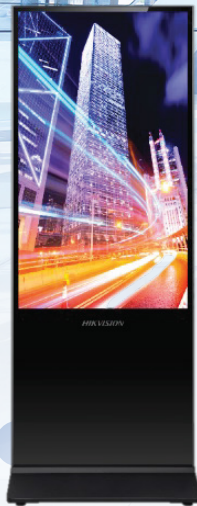

Hikvision Digital Signage Solution


Product Forms

- **3 product forms** available, suitable for different application scenarios.
- **1 platform** to remotely manage devices, edit programs, configure program schedules, and eventually release them to the terminals.

Wall-mounted bracket is already included in the package!



Wall-mounted Series



Floor-standing Series



Digital Signage Box

&



HikCentral FocSign

4K

4K Ultra HD

4K resolution to display extremely clear image and video.



Long Service Life

24 x 7 using, stable and reliable.



Wide Viewing Angle

178° horizontal and vertical wide viewing angle.



Video Input Interface

HDMI input interfaces allow device to work as normal display when needed.



3rd Party Display Compatible

Digital signage box can work with users' existing display equipment.



Onboard CCTV Decoding

Support onboard 1-ch 4K or below CCTV decoding.

HikCentral FocSign Overview

HikCentral FocSign is a platform to remotely manage digital signage devices (**Max. 1,024 pcs**), edit programs, configure program schedules, and eventually release them to the terminals.

✓ Free for 30 channels

✓ Support 29 languages

✓ Support ISUP

Key Functions & Features



Remote Device Management



Rich Materials Types



Powerful Programs Editing



Flexible Schedules Setting



Supervisor Approval



HikCentral FocSign

Network




Wall-mounted



Catering



Floor-standing



Supermarke



Digital Signage Box



Clothing Stores

Hikvision Digital Signage Solutions



Network



Advertising



Design and display creative advertisements

Digital Signage Box

- Compatible with All Types of Display Devices



Display Screen

- Asynchronous Display by HikCentral FocSign
- Synchronised Display by HDMI/VGA

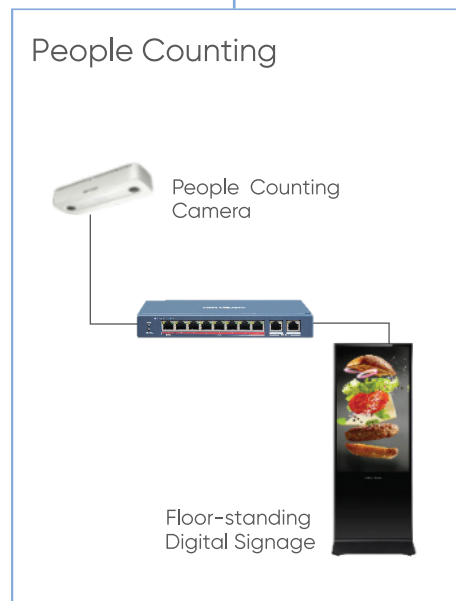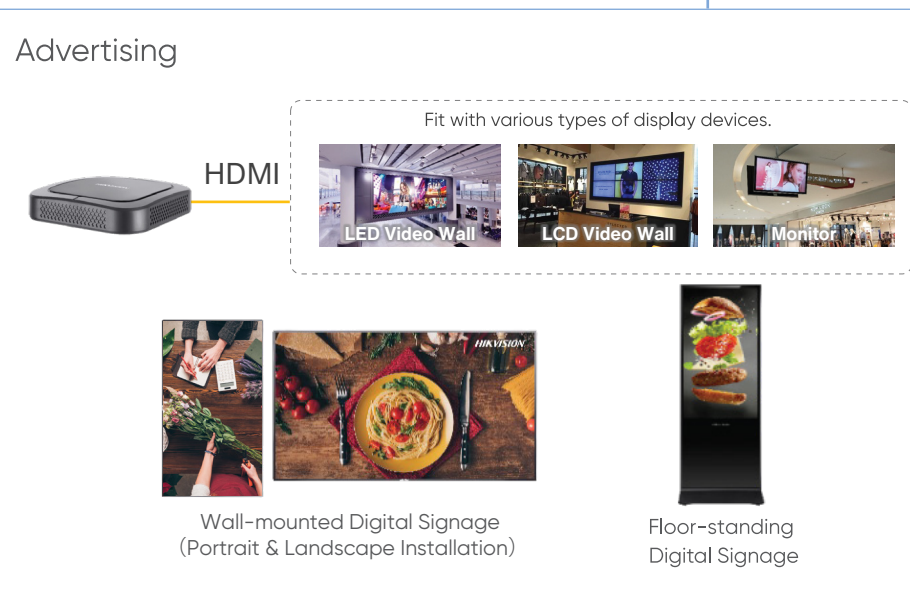

People Counting

Visualise and utilise valuable data collected from stores for business insights

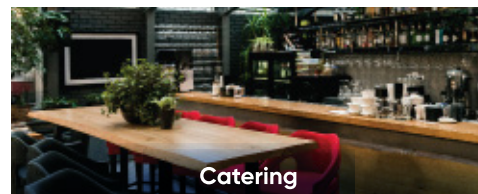

Digital Signage

Model		DS-D6022FN-B	DS-D6032FN-B	DS-D6043UN-B	DS-D6055UN-B	
Image						
Display	Screen Size	21.5"	31.5"	43"	55"	
	Active Zone (H × V)	478.656 × 260.28 mm	698.4 × 392.85 mm	941.184 × 529.416 mm	1,209.6 × 680.4 mm	
	Backlight	ELED backlight		LED backlight		
	Pixel Pitch	0.24795 × 0.24795 mm	0.36375 × 0.36375 mm	0.2451 × 0.2451 mm	0.315 × 0.315 mm	
	Resolution	1,920 × 1,080		3,840 × 2,160		
	Brightness	250 nits	350 nits	500 nits		
	Visual Angle	Horizontal: 178°, Vertical: 178°		Horizontal 178°, vertical 178°		
	Colour Depth	8 bit		8 bit	10 bit	
	Contrast	3000:1	4000 : 1	4,000 : 1	4,200 : 1	
	Response Time	14 ms	8 ms	8 ms		
	Refresh Rate	60 Hz		60 Hz		
	Colour Gamut	72% NTSC	68% NTSC	72% NTSC		
Built-in System	CPU	Cortex-A17, 4-core, 1.8 GHz		Cortex-A17, 4-core, 1.6 GHz		
	Memory	2 GB		2 GB		
	Operation System	Android 8.1		Android 8.1		
	Built-in Storage	16 GB		16 GB		
Interface	Video & Audio Inputs	No	AUDIO IN × 1, HDMI × 2, VGA × 1	AUDIO IN × 1, HDMI × 2, VGA × 1		
	Video & Audio Outputs	Audio In × 1, Audio Out × 2	AUDIO × 1, Built-in loudspeakers × 2	AUDIO OUT × 1, speaker (8 Ω 5 W) × 2		
	Network Interface	LAN × 1, Wi-Fi		LAN × 1, Wi-Fi × 1		
	Data Transmission Interface	USB 2.0 × 2, TF Card × 1, BT4.0x2, Wi-Fi	USB × 2, TF Card × 1	USB 2.0 × 2, TF Card × 1, BT4.0 × 1		
General	Power	100 to 240 VAC, 50/60 ± 3 Hz	100 to 240 VAC, 50 or 60 Hz	100 to 240 VAC, 50 or 60 Hz		
	Power Consumption	≤ 40 W	≤ 75 W	≤ 110 W	≤ 200 W	
	Standby Consumption	≤ 0.5W		≤ 0.5 W		
	Operating Temperature	0 to 40 °C (32 to 104 °F)		0 to 40 °C (32 to 104 °F)		
	Operating Humidity	20% to 90%	10% to 80%	10% to 80%		
	Product Dimensions (W × H × D)	516.75 × 320.03 × 53.55 mm	723.24 × 423.25 × 61.5 mm	967.18 × 555.42 × 77.44 mm	1,237.2 × 708 × 83.44 mm	
	Package Dimensions (W × H × D)	593 × 434 × 157 mm	898 × 544 × 152 mm	1,172 × 725 × 212 mm	1,403 × 898 × 263 mm	
Weight	Net weight: 3.03 kg (6.68 lbs) Gross weight: 4.63 kg (10.21 lbs)	Net weight: 5.90 kg (13.01 lbs) Gross weight: 8.60 kg (18.96 lbs)	Net weight: 11.16 kg Gross weight: 15.13 kg	Net weight: 19.2 kg Gross weight: 24.53 kg		

Digital Signage

Model		DS-D6043UL-B/S	DS-D6055UL-B/S	DS-D60C-B
Image				
Display	Screen Size	42.5"	54.5"	-
	Active Zone (H x V)	529.25 x 940.90 mm	1,209.6 x 680.4 mm	-
	Backlight	LED backlight		-
	Pixel Pitch	0.163 x 0.490 mm	0.21 x 0.63 mm	-
	Resolution	3840 x 2160		1920 x 1080p @ 30 Hz, 1920 x 1080p @ 50 Hz, 1920 x 1080p @ 60 Hz, 1280 x 720p @ 30 Hz, 1280 x 720p @ 50 Hz, 1280 x 720p @ 60 Hz, 3840 x 2160p @ 30 Hz, 3840 x 2160p @ 50 Hz, 3840 x 2160p @ 50 Hz (YCbCr420), 3840 x 2160p @ 60 Hz, 3840 x 2160p @ 50 Hz (YCbCr420)
	Brightness	500 nits		-
	Visual Angle	Horizontal 178°, vertical 178°		-
	Colour Depth	8 bit		-
	Contrast	5000 : 1	5700 : 1	-
	Response Time	8 ms	6.5 ms	-
	Refresh Rate	60 Hz		-
Colour Gamut	72% NTSC		-	
Built-in System	CPU	Cortex-A17, 4-core, 1.8 GHz		Cortex-A17, 4-core
	Memory	2 GB		2 GB
	Operation System	Android 8.1.0		Android 8.1.0
	Built-in Storage	16 GB EMMC		16 GB EMMC
Interface	Video & Audio Inputs	AUDIO IN x 1, HDMI IN x 2, VGA IN x 1		AUDIO IN x 1
	Video & Audio Outputs	AUDIO x 1, Built-in loudspeakers x 2		AUDIO OUT x 1, HDMI OUT x 1
	Network Interface	LAN x 1, Wi-Fi		LAN x 1, Wi-Fi
	Data Transmission Interface	USB x 2, TF Card x 1		USB2.0 x 2, Bluetooth4.0
General	Power	100 to 240 VAC, 50 or 60 Hz		12 VAC, 2 A
	Power Consumption	≤ 150 W		≤ 20 W
	Standby Consumption	≤ 10 W		≤ 1 W
	Operating Temperature	0 to 40 °C (32 to 104 °F)		0 to 40 °C (32 to 104 °F)
	Operating Humidity	10% to 90%	0% to 90%	10% to 90%
	Product Dimensions (W x H x D)	589.74 x 1,717 x 55 mm	740.78 x 1,878.2 x 55 mm	145 x 145 x 31.89 mm
	Packing Dimensions (W x H x D)	765 x 1,935 x 303 mm	916 x 2,100 x 303 mm	188 x 176 x 101 mm
Weight	Net weight: 48.46 Kg (106.84 lbs) Gross weight: 63.46 Kg (139.91 lbs)	Net weight: 66.190 Kg (145.92 lbs) Gross weight: 81.190 Kg (178.99 lbs)	Net weight: 0.6 kg (1.3 lbs) Gross weight: 0.65 kg (1.4 lbs)	



Who is Hikvision?

Our Mission and Vision

Hikvision is an IoT solution and big data service provider

Vision

Empower vision for the security and sustainable growth of the world.

Mission

To explore innovative ways to better perceive and understand the world.
To empower vision for decision-makers and practitioners, and work together to enhance safety and advance sustainable development around the world.

Hikvision Digital Signage Solution

HIKVISION[®]

Hikvision Oceania

Unit 14a/2 Eden Park Dr, Macquarie Park NSW 2113
salesau@hikvision.com



Hikvision Australia and New Zealand



www.hikvision.com/au-en/

