

DS-D5022F2-1V1 21.5 inch FHD VA 75 Hz



- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS FHD (1920 × 1080) display.
- 178° ultra-wide view screen.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

▪ Specification

Display	
Screen Size	21.45 inch
Active Display Area	478.656 (H) mm × 260.280 (V) mm
Resolution	1920 × 1080
Backlight	E-LED
Pixel Pitch	0.241 mm (H) × 0.241 mm (V)
Brightness	250 cd/m ²
Viewing Angle	178° (H)/178° (V)
Color Depth	8 bit, 16.7 M
Contrast Ratio	3000:1
Response Time	6.5 ms
Refresh Rate	Max. 75 Hz, Typ. 60 Hz
Haze	Haze 25%, 3H
Reliability	7 × 16 H
Color Gamut	72% NTSC
Interface	
Video & Audio Input	HDMI 1.4 × 1, VGA × 1
Power	
Power Supply	DC 12 V, 2.0 A
Power Consumption	≤ 24 W
Standby Consumption	≤ 0.5 W
Working Environment	
Working Temperature	0°C to 40 °C (32 °F to 104 °F)
Working Humidity	20% RH to 90% RH (Non-Condensing)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	10% RH to 90% RH (Non-Condensing)
General	
Casing Material	Plastic
VESA	75 mm × 75 mm (4 - M4 × 6 mm)
Bezel Width	2.38 mm (top/left/right), 21.55 mm (bottom)
Product Dimensions (W × H × D)	With base: 493.26 (W) mm × 393.45 (H) mm × 185.74 (D) mm (19.42" × 15.49" × 7.31") Without base: 493.26 (W) mm × 290.13 (H) mm × 42.35 (D) mm (19.42" × 11.42" × 1.67")
Package Dimensions (W × H × D)	599 (W) mm × 393 (H) mm × 109 (D) mm (23.58" × 15.47" × 4.29")
Net Weight	2.0 ± 0.5 kg (4.41 ± 1.10 lb)
Gross Weight	3.2 ± 0.5 kg (7.05 ± 1.10 lb)
Packing List	Monitor × 1, Base component × 1, Power adapter (12 V, 2.0 A) × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1
Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information

Physical Interface

Interface	Description	Interface	Description
HDMI	HDMI 1.4 digital signal input interface	VGA	VGA analog signal input interface
DC	DC 12 V 2.0 A input interface		

HDMI


VGA

DC

Available Model

DS-D5022F2-1V1

Dimension

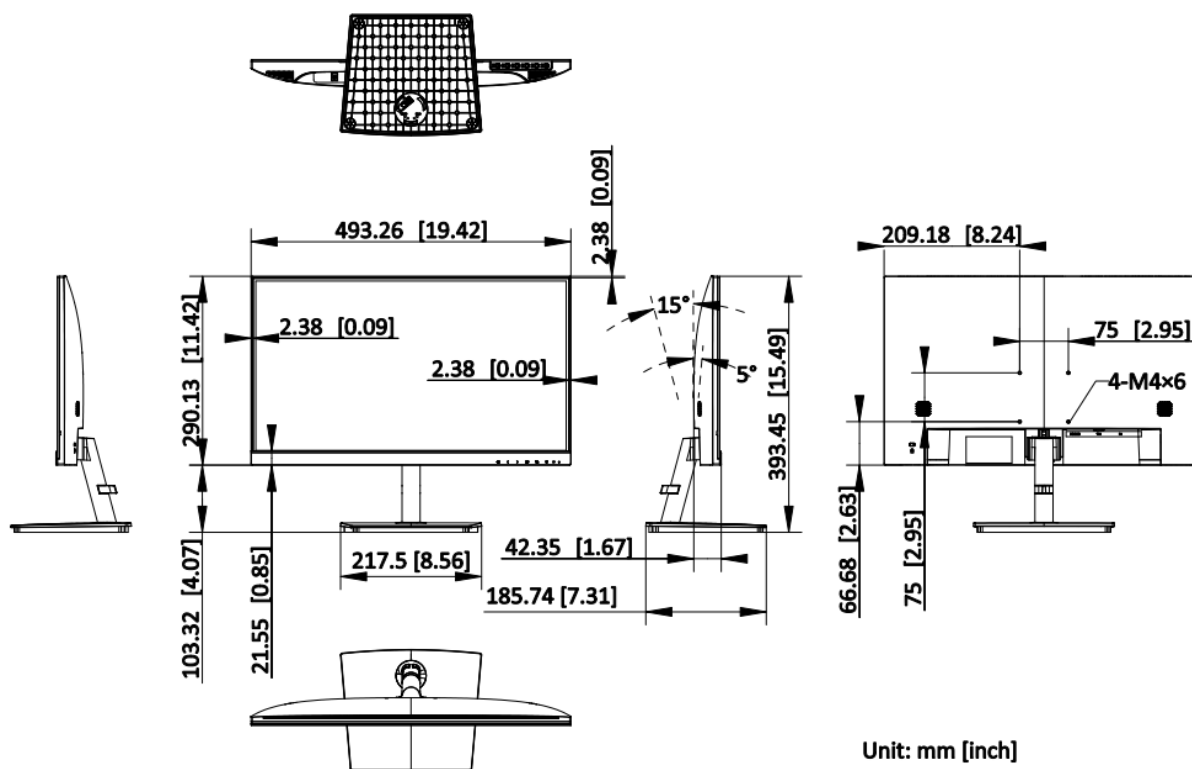

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq

