

DS-K3G4402 Tripod Turnstile

The DS-K3G4402 tripod turnstile is designed to detect unauthorized entrance or exit of public passages. By adopting the tripod turnstile integratedly with the access control system, person should authenticate to pass through the lane via presenting IC or ID card etc. It is widely used in gates of construction sites, factories, residences, campus, stadiums, etc.



Available Model

DS-K3G4402

Feature

- Stable mechanical components and turntable design
- Bidirectional (Entering/Exiting) lane
- When the power is down, the barrier will be dropped automatically for emergency evacuation
- System will cancel the passing permission if a person does not pass through the lane within the valid passing duration
- LED indicates the passing direction (forbidden or available).
- Adjust the passing time duration via DIP switch on the control board
- Multiple people can pass through the lane at a time after the continuous authentications of the passed people.
- Standard system input; wires with different kinds of card readers.
- Remote control and management
- Stable system operation and low noise operation



Specification

Model	DS-K3G4402
Power supply	100 to 240 VAC, 50/60 Hz
Pedestal material	SUS304
MCBF	3 million times
Throughput	30 to 45 people/minute



Model	DS-K3G4402
Lane width	550 mm (21.7")
Drop-arm length	510 mm (20.1")
Working temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Working humidity	5% to 90% (No condensing)
Dimension per pedestal (W × H × D)	With packaging: 570 mm × 1120 mm × 370 mm (22.4" × 44.1" × 14.6") Without packaging: 480mm × 960mm × 280 mm (18.9" × 37.8" × 11.0")
Application environment	Indoor
Weight per pedestal (with packaging)	40 kg (88.2 lb)
Weight per pedestal (without packaging)	35 kg (77.2 lb)

Dimension

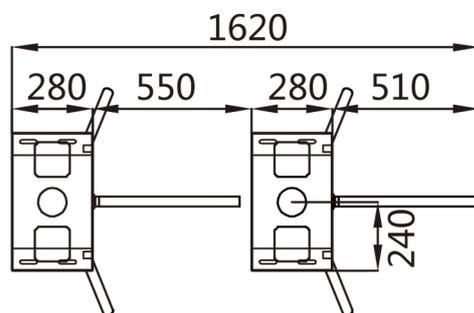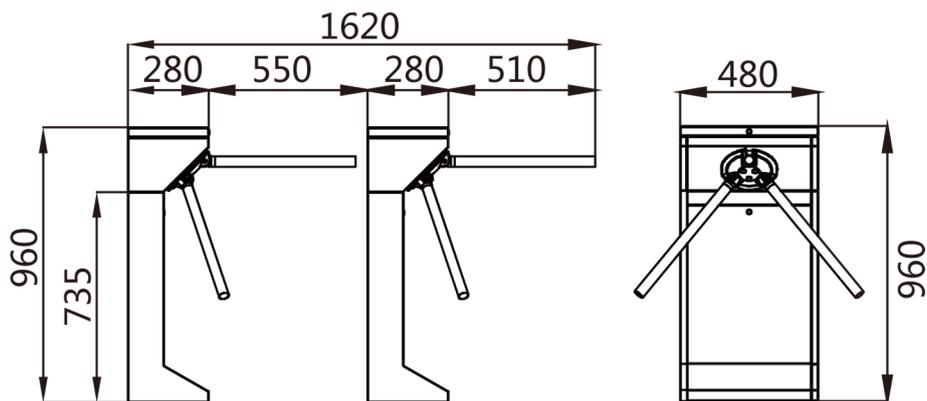

Unit: mm

Maintenance

The main element of the turnstile is stainless steel, which is rustless (antioxidant) and corrosion resistant (The anti corrosion ability in the medium of acid, alkali, and salt). In order to keep the stainless steel from being oxidized or corroded, you should clean and care the turnstile surface periodically .

The instructions and tips for maintaining the turnstile are as follows:

- Select different stainless steel types according to the variety of the environments. You can select 304 stainless steel for common circumstances and 316 stainless steel for the scenarios of seashores and chemical plants.
- Keep the device surface clean and dry.
- Use non-woven cloth and ethyl alcohol to clean the dirt on the device surface.
- Use sourcing pad (do not use mesh cleaning ball) to clean the rust on the device surface by following the wire drawing on the stainless steel. And then use non-woven cloth and stainless steel cleaner to wipe the device surface.
- Clean and maintain the device by using non-woven cloth and stainless steel cleaner periodically. It is suggest to clean the device every month in common circumstances and every week for severe environments (seaside and chemical plants for instance).

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com