


DS-2CE55A2P(N)-VFIR


700TVL DIS IR Dome Camera

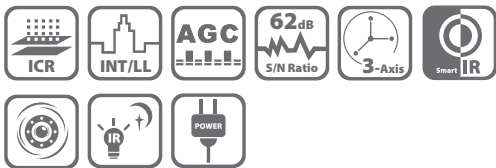

Key features

- 1/3" DIS
- 700 TVL horizontal resolution
- 2.8 – 12mm vari-focal lens
- True Day/Night
- Up to 30m IR distance
- Smart IR mode
- Wide operating temperature range

Dimensions

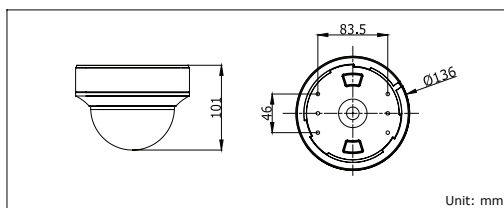

| DS-2CE55A2P(N)-VFIR | |
|----------------------------------|---|
| Camera | |
| Image Sensor | 1/3" DIS |
| Signal System | PAL/NTSC |
| Effective Pixels | 976(H)×496(V) |
| Min. Illumination | 0.1 Lux @ (F1.2, AGC ON) 0.14 Lux @ (F1.4, AGC ON) |
| Shutter speed | PAL: 1/25 s to 1/100,000 s NTSC: 1/30 s to 1/100,000 s |
| Lens | 2.8 - 12 mm @ F1.4 Angle of view: 80° - 27.2° |
| Lens Mount | φ14 |
| Angle Adjustment | Pan: 0 - 355°, Tilt: 0 - 180°, Rotation: 0 - 355° |
| Day & Night | ICR |
| Horizontal Resolution | 700 TVL |
| Synchronization | Internal synchronization |
| Video Output | 1Vp-p composite output (75 Ω/BNC) |
| S/N Ratio | More than 62 dB |
| General | |
| Working Temperature/ Humidity | -40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing) |
| Power Supply | 12 V DC |
| Power Consumption | Max. 4.2W |
| IR Range | 30 m |
| Dimensions | Φ 136 × 101 mm (Φ 5.35" × 3.98") |
| Weight | 380 g (0.84 lb) |

Order models

DS-2CE55A2P-VFIR
DS-2CE55A2N-VFIR