

HIKVISION

HiLook



HiLook

Intercom Products

HiLook Intercom Kit

Video Quality	2 MP, H: 129°, V: 75°
Screen Size	7" touch screen
Door Station Protection Level	IP65
Mobile App Control	YES
Capacity	Indoor station: 1 + 16 (max.) Door station: 1 + 16 (max.)
Accessory	Rain Cover: DS-KABV6133-RS


Video Quality	2MP, H:131° V:78°
Screen Size	7" touch screen
Door Station Protection Level	IP65
Mobile App Control	YES
Capacity	Indoor station: 1 + 16 (max.) Door station: 1 + 16 (max.)
Accessory	Angle Bracket: DS-KABV6113-A Rain Cover: DS-KABV6113-RS

Video Quality	2 MP, H: 140°, V: 85°
Screen Size	7" touch screen
Door Station Protection Level	IP65
Mobile App Control	YES
Capacity	1 to 1
Accessory	/


Video Quality	2 MP, H: 117°, V: 70
Screen Size	7" touch screen
Door Station Protection Level	IP65, IK08
Mobile App Control	YES
Capacity	Indoor station: 1 + 2 (max.) Door station: 1 + 1 (max.)
Accessory	Angle Bracket: DS-KABV6113-A

Video Quality	720P, H: 130°, V: 70°
Screen Size	7" non-touch screen
Door Station Protection Level	/
Mobile App Control	NO
Capacity	Indoor station: 1 + 2 (max.) Door station: 1 + 1 (max.)
Accessory	Angle Bracket: DS-KABV24-A

IP Intercom Kit




HA-DS-IP2



HA-IN-IP2

IP Intercom Kit



HA-DS-IP1




HA-IN-IP1

2-Wire Intercom Kit



HA-DS-Y2




HS-IN-Y72

Hybrid Kit



HA-DS-H1



HA-IN-H1

4-Wire Kit



HA-DS-A2



HA-IN-A2

IP Intercom Kit

HA-KIT-IP2


What's in the package

Includes one indoor monitor, one door station, 32GB TF card, wall mount bracket and one Australian standard power adapter.


Features

- Modern look with a slim-bezel indoor monitor and a sturdy metal-framed door station.
- Easy to add up to 16 indoor units.
- Control everything from Hik-Connect app.
- PC free quick setup with easy wizard.

IP65
RATING




HA-DS-IP2



HA-IN-IP2

Topology

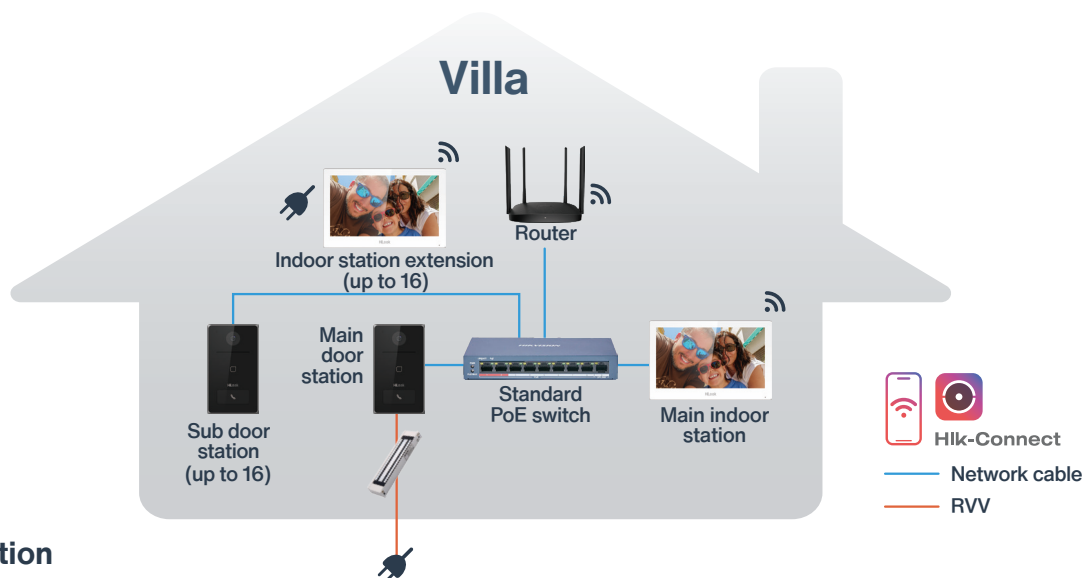

Specification

HA-DS-IP2	Camera	2MP HD camera
	Night vision	Low illumination IR supplement mode: 2.5m
	Backlight compensation	Support
	Digital noise reduction	Support
	WDR	True WDR
	Field of view	Horizontal: 129° Vertical: 75°
	Motion detection	Support
	Network protocol	TCP/IP, SIP, RSTP
	Wi-Fi	2.4GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
	Door station/Device interfaces	RS-485 * 1
	Lock control	1 relay, Max. 30 VDC 2 A
	Dimension	181.6 mm × 103.6 mm × 29.5 mm
	Protection level	IP65
	Power supply	IEEE802.3af, standard PoE or 12 VDC
HA-IN-IP2	Display screen	7-inch colorful TFT screen
	Display resolution	1024 × 600
	Operation method	Capacitive touch screen
	Wired network	1 RJ-45, 10/100 Mbps self-adaptive
	Wireless network	2.4 GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
	Power supply	Standard PoE/ 12 VDC

IP Intercom Kit

HA-KIT-IP1

What's in the package

Includes an indoor monitor, door station, wall mount bracket, and two Australian standard power adapters.

Features

- Easily expand with up to 16 indoor units
- Plug & Play setup with Wi-Fi and PoE support
- Receive video calls and unlock doors via mobile app—anytime, anywhere
- IP65-rated water resistance for reliable outdoor use

IP65
RATING




HA-DS-IP1



HA-IN-IP71

Topology

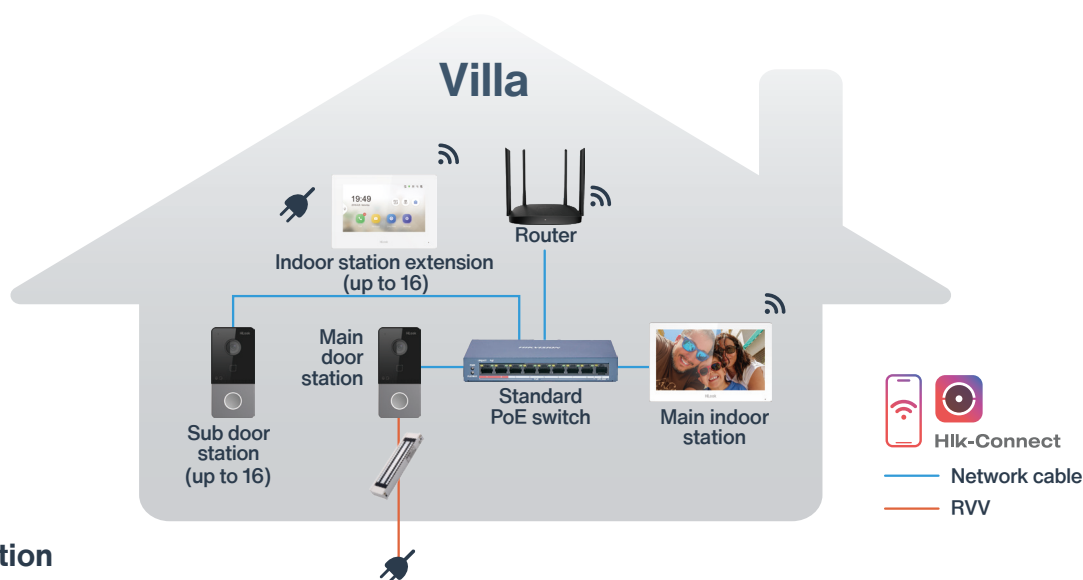

Specification

HA-DS-IP1	Camera	2MP HD camera
	Night vision	Low illumination IR supplement mode: 3m
	Backlight compensation	Support
	Digital noise reduction	Support
	WDR	True WDR
	Field of view	Horizontal: 131° Vertical: 78°
	Motion detection	Support
	Network protocol	TCP/IP, RSTP
	Door station/Device interfaces	RS-485 * 1
	Lock control	1 relay, Max. 30 VDC 2 A
	Dimension	138 mm × 65 mm × 27 mm
	Protection level	IP65
	Power supply	IEEE802.3af, standard PoE or 12 VDC
HA-IN-IP71	Display screen	7-inch colorful TFT screen
	Display resolution	1024 × 600
	Operation method	Capacitive touch screen
	Wired network	1 RJ-45, 10/100 Mbps self-adaptive
	Wireless network	2.4 GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
	Power supply	Standard PoE/ 12 VDC

2-Wire Intercom Kit

HA-KIT-PY2

What's in the package

Includes one indoor monitor, one door station, rain cover, wall mount bracket and one Australian standard power adapter.


Features

- 2-wire video intercom kit for villas or houses.
- Easy Plug-and-Play, one-to-one system.
- Control everything with a single app.
- Durable outdoor station with a high-quality stainless steel panel.

IP65
RATING




HA-DS-Y2



HS-IN-Y72

Topology

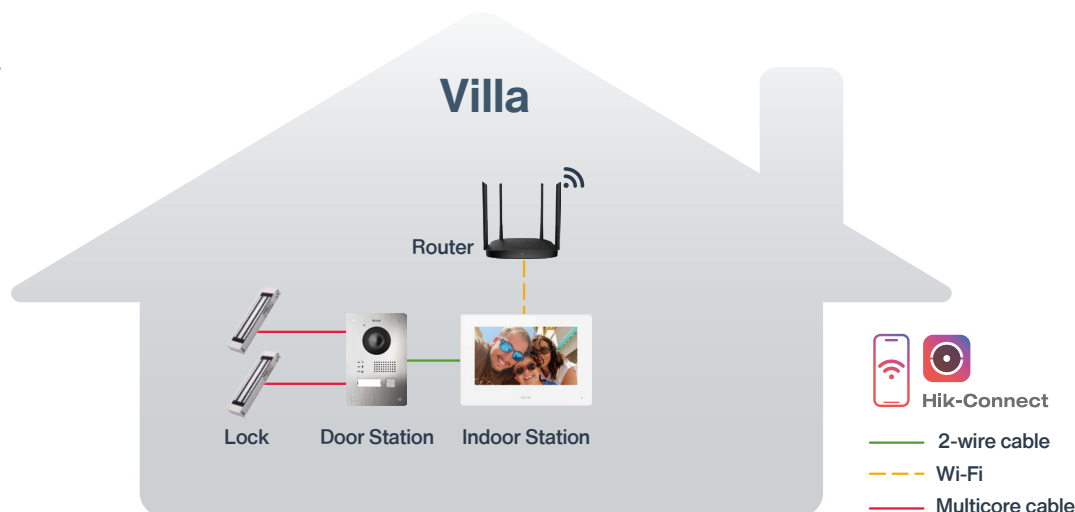

Routing Path	Cable Specification				
	AWG24	AWG20	AWG18	AWG16	Parallel Lines (0.5mm ² -0.8mm ²)
Door Station to Indoor Station Transmission Distance	≤ 35m	≤ 60m	≤ 60m	≤ 50m	≤ 35m

Specification

HA-DS-Y2	Camera	2MP HD camera
	Resolution	Main stream: 1280*720P, 1920*1080p Sub stream: 640*480
	Night vision	Low illumination IR supplement distance: 3 m
	WDR	Support
	Field of view	Horizontal: 140° Vertical: 85°
	Built-in 1*omnidirectional microphone and Built-in 1*loudspeaker, 8Ω	
	Wired network	2-Wire wiring
	Alarm input	2(Exit button or door contact)
	Output	1*12 V/500 mA output
	Protection level	IP65
	Power supply	From indoor station
HS-IN-Y72	Display screen	7-inch TFT touch screen
	Display resolution	1024 × 600
	Network parameters	Wired network 1*10 Mbps through 2-wire interface Wireless network: Wi-Fi 802.11 b/g/n, 2.400-2.4835 GHz
	Power input	24VDC/1.5A

Hybrid Kit

HA-KIT-H1

What's in the package


Includes one indoor monitor, one door station, 5-meter 4-wire cable, wall mount bracket and one Australian standard power adapter.

Features

- A highly budget-friendly, internet-enabled solution.
- Indoor station with daisy-chain connection for simpler wiring.
- Convenient all-in-one app control.




HA-DS-H1

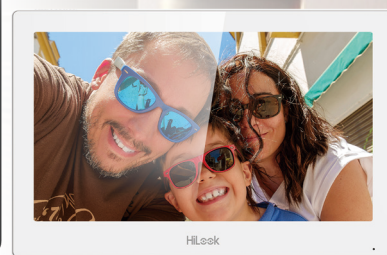


HA-IN-H1

Topology

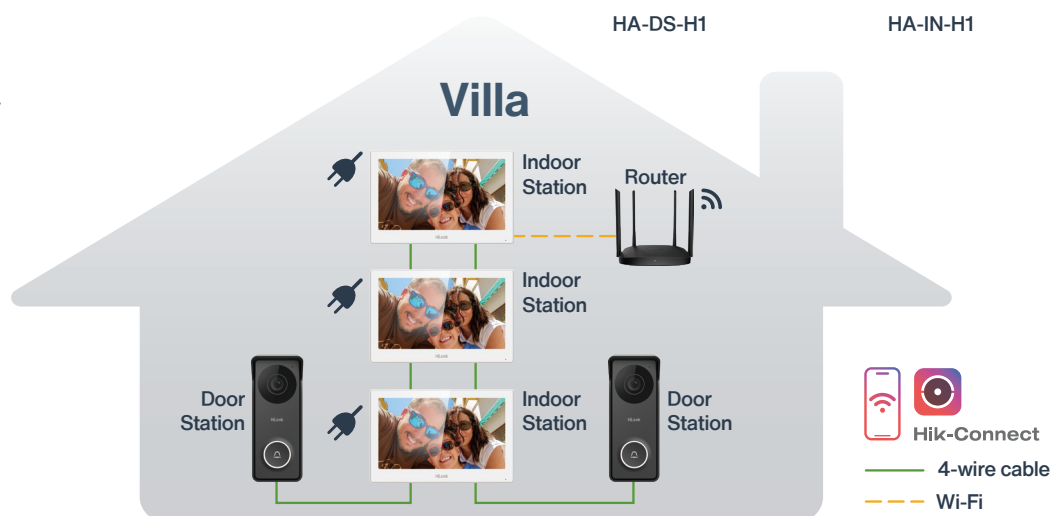

Wiring suggestion

If you use two groups of parallel cables or twisted pairs instead of the supplied white four-wire cables for wiring, you should put the blue cable (video) and black cable (ground) in the same group of parallel cables or twisted pairs and put the yellow cable (audio) and red cable (power) in the same group.

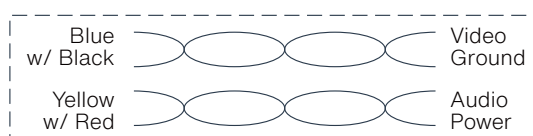

Routing Path	Cable Specification			
	AWG24	AWG20	AWG18	AWG16
Door Station to Indoor Station Transmission Distance	≤ 10m	10m< ≤ 30m	30m< ≤ 50m	50m< ≤ 100m

Specification

HA-DS-H1	Supplement light	IR light, up to 3 m
	Resolution	Stream resolution:1280 * 720@60fps
	FOV	Horizontal: 117°, Vertical: 70°, Diagonal: 141°
	Lock control	1 relay, max 30 V 1 A
	Power supply input	From indoor station
	Dimension (W × H × D)	55 mm × 145 mm × 24 mm
	Protective level	IP65, IK08
	Material	Aluminum alloy
HA-IN-H1	Type	7 inch Colorful TFT
	Resolution	1024 × 600
	Operating method	Capacitive touch screen
	Wi-Fi	Wi-Fi 802.11 b/g/n
	Power supply input	12 VDC

4-Wire Kit

HA-KIT-A2

What's in the package

Include one indoor monitor, one door station, 5-meter 4-wire cable, wall mount bracket and one Australian standard power adapter.

Features

- HD TVI video quality with a wide field of view (96% improvement over traditional solutions).
- Indoor station supports daisy-chain connection for easy wiring.
- Easy plug-and-play setup for the analog system.



HA-DS-A2




HA-IN-A2

Topology



Wiring suggestion

If you use two groups of parallel cables or twisted pairs instead of the supplied white four-wire cables for wiring, you should put the blue cable (video) and black cable (ground) in the same group of parallel cables or twisted pairs and put the yellow cable (audio) and red cable (power) in the same group.

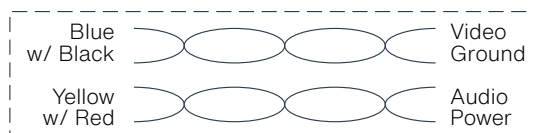

	Cable Specification			
Routing Path	AWG24	AWG20	AWG18	AWG16
Door Station to Indoor Station Transmission Distance	≤ 10m	10m< ≤ 30m	30m< ≤ 50m	50m< ≤ 100m

Specification

HA-DS-A2	Supplement light	IR light, up to 3 m
	Resolution	Stream resolution: 1280 * 720@60fps
	FOV	Horizontal: 130°, Vertical: 70°
	Built-in omnidirectional microphone and loudspeaker	
	Lock control	1 relay, max 30V 1 A
	Button	1 physical button(s)
	Power supply	From indoor station
	Dimensions	136mm x 51mm x 20mm
	Material	Plastic
HA-IN-A2	Type	7-inch colorful TFT
	Resolution	1024 x 600
	Power supply input	12V DC
	Four-Wire interface	4 in all, 2 for indoor extensions, 2 for doorphones
	Dimensions (W x H x D)	178mm x 132mm x 19mm



Australia

Sydney office
46 Brookhollow Ave, Baulkham Hills, NSW 2153
Hotline: +61 1300 976 305

