Our AcuSense Live-Guard Camera, provides you an all-in-one Security Camera which includes an in-built speaker with the option of a voice warning message or siren alert and strobe light which can activate when a person and/or vehicle are detected. You can also easily arm or disarm selected cameras or the entire system from your mobile phone app.

Application Scenarios

HOUSE



WAREHOUSE







What the market needs

As security awareness is increasing in Australia, property owners and managers require a more intelligent generation of security solutions.



Instant warning to intruders



Reliable Push-notifications to Hik-Connect to alert property owner/manager




Unified APP to arm/disarm all security devices


Features of AcuSense Live-Guard Solution


01

AcuSense Technology

With built-in AcuSense technology, these cameras have the ability to distinguish humans/vehicles from other moving objects in a scene, and perform better than a PIR detector on false alarm reduction.

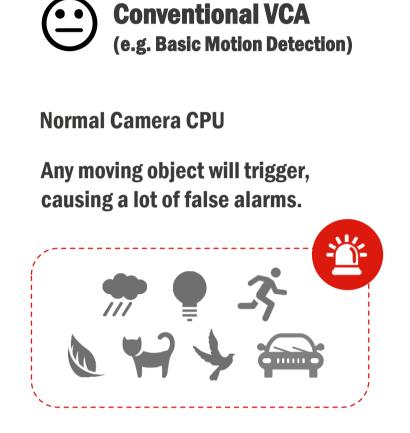




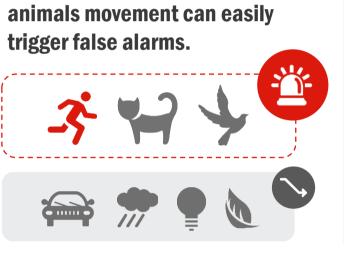




Deep-learning algorithm

Focus on Human and Vehicles Reducing False Alarm by about 95%



Four functions within One camera


Conventional security cameras only provide evidence of the crime, whereas AcuSense live guard cameras are also equipped with a flashing light and pre-recorded audio which could be triggered immediately to warn the intruders off. At the same time, real-time alerts will be sent to the app. for prompt action.

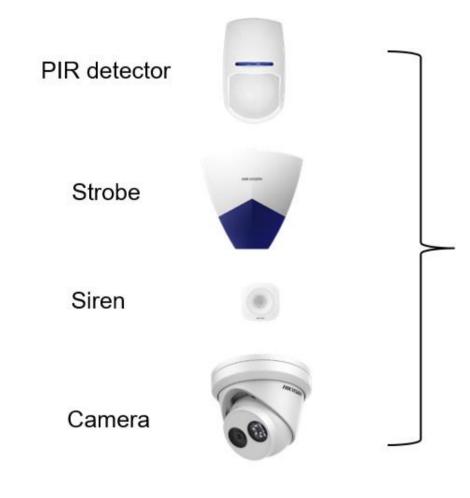



Conventional solution

Camera can only provide evidence after crime

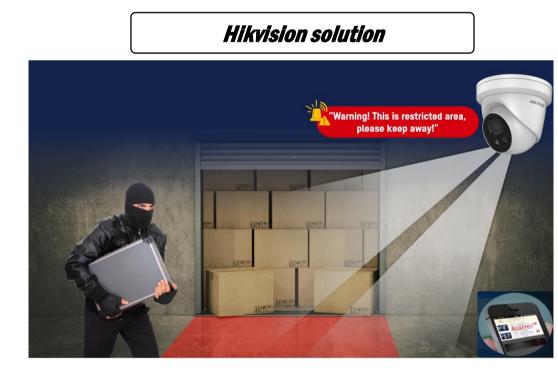


Strobe light and audio alarm for driving intruders away, real-time and efficient alerts for prompt action


Unified APP to arm/disarm system




With the Hik-Connect APP, up to 4 alarm areas are supported. Away arm, stay arm and schedule arm modes make the system more flexible to use. Also, it supports arming our AX hub and the solution with one button via wired connection with the NVR alarm input interface.

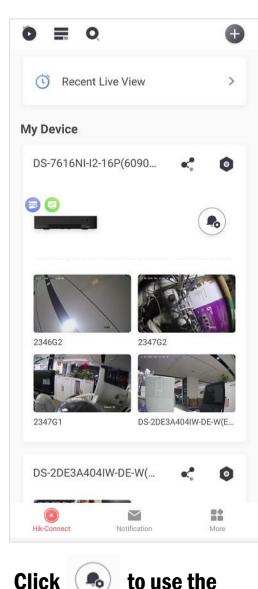


to use the solution

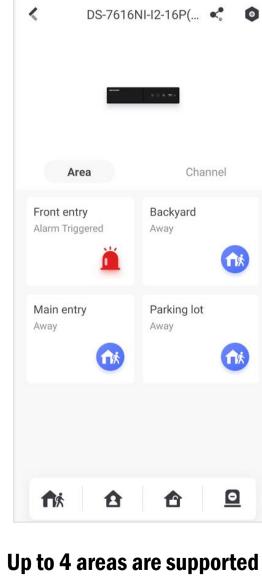

to arm/disarm

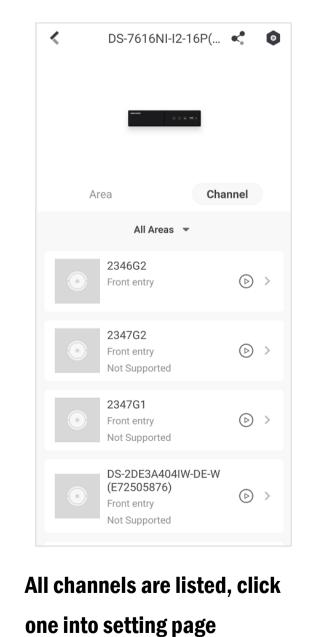

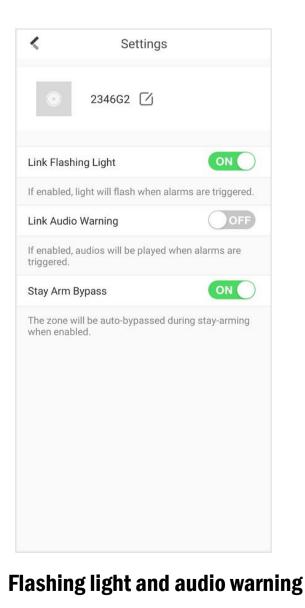

are separately enabled. Camera can work at 'stay arm bypass' mode.

Product Combo











Specified FW is necessary



11/2

FW V5.5.150 or above

I series NVR

DS-2CD2646G2-IZSU/SL



