


HIKVISION®

LED POSTER DISPLAY

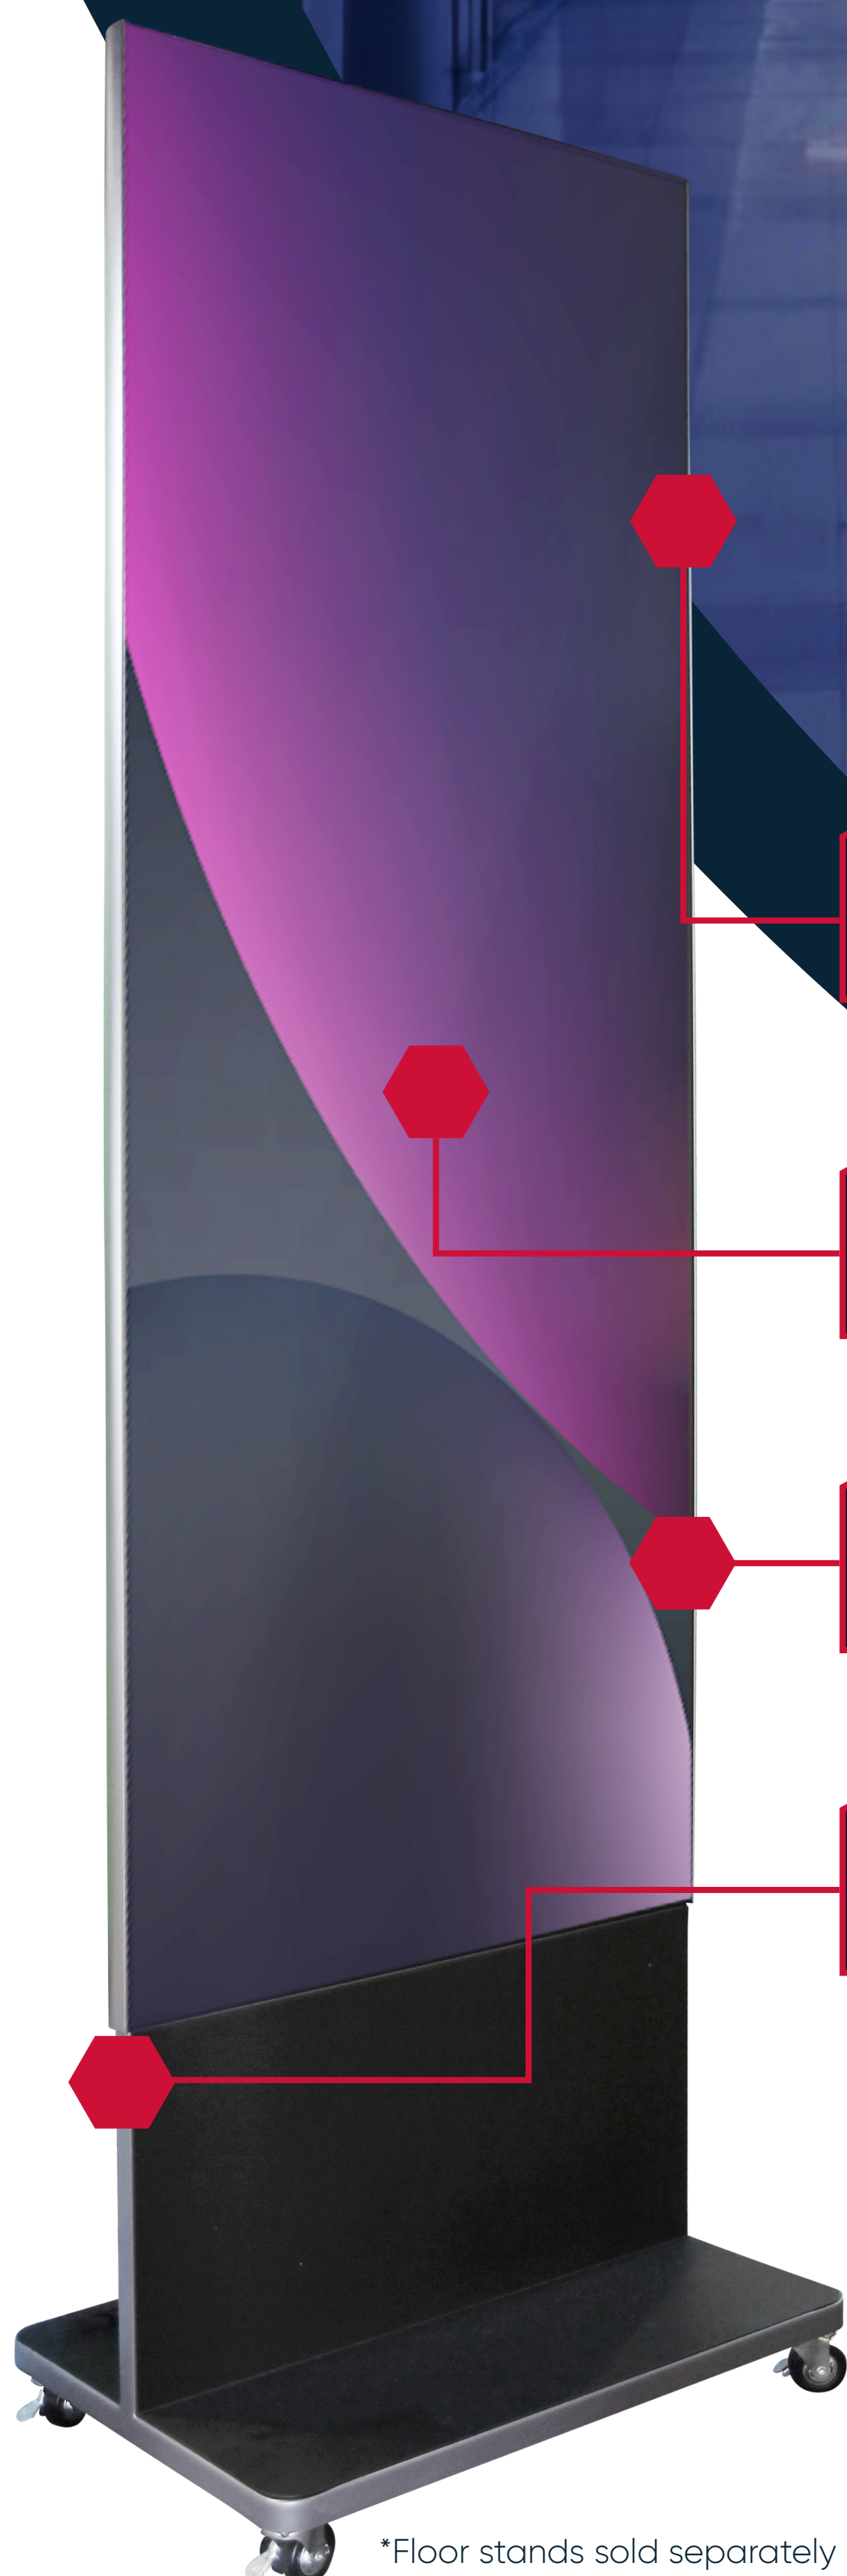

*Floor stands sold separately

EASY SEAMLESS SPLICING TO FORM A LARGE SCREEN

SUPERIOR IMAGE/VIDEO QUALITY & EYE-CATCHING BRIGHTNESS

SUPER THIN AT 2.68IN,
SUPER LIGHT AT 29-32KG

SUPPORTS FLEXIBLE MOUNTING SOLUTIONS

LEARN MORE



CONVENIENT ADVERTISING


Manage advertising programs with HikCentral FocSign for scheduled release, multiple templates, etc.

FLEXIBLE DEPLOYMENT

Support a max. of 10 pieces of self-splicing with HDMI cables



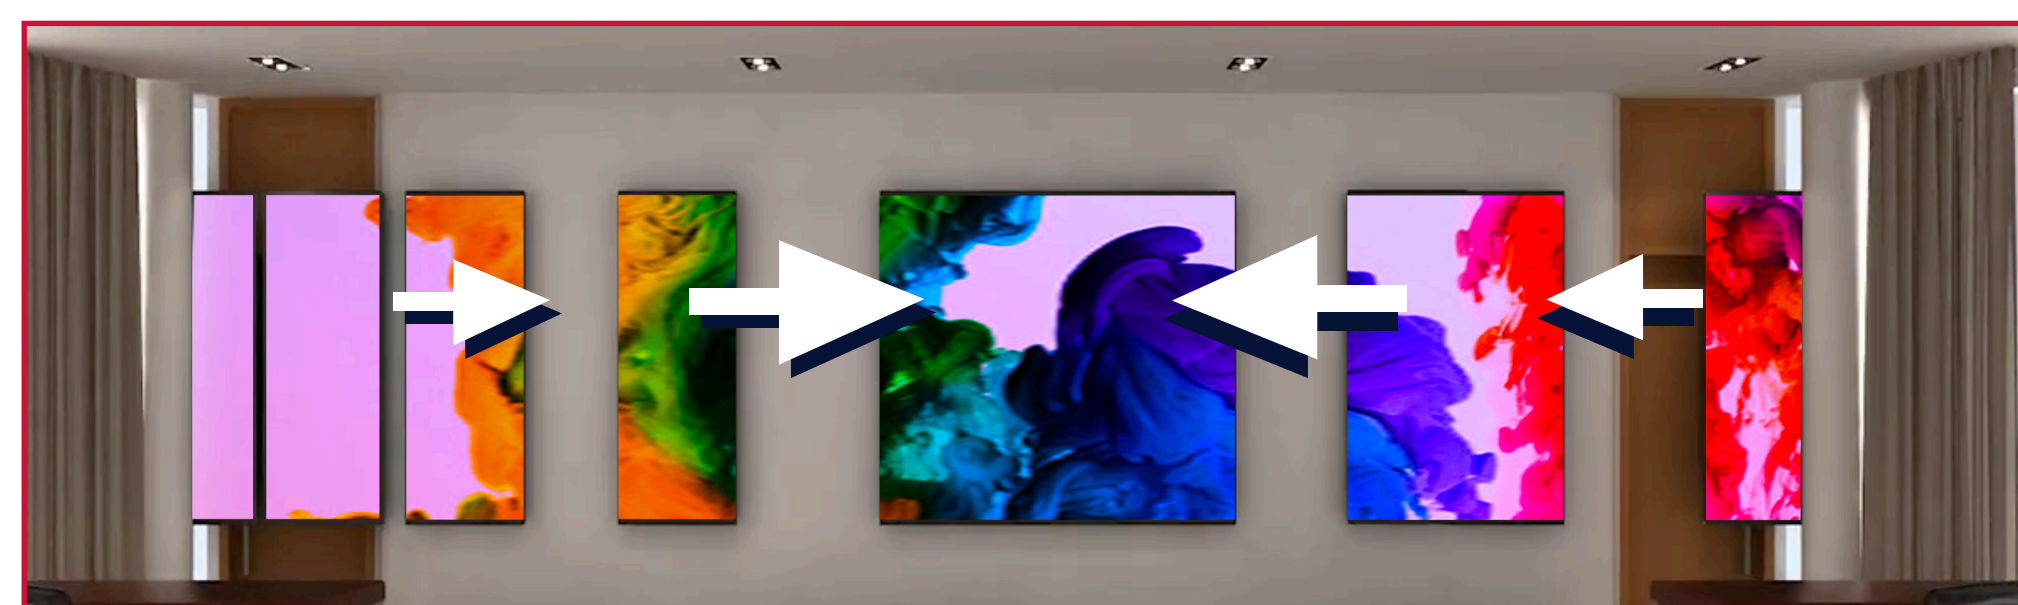


UNEVEN SPLICING CAPABILITY



10 PIECE LED
WALL MOUNTING SOLUTIONS



Model		DS-D4212MI-070(B) P1.2 Ultra Slim LED poster	DS-D4215MI-070(B) P1.5 Ultra Slim LED poster	DS-D4218MI-070(B) P1.8 Ultra Slim LED poster
Image				
Cabinet	Pixel Configuration	SMD Triad LED	SMD Triad LED	SMD Triad LED
	Pixel Pitch Category	P1.2	P1.5	P1.8
	Pixel Pitch	1.25 mm	1.5625 mm	1.875 mm
	Modules Component	Cabinet x 5, single cabinet (2 x 4)	Cabinet x 5, single cabinet (2 x 4)	Cabinet x 5, single cabinet (2 x 4)
	Dimensions (W x H x D)	613 x 1695.5 x 68.1 mm (24.1 x 66.8 x 2.7 inch)	613 x 1695.5 x 68.1 mm (24.1 x 66.8 x 2.7 inch)	613 x 1695.5 x 68.1 mm (24.1 x 66.8 x 2.7 inch)
	Resolution	480 x 1350	384 x 1080	320 x 900
	Area	1.0125 m²	1.0125 m²	1.0125 m²
	Weight	32.5 kg (71.65 lb.)	29 kg (64.0 lb.)	29 kg (64.0 lb.)
	Pixel Density	640000 dots/m²	409600 dots/m²	284444 dots/m²
	Lamp Board Housing	Without housing, glue potting	Without housing, glue potting	Without housing, glue potting
Display	Cabinet Material	Aluminum alloy	Aluminum alloy	Aluminum alloy
	Maintenance Method	Front maintenance for cabinet, and rear maintenance for system backpack	Front maintenance for cabinet, and rear maintenance for system backpack	Front maintenance for cabinet, and rear maintenance for system backpack
	White Balance Brightness	600 cd/m²	600 cd/m²	600 cd/m²
	Colour Temperature	3000 to 10000 K adjustable	3000 to 10000 K adjustable	3000 to 10000 K adjustable
	Viewing Angle	Horizontal 160°, vertical 160°	Horizontal 160°, vertical 160°	Horizontal 160°, vertical 160°
	Contrast Ratio	≥ 3000:1	≥ 3000:1	≥ 3000:1
	Brightness Uniformity	≥ 97%	≥ 97%	≥ 97%

ALL-IN-ONE DESIGN

- Built-in Digital Signage player and storage allows remote management with Focsign software
 - Built-in LED controller
 - Ultra fine Pixel Pitch at P1.2, P1.5, and P1.8
- Patent pending Hikvision GOB (Glue On Board) Craft Surface Colloid Layer for better protection (waterproof, moisture proof, anti-corrosion, dust-proof, anti-static, anti-oxidation)



Build-in LED
Controller



Central Advertisement
Management



Self Splicing



GOB Technology



Flexible Deployment