


Facial Recognition Access Control Terminal

Convenient, Secured Access – No Card Needed

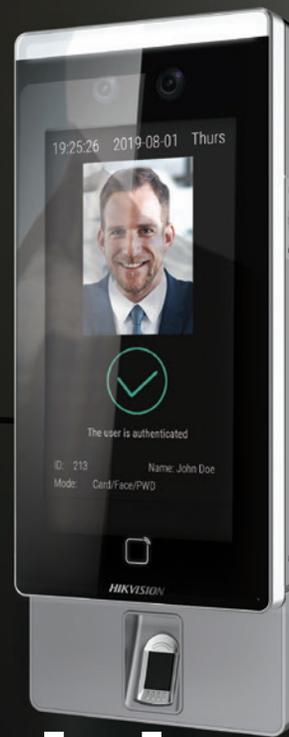

No Card is Needed

Imagine convenient and secure access control, with no key card required. No more searching for your card when it's cold outside, or worrying about forgetting your card at home. Hikvision's new facial recognition access control terminal DS-K1T671M and the DS-K1T671MF provide easy, controlled building access and so much more.

Both the DS-K1T671M and DS-K1T671MF are equipped with a 2 MP, wide angle, dual-lens, anti-spoofing camera system that can recognize live faces, even in dark environments. The DS-K1T671M has the capacity to recognize up to 5,000 different faces, 6,000 MIFARE contactless cards, store up to 50,000 events. The DS-K1T671MF has 5,000 fingerprint recognition capacity thanks to the fingerprint module.

The terminals can perform as an all-in-one access control controller with support for a secondary card reader, or it can connect to an external access control controller or terminal securing unit using Wiegand or RS-485 interfaces. Important access control interfaces including a lock relay, request to exit (REX), alarm I/O and a tamper alarm are also included.

A large 7-inch LCD touch screen simplifies configuration and user interaction. Hikvision's facial recognition access control terminal integrates with Hikvision NVRs, allowing live view and playback.

Bringing security and convenience to users, visitors can call residents who can see and communicate with the visitor, and unlock the door remotely using the free Hik-Connect mobile app or a Hikvision video intercom indoor station. The combination of video surveillance, access control, video intercom and attendance tracking functions make this terminal a versatile and concise solution for multiple challenges.



DS-K1T671M



DS-K1T671MF

Key features include:

- 7-inch LCD Touch Screen for Easy Programming and Operation
- 2 MP Dual Wide-Angle Lens for Enhanced Face Recognition from 1 to 10 Feet
- Reliable Face Recognition in High to Low Light Environments
- Extensive Capacity of up to 5,000 Faces, 5,000 Fingerprints, 6,000 Cards and 50,000 Event Records
- Supports Two-Factor Authentication with Face and Contactless Card/Key Fob
- Quickly Recognizes Faces in Less Than 0.2 Seconds
- Stand-Alone Operation or Integrate with Existing Systems

The DS-K1T671M and DS-K1T671MF becomes an intercom outdoor station and can support up to 500 apartments when paired with the optional Hikvision 7" indoor stations below.



Pro Model DS-KH8350-WTE1 Indoor Station

- 7" Colorful IPS Capacitive Touch Screen with Premium Tempered Glass
- Aerospace-Grade Aluminum Frame
- Stores Messages and Captured Pictures
- Physical Button for Unlocking the Door Fast
- View Live Videos of Door Stations and IP Cameras
- Standard PoE



Value Model DS-KH6320-WTE1 Indoor Station

- 7" Colorful TFT Capacitive Touch Screen with Premium Tempered Glass
- Stores Messages and Captured Pictures
- View Live Videos of Door Stations and IP Cameras
- Standard PoE


Facial Recognition Access Control Terminal Specs

Product no.	DS-K1T671M	DS-K1T671MF
Operating System	Linux	
Screen	7-inch, 1024 x 600, 9:16 touchscreen	
Camera	2 MP dual-lens camera, WDR	
Indicator	Supported	
Recognition Mode	Face: 1:1 and 1:N, Fingerprint: 1:1 and 1:N	
Face Capacity	5,000	
Fingerprint Capacity	N/A	5,000
Face Recognition Duration	< 0.2 s per person	
Face Recognition Distance	1 to 10 ft. (0.3 to 3 m)	
Face Recognition Height	4' 7" to 6' 3" (1.4 to 1.9 m) (suggested)	
Card Capacity	6,000	
Card Type	MIFARE MF1 IC S50	
Card Swiping Duration	< 1 s	
Card Swiping Distance	0 to 2 in. (0 to 5 cm)	
Event Capacity	50,000	
Interface	1x Network, 1x RS-485, 1x Wiegand, 1x USB, 1x alarm output, 2x alarm input, 1x lock, 1x door contact, 1x exit button, 1x tamper	
Network	10/100/1000 Mbps self-adaptive	
Operating Voltage	DC 12 V, 3 A maximum	
Operating Temperature	-22° F to 140° F (-30° C to 60° C)	
Operating Humidity	0 to 90% (non-condensing)	
Protection Level	IP65	


Do not expose equipment to direct sunlight, low ventilation or heat sources such as a heater or radiator, which can cause fire danger.

Accessories (not included)	
	
DS-KAB671-S Protective Rain Shield	DS-KAB671-B Mounting Pole

Dimension of DS-K1T671M



Dimension of DS-K1T671MF



Application Examples




APARTMENTS



COMMERCIAL BUILDING ENTRANCES



LOADING BAYS & DOCKS



MEDICAL CLINICS



K-12 SCHOOLS (MAIN ENTRANCE)



GATE OPERATION (RESIDENTIAL & COMMERCIAL)