

Title:	DS-PD1-WL-W How to reset and connect	Version:	v1.0	Date:	19/12/2019
Product:	Alarm	Page:	1 of 4		

HIKVISION

DS-PD1-WL-W

How to reset and connect

(2019-12-19)

Wireless water leak detector parameters

RF transmission distance	300m (open area)
Tamper Switch	YES
Detection method	Touch
Working Temperature	-10°C ~ +55°C
Working Humidity	≤95%RH
Dimensions (mm)	73 x 52 x 21

Wireless water leak detector appearance



How to power the wireless water leak detector

1. Powered by CR2450 battery




Title:	DS-PD1-WL-W How to reset and connect	Version:	v1.0	Date:	19/12/2019
Product:	Alarm	Page:	2 of 4		

HIKVISION

How to add wireless water leak detector

1. Click the wireless security control panel function button

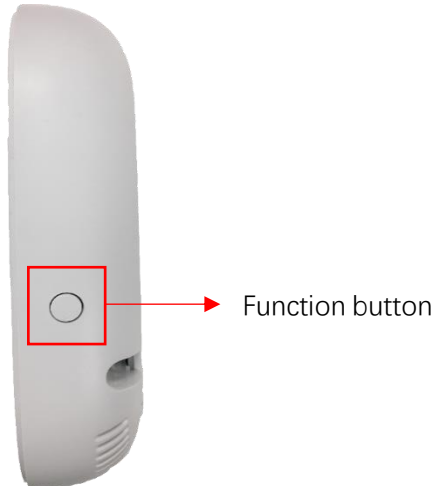


2. Power on the wireless water leak detector, then Click the learn button



3. Wireless security control panel will say 'The water leak detector is added to zone 1', the addition is successful
4. Click wireless security control panel function button again to finish the adding mode

How to reset the wireless water leak detector

1. Hold down learn button of wireless water leak detector, and then power on the device

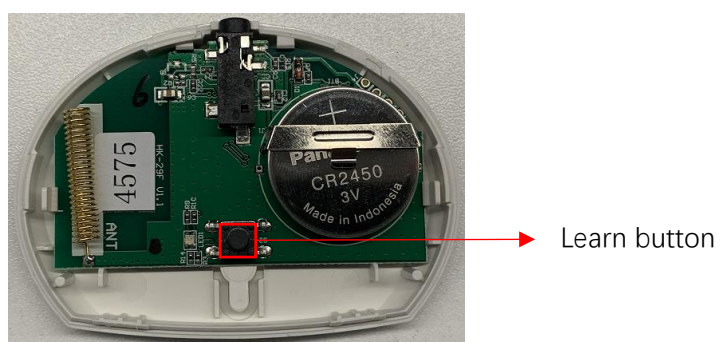

2. Hold down the button, after red light flash 3 times, means reset successfully, as below

Title:	DS-PD1-WL-W How to reset and connect	Version:	v1.0	Date:	19/12/2019
Product:	Alarm	Page:	3 of 4		

HIKVISION



Title:	DS-PD1-WL-W How to reset and connect	Version:	v1.0	Date:	19/12/2019
Product:	Alarm	Page:	4 of 4		



First Choice for Security Professionals

***HIK*VISION Technical Support**