

ACCESS CONTROL PRODUCTS

HIKVISION

MINMOE FACE RECOGNITION TERMINAL

- 4.3-inch LCD touch screen
- 2 MP wide-angle lens
- 7 Ways to unlock (FR/PIN/QR/Card/Indoor station/PC/Mobile App Hik-Connect)
- Privacy mode and settings
- Max.1,500 faces capacity, Max.3,000 cards; WiFi
- Hik-connect supported
- PoE supported (-E1 version only)
- Surface mount bracket included



DS-K1T342DWX • DS-K1T342DWX-E1 • DS-K1T342MFWX-E1

VANDAL-RESISTANT STANDALONE TERMINAL

- 2 MP camera
- 5 ways to unlock: PIN, Card, Indoor Station, Mobile app, Phone line
- Standard SIP supported
- Max. 300,000 event capacity, Max.100,000 cards
- WiFi, Bluetooth
- Surface mount bracket included
- -40°C to +70°C
- Hik-connect supported



DS-K1T502DBWX-C

NEW

VANDAL-RESISTANT STANDALONE TERMINAL

- High protective level: IP65 and IK08
- Slim and flexible design with metal
- 3,000 fingerprints(Fingerprint model only, 10,000 cards and 100,000 events storage
- Built-in card reader for M1 card
- Supports AP configuration, configuration via PC web and mobile web are available
- Supports multiple authentication types: card, fingerprint, PIN, and Bluetooth
- Hik-Connect supported



DS-K1T805MBWX, DS-K1T805MBFWX

ACCESS CONTROL 4-DOOR KIT

- 4-Door Kit
- Four DS-K1107AMK Readers with 25 M1 Cards
- DS-K2604-G Controller (ETL tested to UL294 standard)
- HCP 4-Door license



DS-K2604-KIT

FOUR-DOOR CONTROLLER

- Max Card Readers: 4 Wiegand readers or 4 RS485 readers
- With metal enclosure
- Battery pack optional
- UL294 ETL



DS-K2604-G

TWO-DOOR CONTROLLER

- Max Card Readers: 4 Wiegand readers or 4 RS485 readers
- With metal enclosure
- Battery pack optional
- UL294 ETL



DS-K2602-G

VANDAL-RESISTANT CARD READER

- RS485
- Wiegand (W26/W34)
- IP 65
- IK10



DS-K1104M

VANDAL-RESISTANT CARD READER (WITH KEYPAD)

- RS485
- Wiegand (W26/W34)
- IP 65
- IK10



DS-K1104MK

M1 CARD READER

- RS485
- Wiegand (W26/W34)
- IP 64



DS-K1107AM

M1 CARD READER (WITH KEYPAD)

- RS485
- Wiegand (W26/W34)
- IP 64



DS-K1107AMK

HID PROX CARD READER (WITH KEYPAD)

- 125KHz HID Prox
- Wiegand



DS-K170HPK

PROX HID CARD READER

- 125KHz HID Prox
- Wiegand



DS-K182HP

ACCESSORY CARD ENROLLMENT STATION

- Plug-and-play USB
- Supports various card types (M1 card and EM card)



DS-K1F100-D8E

ACCESSORY KEY FOB

- M1 Key Fob 13.56MHz
- 13.56MHz
- 25 Pack



DS-K7M102-M-25

ACCESSORY SMART CARD

- M1 1 Smart card
- 13.56MHz
- 25 Pack



IC S50-25

ACCESSORY HID PROX CLAMSHELL CARD

- 125KHz Prox Clamshell Card
- 25 Pack



DS-K7M151-P

ACCESSORY HID KEY FOB

- 125KHz Prox Key Fob
- 25 Pack



DS-K7M153-P

ACCESSORY EXIT BUTTON

- Touchless Exit Button



DS-K7P04

ACCESSORY PSU

- 12V 3A Power Supply Unit



DS-KP12V-3A

For any questions, please contact Shawn Fan: shawn.fan@hikvision.com

Connect with us: [Twitter](#) [Facebook](#) [LinkedIn](#) [YouTube](#) [Instagram](#)
www.hikvision.ca

VIDEO INTERCOM PRODUCTS

HIKVISION

MODULAR STATION MAIN MODULE

- Main outdoor station with flush mount bracket, IP65
- CMOS 2MP HD Fish eye
- IR supplement, 1 Call Button
- 2 relays for door lock control
- 4-ch Alarm input, 12VDC or standard POE



DS-KD8003-IME1/Flush

MODULAR STATION MAIN MODULE

- Main outdoor station with surface mount bracket, IP65
- CMOS 2MP HD Fish eye
- IR supplement, 1 Call Button
- 2 Relays for door lock control
- 4-ch Alarm input, 12VDC or standard POE



DS-KD8003-IME1/Surface

MODULAR STATION MAIN MODULE


- Main outdoor station only, IP65
- CMOS 2MP HD Fish eye
- IR supplement, 1 Call Button
- 2 relays for door lock control
- 4-ch alarm input, 12VDC or standard POE



DS-KD8003-IME1

MODULAR STATION SUB-MODULE

- Blank module, IP65 (needs mounting bracket)
- Flush mounting, Surface mounting
- 98.21mm x 100.21mm x 33.7mm



DS-KD-BK

MODULAR STATION SUB-MODULE

- Display module 3.5" LCD, 320*480
- 4 Buttons, contact list display
- IP65



DS-KD-DIS

MODULAR STATION SUB-MODULE

- Touch Display Module (Main module needed)
- M1 Card Reader
- Virtual keypad
- Up to 500 contact list
- Search Function
- IK08, IP65



DS-KD-TDM

MODULAR STATION SUB-MODULE


- Keypad module for modular video intercom door station
- Twelve keys for calling recipients and unlocking door with codes
- Requires main video module and mounting bracket
- IP65



DS-KD-KP

MODULAR STATION SUB-MODULE

- Card reader module for modular video intercom door station, reads M1
- 13.56 MHz cards, IP65
- Requires main video module and mounting bracket



DS-KD-M

MODULAR STATION ACCESSORY

- 3 modules flush mount bracket for modular video intercom door station (DS-KD8003-IME1 or DS-KD8003-IME2)



DS-KD-ACF3/Plastic

MODULAR STATION ACCESSORY

- 1 module surface mount bracket for modular video intercom door station (DS-KD8003-IME1 or DS-KD8003-IME2)



DS-KD-ACW1

MODULAR STATION ACCESSORY

- 2 Modules surface mount bracket for modular video intercom door station (DS-KD8003-IME1 or DS-KD8003-IME2)



DS-KD-ACW2

MODULAR STATION ACCESSORY

- 3 Modules surface mount bracket for modular video intercom door station (DS-KD8003-IME1 or DS-KD8003-IME2)



DS-KD-ACW3

MODULAR STATION ACCESSORY

- Rain shield(sun guard) for 3 modules surface mounting of the modular door station (DS-KD8003-IME1 or DS-KD8003-IME2)



DS-KABD8003-RS3

MODULAR STATION ACCESSORY

- Rain shield(sun guard) for 1 module surface mounting of the modular door station (DS-KD8003-IME1 or DS-KD8003-IME2)



DS-KABD8003-RS1

MODULAR STATION ACCESSORY

- Rain shield (sun guard) for 2 modules surface mounting of the modular door station (DS-KD8003-IME1 or DS-KD8003-IME2)



DS-KABD8003-RS2

MODULAR STATION SUB-MODULE

- Name tag module for modular video intercom door station
- Includes 6 call buttons with name tags
- Requires main video module and mounting bracket
- IP65



DS-KD-KK

MODULAR STATION ACCESSORY

- 1 module flush mount bracket for modular video intercom door station (DS-KD8003-IME1 or DS-KD8003-IME2)



DS-KD-ACF1/Plastic

MODULAR STATION ACCESSORY

- 2 modules flush mount bracket for modular video intercom door station (DS-KD8003-IME1 or DS-KD8003-IME2)



DS-KD-ACF2/Plastic

FLAGSHIP STATION

- Face Recognition Terminal, 10-inch IPS touch screen
- 7 ways to unlock (FR/PIN/QR/Card/Indoor station/PC/Phone line) - Standard SIP supported
- Max. 20,000 faces capacity
- Max.100,000 cards
- WiFi, ColorVu, Android 7.1
- IP65, IK07, Surface mount bracket and Flush mount bracket included



DS-KD9633-WBE6

OUTDOOR STATION ACCESSORY

- Keypad module for KD9633 series door station
- 15 Buttons
- 1 USB type-C
- Only connect to KD9633



DS-KDM9633-KP

OUTDOOR STATION SINGLE UNIT STATION

- Vandal Resistant Video Doorbell, 2MP, True WDR, Standard PoE
- Hik-Connect supported



DS-KB8113-IME1

OUTDOOR STATION SINGLE UNIT STATION

- CMOS 2MP HD Colorful Camera
- Aluminum alloy, 2-ch Indoor station access
- Wi-Fi 802.11b/g/n, Standard PoE/12 VDC, M1 card reading module
- RS-485-4-ch alarm input, 2 relay for door lock control
- IP65, Web interface, standard PoE
- Hik-Connect supported (C version only)



DS-KV8113-WME1

OUTDOOR STATION TWO UNITS STATION

- CMOS 2MP HD Colorful Camera, Aluminum alloy, 2-ch Indoor station access
- Wi-Fi 802.11b/g/n, Standard PoE/12 VDC, M1 card reading module
- RS-485-4-ch alarm input, 2 relay for door lock control
- IP65, Web interface, standard PoE
- Hik-Connect supported (C version only)



DS-KV8213-WME1

OUTDOOR STATION FOUR UNITS STATION

- CMOS 2MP HD Colorful Camera, Aluminum alloy, 4-ch Indoor station access
- Wi-Fi 802.11b/g/n, Standard PoE/12 VDC, M1 card reading module
- RS-485-4-ch alarm input, 2 relay for door lock control
- IP65, Web interface, standard PoE
- Hik-Connect supported (C version only)



DS-KV8413-WME1

OUTDOOR STATION ACCESSORY

- Surface mount rain (sun) protective shield for DS-KV8113/8213/8413-WME1



DS-KABV8113-RS/Surface

VANDAL-RESISTANT DOOR STATION

- 4.3-inch IPS touch screen
- IP65 & IK08
- Built-in M1 card reader
- One physical call button
- Standard PoE/12 VDC
- Hik-Connect supported



DS-KV9503-WBE1

OUTDOOR STATION SINGLE UNIT STATION

- 2 MP camera with IR supplement
- One-touch button calling design for easier calls
- Built-in card reader module
- Standard PoE power supply
- IP65 protection level
- Hik-Connect supported



DS-KV6113-WPE1

INDOOR STATION COMPACT MODEL

- 7" Touchscreen, TFT 1024*600 display resolution, standard PoE/12VDC, SD card recording, 8-ch alarm inputs, 2-ch alarm outputs
- Hik-Connect supported



DS-KH6320-WTE1

INDOOR STATION NARROW BEZEL SCREEN

- 7-inch TFT touch screen with 1024 * 600 resolution
- Easy to use without PC
- Easy wizard for quick set up
- Hik-Connect supported



DS-KH6350-WTE1

INDOOR STATION REDDOT AWARD WINNER

- 7" Touchscreen, IPS 1024*600 display resolution, standard PoE/12VDC, SD card recording, 8-ch alarm inputs, 2-ch alarm outputs, narrow bezel
- Physical unlock button
- Hik-Connect supported



DS-KH8350-WTE1

INDOOR STATION ANDROID SYSTEM

- 10" touchscreen, 1024*600 display resolution, Android V10, standard PoE/12VDC
- Built-in Hik-Connect to monitor surveillance system 3rd party Android apps supported
- Hik-Connect supported



DS-KH9510-WTE1(B)

INDOOR STATION ACCESSORY

- SECC, Silica Gel/Table Stand bracket for DS-KH6350-WTE1



DS-KABH6320-T

INDOOR STATION ACCESSORY

- Table bracket for KH6320 series indoor stations
- Compatible with KH9510 indoor station5



DS-KABH6320-T

INDOOR STATION ACCESSORY

- DS-KABH8350-T table bracket for KH8350 indoor station



DS-KABH8350-T

INDOOR STATION ACCESSORY


- DS-KABH9510-T table bracket for KH9510 indoor station



DS-KABH9510-T

INDOOR STATION 2-WIRE STATION

- Two-wire version: 7 Touch-Screen Indoor Station, 7-inch Colorful TFT LCD, Display resolution: 1024 * 600
- 10/100Mbps Ethernet, Wi-Fi 802.11b/g/n
- Two-wire interface, TF card, max 32G 8-ch alarm input, 2x alarm output, 1x485
- Hik-Connect supported



DS-KH6320-WTE2

DISTRIBUTION 6 * 2-WIRE PORTS

- 1 RJ-45 Interface, 6 Two-Wire Interface to connect DS-KD8003-IME2 or DS-KH6320-WTE2, 1 in interface to connect DS-KAD706 & DS-KAD706-S, 1 out interface to connect DS-KAD706 & DS-KAD706-S, Reset button
- Din rail mounting, 24VDC



DS-KAB706Y-P

DISTRIBUTION 6 * 2-WIRE PORTS

- 1 RJ-45 Interface, 6 Two-Wire Interface to connect DS-KAD706 & DS-KAD706-S, Reset button
- Din rail mounting, 24VDC

(MAIN DISTRIBUTION *ONLY CONNECT TO KAD706 SERIES*)



DS-KAD706Y-SP

KIT POE KIT

- POE Intercom Kit
- One DS-KD8003-IME1(Outdoor station)
- One DS-KD-ACW1(Surface mount bracket)
- One DS-KH6320-WTE1(Indoor station)
- One DS-3E010SP-E/M(Standard 4-Port PoE Switch)
- One PSU for POE Switch
- One 16GB Micro SD card
- Hik-Connect supported



DS-KIS602

KIT 2-WIRE KIT

- Two-Wire Intercom Kit
- DS-KD8003Y-IME2 x1 (Outdoor station)
- DS-KD-ACW1 x1 (Surface mount bracket)
- DS-KH6320Y-WTE2 x1 (Indoor station)
- 16GB MicroSD card x1
- Distributor x1
- PSU x1
- Hik-Connect supported



DS-KIS702Y-P

For any questions, please contact Shawn Fan: shawn.fan@hikvision.com


Connect with us: www.hikvision.com


VIDEO INTERCOM PRODUCTS

HIKVISION


KIT POE KIT • POE Intercom Kit • DS-KV6113-WPE1 x1(Outdoor station) • DS-KH6350-WTE1 x1(indoor station) • DS-KABV6113-RS x1(Rain shield) • PSU x2 • Hik-Connect supported  DS-KIS613-P	SMART WI-FI DOORBELL • 2MP Doorbell • 170° FOV • 2.4G/5G dual-band Wi-Fi • IR night vision • Support up to 256GB MicroSD card • Hikvision NVR Supported • Hik-Connect supported  DS-HD2	WI-FI DOORBELL CHIME • Compatible with DS-HD2 • Multiple Ringtones • Built-in Speaker • Dual Antennas  DS-HDWC	MODULAR STATION 2-WIRE MAIN STATION • Two-wire version: CMOS 2MP HD Colorful Camera, Fish eye (Horizontal: 180°, Vertical: 96°) • 1 Call Button, 2 relays indoor station access IR Supplement, module connection with RS-485 • 4-ch alarm input, IP65  DS-KD8003-IME2	OUTDOOR STATION ACCESSORY • Table bracket for KD9633, KIT502, KIT342  DS-DM0701BL
--	--	--	--	--

PRODUCT SCENARIO FOR A SINGLE-FAMILY HOUSEHOLD

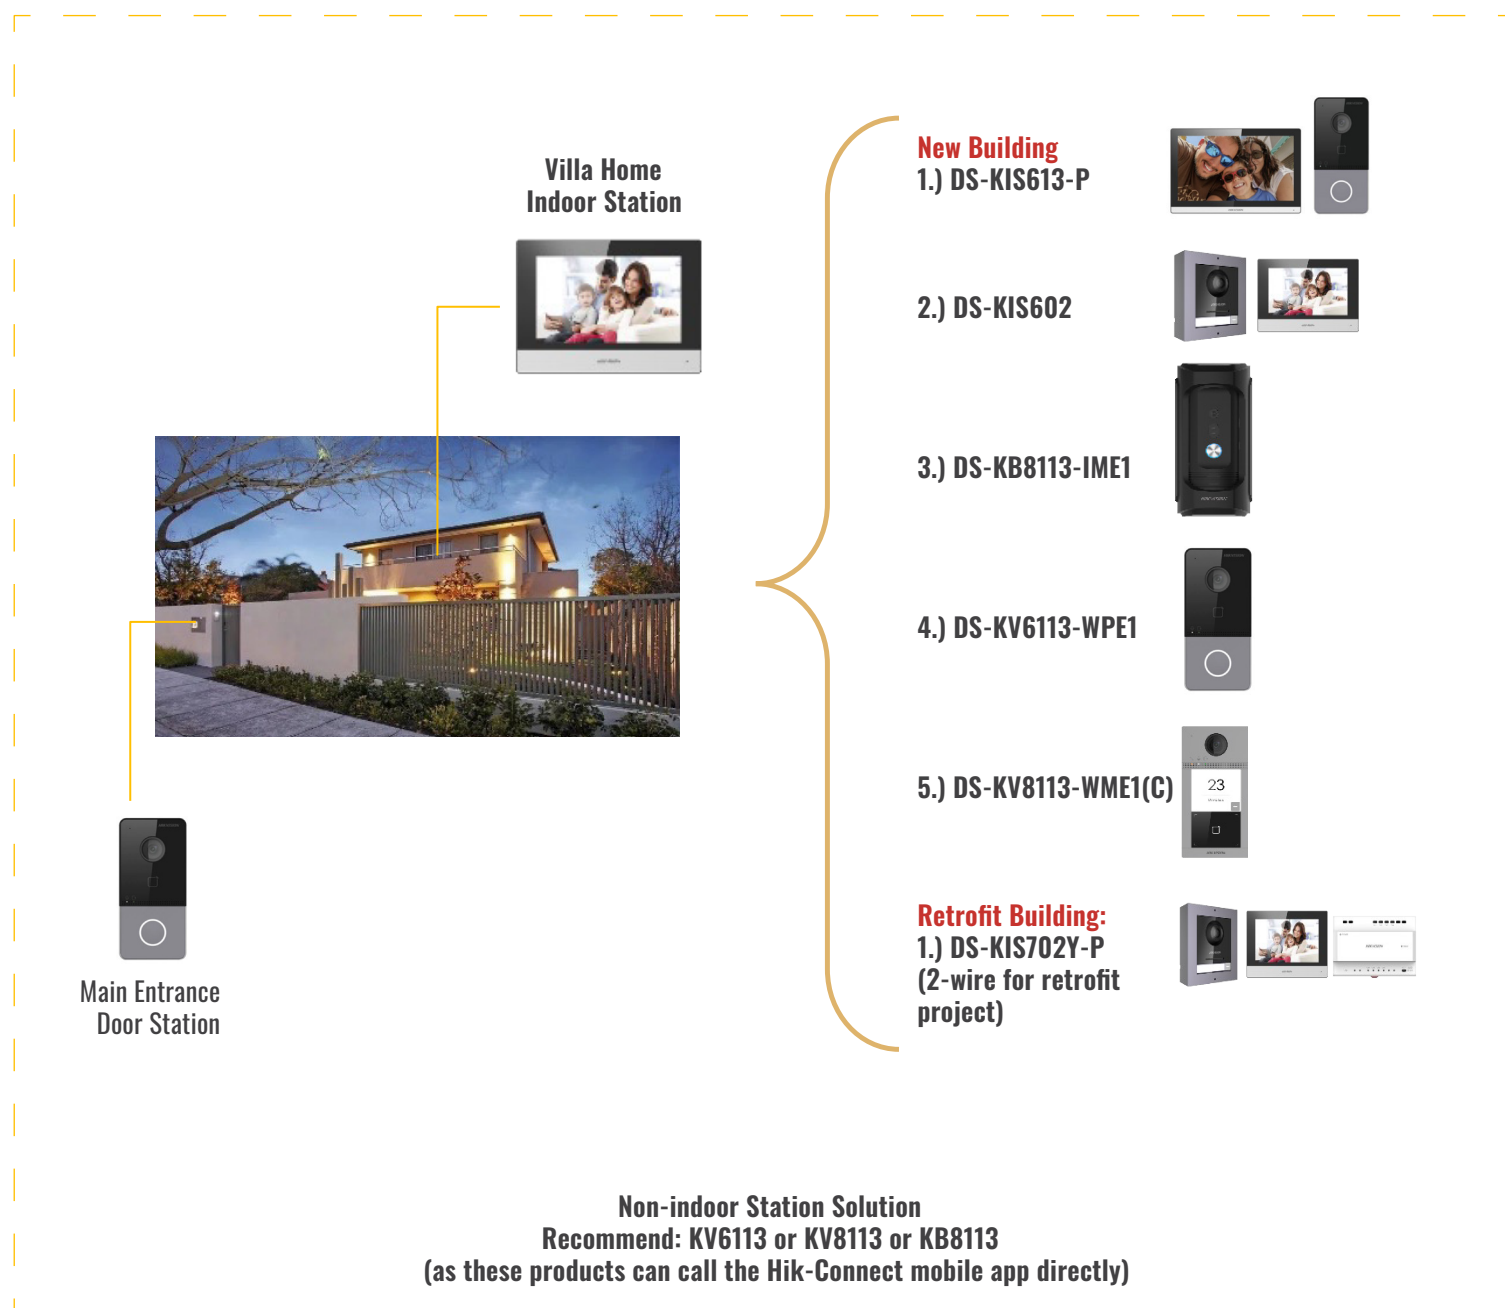


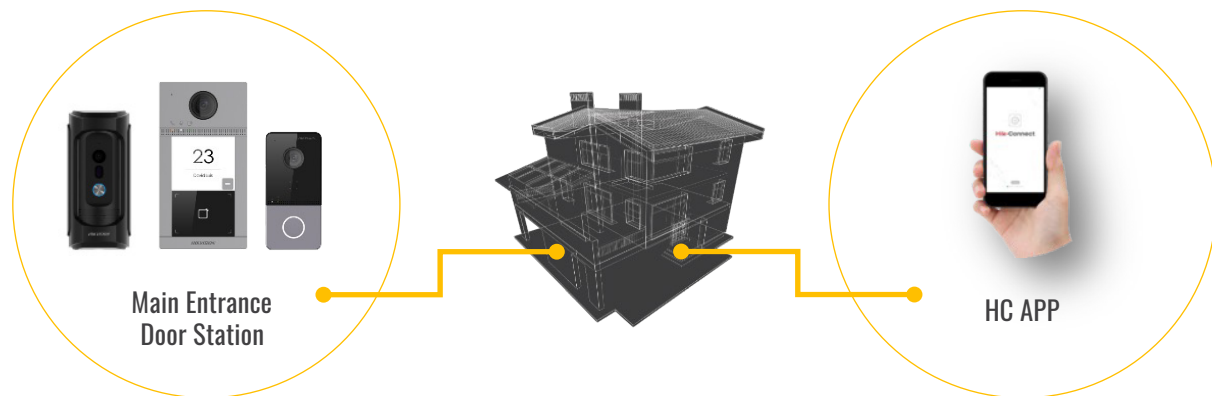

Non-indoor Station Solution
Recommend: KV6113 or KV8113 or KB8113
 (as these products can call the Hik-Connect mobile app directly)

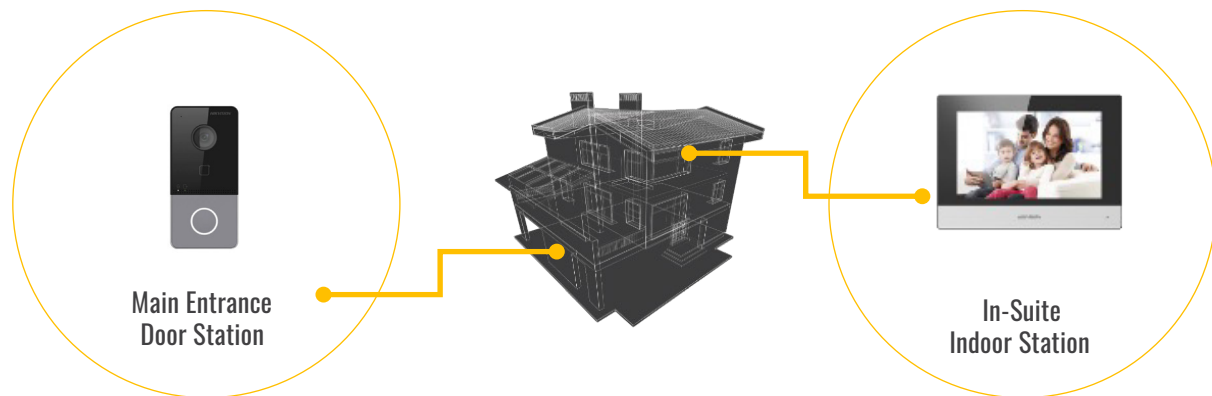

Indoor Station Solution - recommend: KIS602, KIS613
2-Wire Solution - recommend: KIS702

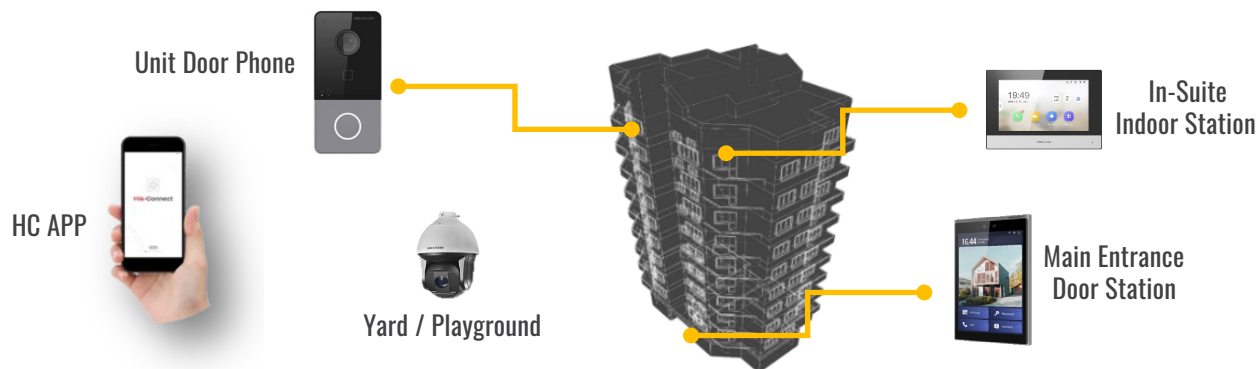

New Apartment Solution: IP Intercom solution (Network Cable)
Retrofit Apartment Solutions: 1.) Cloud-based intercom solution (wireless)
2.) 2-Wire IP solution (2-wire cable)