

Brighten Every Moment

Cut-edge LED Module

Indoor

Outdoor



Extended Splicing Angles



Energy-Saving




No Extra Cuts Needed

Cut-edge modules ensure no extra cuts or seams are needed for curved displays

Extended Splicing Angles

Splice the display outward to anywhere from 90 to 180 degrees

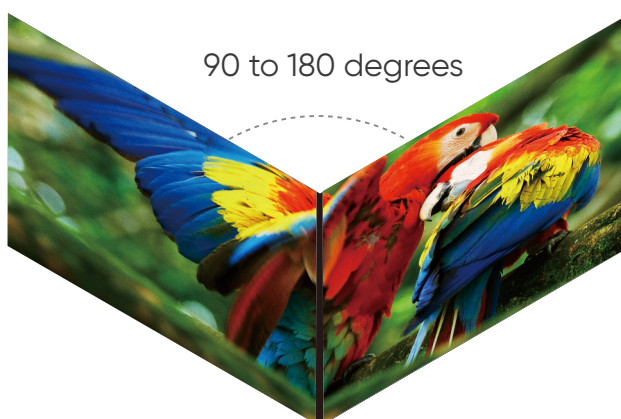




Energy-Saving Design

- PWM energy-saving driver IC with built-in current adjustment, offering 64 levels of brightness control
- Supports 4.2V, 4.5V, and 5V switching power supply

Application Scenarios

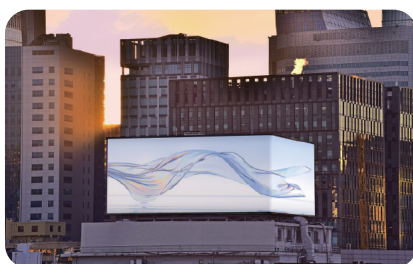

Key Spec

Indoor	DS-D41Q15CA-1PHT	DS-D41Q18CA-1PHT	DS-D41Q20CA-1PHT	DS-D41Q25CA-1PHT
Pixel Pitch	P1.53	P1.86	P2.0	P2.5
Module Size	320*160mm			
Lamp Size	1212	1515	1515	1515
Refresh Rate (Hz)	3840HZ			
Brightness (nits)	500-550nits			
Resolution	208 * 104 resolution	172 * 86 resolution	160 * 80 resolution	128 * 64 resolution

Outdoor	DS-D4340CA-1PHT	DS-D4350CA-1PHT	DS-D4360CA-1PHT	DS-D4380CA-1PHT
Pixel Pitch	P4.0	P5.0	P6.6	P8.0
Module Size	160*160mm			
Lamp Size	1921			
Refresh Rate (Hz)	3840HZ			
Brightness (nits)	4500 nits			
Resolution	40 * 40 resolution	32 * 32 resolution	24 * 24 resolution	20 * 20 resolution



Hikvision

HikvisionHQ

HikvisionHQ

Hikvision Corporate Channel

hikvisionoverseas

Hikvision Commercial Display

HikvisionOverseas

HIKVISION