

Hikvision PDS Products



Efficient
Cabling



Reliable
UPS



Versatile
Monitors



Hikvision PDS Products Family

Hikvision provides cutting-edge video security systems and a range of supplementary security solutions, including **Premises Distribution System (PDS) products** for efficient data transmission, reliable **UPS** units for power backup, and high-quality **Monitors** for monitoring, office work, gaming, and other applications.

PDS Products



 Network Cables



 Coaxial Cables



 Path Cord, Balun, Plug



 Alarm Cables



 PDS Accessories

UPS



 Backup Type UPS




 Mini DC UPS

Monitors



 SOHO and Professional Series

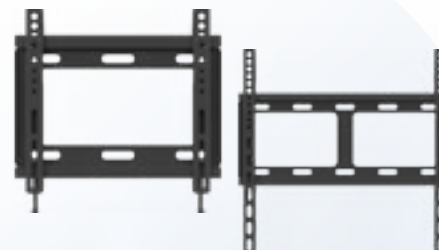

 Wall-Mounted Bracket

PDS

(Premises Distribution System)

Hikvision's PDS product lines provide a diverse range of offerings to support a wide variety of IP applications, catering to the specific needs of modern networking requirements.



Buildings



Campus



Offices

Network Cables

Flame-retardant with multiple qualifications:
CPR Eca/CPR Cca CPR Fca CPR Eca/Fca

Low smoke zero halogen cables

Patch Cord

PDS Accessories

RJ45 plug

Patch panel

Cable management

Balun

Faceplate

Keystone jack

Coaxial Cables

Mini RG59 + 3-Power cables

RG59 + 2-Power cables

RG59 cables



Network Cables

Pure Copper

Superior copper content, tight tolerances, and consistent quality

Wire diameters available to meet mainstream market demands: 23, 24, 25 AWG.

Wide Selection

Diverse categories such as Cat5e, Cat6, and Cat6a, all meeting industry standards

Versatile Applications

Fire safety certifications

Indoor and outdoor models

LSZH (Low Smoke Zero Halogen) options



Path Cord




No need for an additional crystal connector



Convenient and easy to carry



Pure copper

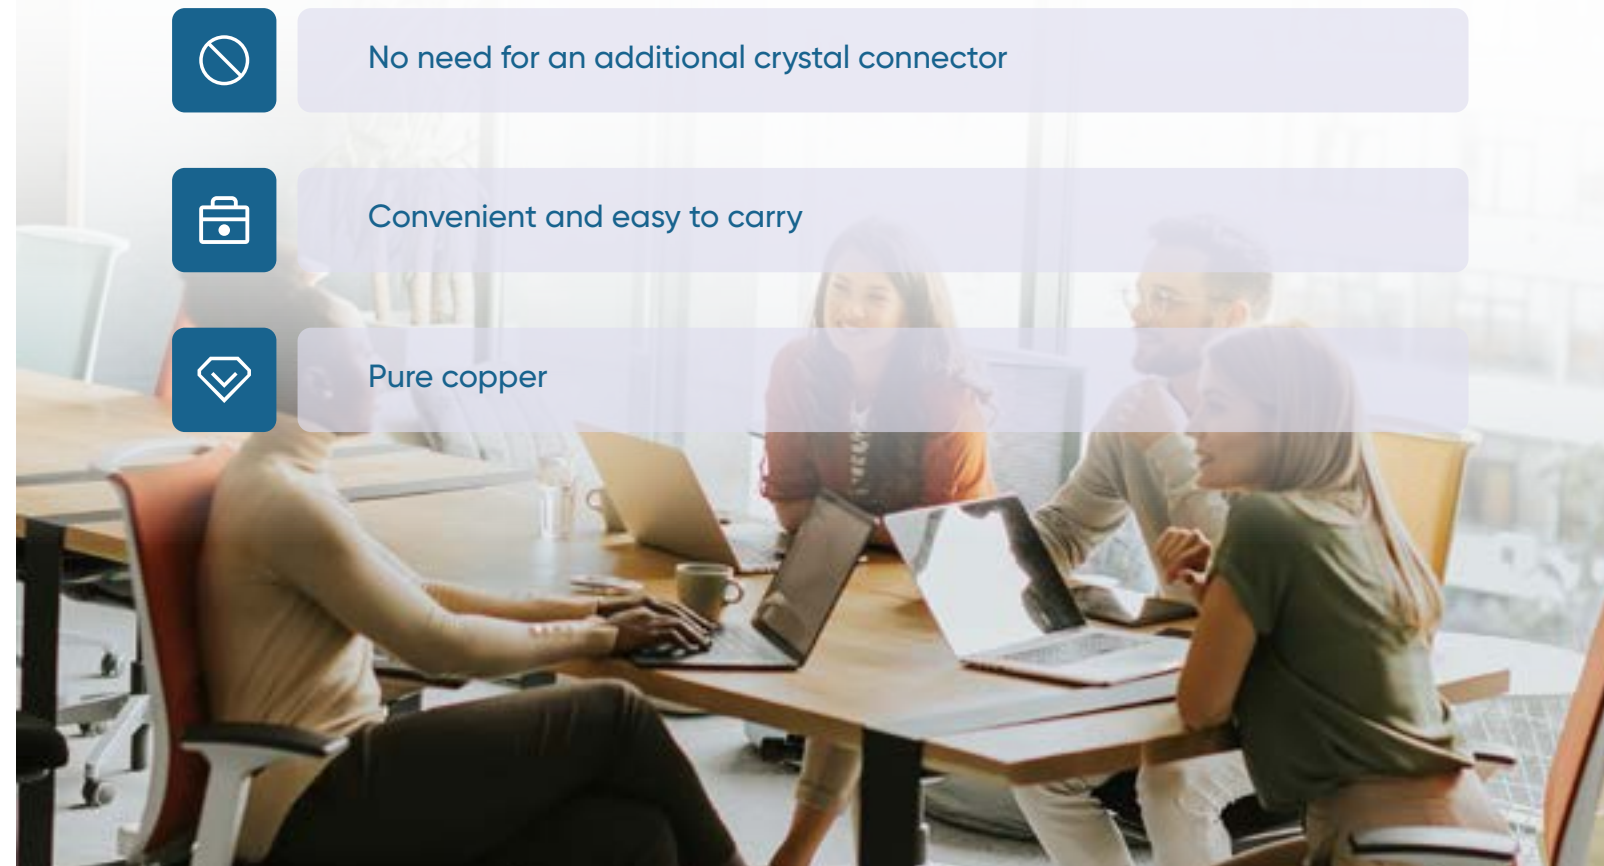

Network cables - Cat5e				
Product Category	(CPR Fca) No Flame Retardant	(CPR Fca) No Flame Retardant	Single Cable Flame Retardant	Bunched Cable Flame Retardant
Model	DS-1LN5EU-SC0	DS-1LN5EUEC0	DS-1LN5E-E/E	DS-1LN5E-S
Image				
Conductor Material	Solid Copper	Solid Copper	Solid Copper	Solid Copper
Type	Cat5e	Cat5e	Cat5e	Cat5e
Diameter	24 AWG 0.50 mm	25 AWG 0.45 mm	25 AWG 0.45 mm	24 AWG 0.50 mm
Structure	U/UTP	U/UTP	U/UTP	U/UTP
Sheath Material	PVC	PVC	PVC	PVC
Length (m)	305	305	305	305
Flame Retardant Certificate	CPR Eca	CPR Fca	UL CMX	UL CM CPR Eca

Network cables - Cat5e				
Product Category	(CPR Fca) Outdoor with PE Sheath	(CPR Fca) Outdoor with PE Sheath	(Low smoke zero halogen) (CPR Eca/CPR Cca)	(Low smoke zero halogen) (CPR Eca/CPR Cca)
Model	DS-1LN5EO-UU/E	DS-1LN5EOPSPE	DS-1LN5EUSL5	DS-1LN5EPSL3
Image				
Conductor Material	Solid Copper	Solid Copper	Solid Copper	Solid Copper
Type	Cat5e	Cat5e	Cat5e	Cat5e
Diameter	24 AWG 0.50 mm	24 AWG 0.50 mm	24 AWG 0.50 mm	24 AWG 0.50 mm
Structure	U/UTP	F/UTP	U/UTP	F/UTP
Sheath Material	PE	PE	LSZH	LSZH
Length (m)	305	305	305	305
Flame Retardant Certificate	CPR Fca	CPR Fca	CPR Eca	CPR Cca s1b d1 a1

Product Category	(CPR Eca/Fca) Copper Clad Aluminium	(CPR Eca/Fca) Copper Clad Aluminium	(CPR Fca) No Flame Retardant	(CPR Fca) No Flame Retardant	(CPR Fca) No Flame Retardant	(CPR Fca) No Flame Retardant
Model	DS-1LN6U-W/CCA	DS-1LN6UU/CCA	DS-1LN6U-G	DS-1LN6U-SC0	DS-1LN6UEC0	DS-1LN6UTC0
Image						
Conductor Material	CCA	CCA	Solid Copper	Solid Copper	Solid Copper	Solid Copper
Type	Cat6	Cat6	Cat6	Cat6	Cat6	Cat6
Diameter	23 AWG 0.585 mm	23 AWG 0.57 mm	23 AWG 0.55 mm	23 AWG 0.55 mm	24 AWG 0.53 mm	24 AWG 0.515 mm
Structure	U/UTP	U/UTP	U/UTP	U/UTP	U/UTP	U/UTP
Sheath Material	PVC	PVC	PVC	PVC	PVC	PVC
Length (m)	305	305	305	305	305	305
Flame Retardant Certificate	CPR Eca	CPR Fca	CPR Eca	CPR Eca	CPR Fca	CPR Eca

Product Category	(CPR Fca) No Flame Retardant	Bunched Cable Flame Retardant	Bunched Cable Flame Retardant	(CPR Fca) Outdoor with PE Sheath	(CPR Fca) Outdoor with PE Sheath
Model	DS-1LN6UZC0	DS-1LN6-UU	DS-1LN6-UE-W	DS-1LN6OPSPE	DS-1LN6OUSPE
Image					
Conductor Material	Solid Copper	Solid Copper	Solid Copper	Solid Copper	Solid Copper
Type	Cat6	Cat6	Cat6	Cat6	Cat6
Diameter	24 AWG 0.5 mm	23 AWG 0.565 mm	24 AWG 0.53 mm	23 AWG 0.565 mm	23 AWG 0.55 mm
Structure	U/UTP	U/UTP	U/UTP	F/UTP	U/UTP
Sheath Material	PVC	PVC	PVC	PE	PE
Length (m)	305	305	305	305	305
Flame Retardant Certificate	CPR Fca	UL CM CPR Eca	UL CM CPR Fca	CPR Fca	CPR Eca

Network cables - Cat6					
Product Category	(CPR Fca) Outdoor with PE Sheath	(CPR Fca) Outdoor with PE Sheath	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)
Model	DS-1LN6OUTPE	DS-1LN6AUSPE	DS-1LN6USL5	DS-1LN6USL3	DS-1LN6UEL5
Image					
Conductor Material	Solid Copper	Solid Copper	Solid Copper	Solid Copper	Solid Copper
Type	Cat6	Cat6A	Cat6	Cat6	Cat6
Diameter	24 AWG 0.515 mm	23 AWG 0.56 mm	23 AWG 0.565 mm	23 AWG 0.565 mm	24 AWG 0.53 mm
Structure	U/UTP	U/UTP	U/UTP	U/UTP	U/UTP
Sheath Material	PE	PE	LSZH	LSZH	LSZH
Length (m)	305	305	305	305	305
Flame Retardant Certificate	CPR Fca	CPR Fca	CPR Fca	CPR Cca s1b d1 a1	CPR Fca

Network cables - Cat6					
Product Category	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)	(Low Smoke Zero Halogen) (CPR Eca/CPR Cca)
Model	DS-1LN6UEL3	DS-1LN6AUSL5	DS-1LN6APSL4	DS-1LN6APSL3	DS-1LN6AFPSL4
Image					
Conductor Material	Solid Copper	Solid Copper	Solid Copper	Solid Copper	Solid Copper
Type	Cat6	Cat6A	Cat6A	Cat6A	Cat6A
Diameter	24 AWG 0.53 mm	23 AWG 0.56 mm	23 AWG 0.56 mm	23 AWG 0.56 mm	23 AWG 0.56 mm
Structure	U/UTP	U/UTP	U/UTP	U/UTP	S/FTP
Sheath Material	LSZH	LSZH	LSZH	LSZH	LSZH
Length (m)	305	305	305	305	305
Flame Retardant Certificate	CPR Cca s1b d1 a1	CPR Fca	CPR Dca s1 d2 a1	CPR Cca s1 d1 a1	CPR Dca s2 d2 a1

Product Showcase

Network cables - Path cord

Model	DS-1NP6UEC0
Image	
Type	Cat6
Size	0.50 ± 0.005 mm
Structure	U/UTP
Length (m)	0.5, 1, 2, 3, 5, 10
Sheath Material	PVC
Gold Plating	30 U

Coaxial Cables

Coaxial cables provide reliable connectivity and deliver quality images. Specifically, 3+1 and 2+1 cables enable simultaneous transmission of video signals and power supplies.



-  Optimal video transmission capability
-  Guaranteed genuine quality with stable craftsmanship
-  Versatile options with single coaxial cable and 2+1/3+1 configurations to suit various requirements

Alarm Cables

Hikvision alarm cables are essential for connecting security devices and transmitting alarm signals. They are widely used for linking door magnets, infrared detectors, smoke alarms, and other vital security equipment.





Versatile applications in diverse scenarios

CPR Eca flame retardant certification





Low smoke halogen-free

Coaxial Cables				
Product Category	3+1 Siamese Cable	2+1 Siamese Cable		1-core Coaxial Cable
Model	DS-1LH1SCAM593C	DS-1LH1SCAM592C	DS-1LH1S2C-20	DS-1LC1SSA
Image				
Description	Mini RG59 Cable, CL2 26 AWG, 3 * Power Cable, PVC, Black	Mini RG59 Cable, CU, 26 AWG, 2 * Power Cable (0.2), PVC, Black	Mini RG59 Cable, CU, 28 AWG, 2 * Power Cable, 24 AWG, PVC, Black	RG59 Cable, CCS, 20 AWG, 60% Braiding Density, PVC, Black
Sheath Material	PVC	PVC	PVC	PVC
Length (m)	180	90/180	20	305

Alarm Cables							
Model	DS-1AC2A2BPL1	DS-1AC2B4APL1	DS-1AC2B6APL1	DS-1AC2C4APL1	DS-1AC2C6APL1	DS-1AC4APL1	DS-1AC6APL1
Image							
Description	2+2 cores: 2 * 0.22 mm² (7-strand) + 2 * 0.50 mm² (16-strand)	2+4 cores: 2 * 0.5 mm² (16-strand) + 4 * 0.22 mm² (7-strand)	2+6 cores: 2*0.5 mm² (16-strand) + 6*0.22 mm² (7-strand)	2+4 cores: 2 * 0.75 mm² (24-strand) + 4 * 0.22 mm² (7-strand)	2+6 cores: 2 * 0.75 mm² (24-strand) + 6 * 0.22 mm² (7-strand)	4-core: 4 * 0.22 mm² (7-strand)	6-core: 6 * 0.22 mm² (7-strand)
Color and Sheath	Blue, LSZH	Blue, LSZH	Blue, LSZH	Blue, LSZH	Blue, LSZH	Blue, LSZH	Blue, LSZH
Package	Color, 305-m/Package	Color, 305-m/Package	Color, 305-m/Package	Color, 305-m/Package	Color, 305-m/Package	Color, 305-m/Package	Color, 305-m/Package
Flame Retardant Certificate	CPR Eca	CPR Eca	CPR Eca	CPR Eca	CPR Eca	CPR Eca	CPR Eca

PDS Accessories

Faceplates

Available in two product types: single-port and dual-port



Keystone Jacks

Available in a range of types, including shielded, unshielded, 90°, 180°, punch down, and tool-less



Patch Panel

Available in various products: with or without keystone jacks, shielded, and unshielded types



Cable Management

Available in 1U, 12-slot, 24-slot types



Balun

Available in 1U, 12-slot, 24-slot types



Cat5e Cat6



Cat5e and cat6 plugs make it quick and easy to terminate or join cables together

Product Showcase

Faceplates

Model	DS-1FPA1	DS-1FPA2
Image		
Type	1-Port	2-Port
Flame Retardant Certificate	UL94V-0 Flame Retardant	UL94V-0 Flame Retardant
Package	20 Pcs/Box	20 Pcs/Box

Cable Management

Model	DS-1CM1U12	DS-1CM1U24
Image		
Type	12-Slot	24-Slot
Size	1U	1U
Package	1/Box	1/Box

Patch Panels

Model	DS-1CP0P24-1U	DS-1CP0U24-1U	DS-1CP6U24-1U
Image			
Type	24-Port	24-Port	24-Port
Type	Blank	Blank	Cat6
Shield	Shielded	Unshielded	Unshielded
Package	1/Box	1/Box	1/Box

Balun

Model	DS-1H18S/E(C)
Image	
Description	Single-Channel Passive HD Video Twisted Pair Transmitter

Product Showcase

Keystone Jacks

Model	DS-1CK6U90T	DS-1CK6U90N	DS-1CK6U180T	DS-1CK6U180N	DS-1CK6P180N	DS-1CK6AU180T	DS-1CK6AP180N
Image							
Angel	90°	90°	180°	180°	180°	180°	180°
Type	Cat6	Cat6	Cat6	Cat6	Cat6	Cat6a	Cat6a
Shield	Unshielded	Unshielded	Unshielded	Unshielded	Shielded	Unshielded	Shielded
Tool	Punch Down	Tool-Less	Punch Down	Tool-Less	Tool-Less	Punch Down	Tool-Less
Package	50 Pcs/Box	50 Pcs/Box	50 Pcs/Box	50 Pcs/Box	50 Pcs/Box	50 Pcs/Box	50 Pcs/Box

Plugs

Model	DS-1M5EUA-15/30U	DS-1M6UA-15/30U
Image		
Type	Cat5e	Cat6
Gold Plating	15/30U	15/30U
Shield	Unshielded	Unshielded
Package	100 Pcs/Box	100 Pcs/Box

Cabinets

Model	DS-XS6404-S/B	DS-XS6406-S/B	DS-XS6409-S/B	DS-XS6412-S/B	DS-XSPB04-S/B
Image					
Type	4U	6U	9U	12U	N/A
Size	600*450*281 mm, Load Bearing: 40 kg	6U, 600*450*368 mm, Load Bearing: 40 kg	600*450*501 mm, Load Bearing: 40 kg	600*450*635 mm, Load Bearing: 40 kg	Standard Tray for 4/6/9/12U

UPS

Hikvision provides reliable **UPS** units that offer seamless power backup, safeguarding against potential out-ages and ensuring uninterrupted system operations.

Computer power supply for home or offices

Power supply for switches

Power supply for security systems

Power supply for routers

Backup Type UPS

Adaptability

Automatically adjust for voltage fluctuations in the power grid to maintain stable output

Safety

Immediately switch to backup power during mains outage to sustain equipment operation

Reliability

Feature multiple circuit protection mechanisms (overload, short circuit, overvoltage, under voltage) to protect connected devices



600VA/360W
1000VA/600W
1200VA/720W
2000VA/1200W
3000VA/1800W

Stability

Prevent equipment damage or data loss from unstable grid voltages, ensuring continuous operation

Mini DC UPS

Convenient

DC power output supports devices like routers

Efficient

High-performance lithium battery for long backup power



Practical

Compact and light-weight, ideal for office or home desktop use

Reliable

Provide overload, overvoltage, and overheat protections for safe operation

Product Showcase

Backup series UPS

Model	DS-UPS600	DS-UPS1000	DS-UPS1200	DS-UPS2000	DS-UPS3000
Image					
Capacity	600 VA/360 W	1000 VA/600 W	1200 VA/720 W	2000 VA/1200 W	3000 VA/1800 W
Output Voltage	110 V/220 V	110 V/220 V	110 V/220 V	110 V/220 V	110 V/220 V
Battery Capacity	12 V/7 Ah	12 V/9 Ah	12 V/7 Ah	12 V/9 Ah	12 V/9 Ah
Battery Number	1	1	2	2	4

DC UPS

Model	DS-UPS18D-Z
Image	
Capacity	18 W, 8000 mAh
Output	USB 5 V 2 A, DC 5 V 2 A, DC 9 V 1 A, DC 12 V 1 A, PoE 15 V 0.8 A/PoE 24 V 0.5 A

Monitors

Hikvision has SOHO and professional monitors for a variety of applications. Products include 4K monitors and 7X24 monitors for the security industry.



SOHO and Professional Series



Wide viewing angle



Super narrow bezel



Various resolution option



VESA mounting standard



Low blue light design for eye care



Multiple interface options

SOHO and Professional Series

Industrial grade panel life 50,000~60,000 hours



- Multimedia
- Built-in speaker
- 3D noise reduction
- VESA mounting standard
- Max 7/24 operations



- Multimedia
- Built-in speaker
- 4K resolution
- VESA mounting standard
- Max 7/24 operations

Product Showcase

SOHO Monitor

Model	DS-D5019S0-1P0	DS-D5022F2-1V1	DS-D5022F2-2V1	DS-D5022F2-1V2	DS-D5022F2-2V2	DS-D5022F2-1P2
Image						
Product Descriptions	18.5" 1366*768, HDMI/VGA input, view angle: 178°/178°, plastic casing, ERP level A, VESA, base bracket included, 7*24h	21.5", VA, HDMI/VGA input, 75Hz, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	21.5", VA, HDMI/VGA input, 75Hz, "V" shaped base, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	21.5", VA, HDMI/VGA input, Audio Output, 100Hz, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	21.5", VA, HDMI/VGA input, Audio Output, 100Hz, "V" shaped base, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	21.5", IPS, HDMI/VGA input, Audio output, 100Hz, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms
7x24H	yes	no	no	no	no	no
Size	18.5"	21.5"	21.5"	21.5"	21.5"	21.5"
Resolution	1366*768	1080P	1080P	1080P	1080P	1080P
OC Type	IPS	VA	VA	VA	VA	IPS
Max Refresh Rate (HZ)	60	75	75	100	100	100
Visual Angle	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
Response Time (ms)	6.5	6.5	6.5	6.5	6.5	6.5
Brightness (nits)	200	250	250	250	250	250
Interface	HDMI, VGA, Audio IN	HDMI, VGA	HDMI, VGA	HDMI, VGA, Audio out	HDMI, VGA, Audio out	HDMI, VGA, Audio out
Speaker	NO	NO	NO	NO	NO	NO

SOHO Monitor						
Model	DS-D5022F2-2P2A	DS-D5022F2-1V2S	DS-D5024F2-AP2	DS-D5024F2-BV2S	DS-D5027F2-1P2	DS-D5027F2-2P2
Image						
Product Descriptions	21.5", IPS, HDMI/VGA input, Audio output, 100Hz, "V" shaped base, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	21.5", VA,HDMI/VGA input, Audio Input, 100Hz, Speaker included, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	23.8" 1080P, HDMI/VGA input, Audio output, IPS technology, view angle:178°/178°, plastic casing, VESA, base bracket included, 100Hz refresh rate, 12V DC	23.8" 1080P, HDMI/VGA input, Audio input, build-in speaker, view angle:178°/178°, plastic casing, VESA, base bracket included, 100 Hz refresh rate, 12V DC	27", IPS, HDMI/VGA input 100HZ, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms	27", IPS, HDMI/VGA input, 100Hz, "V" shaped base, Brightness 250nits, Contrast ratio 1000:1, Response time 6.5ms
7x24H	no	no	no	no	no	no
Size	21.5"	21.5"	23.8"	23.8"	27"	27"
Resolution	1080P	1080P	1080P	1080P	1080P	1080P
OC Type	IPS	VA	IPS	VA	IPS	IPS
Max Refresh Rate (HZ)	100	100	100	100	100	100
Visual Angle	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
Response Time (ms)	6.5	6.5	6.5	6.5	6.5	6.5
Brightness (nits)	200	250	250	250	300	300
Interface	HDMI, VGA, Audio out	HDMI, VGA, Audio in	HDMI, VGA, Audio out	HDMI, VGA, Audio in	HDMI, VGA	HDMI, VGA
Speaker	NO	YES	NO	YES	NO	NO

SOHO Monitor		Professional Monitor				
Model	DS-D5032F3-1V0S	Model	DS-D5222F2-1V1S	DS-D5224F2-1V1S	DS-D5227U3-1P0	DS-D5232F2-1V1S
Image		Image				
Product Descriptions	32", VA, HDMI/VGA input, speaker included, Brightness 300nits, Contrast ratio 4000:1, Response time 8ms	Product Descriptions	21.5" 1080P, HDMI/VGA input, BNC in, build-in speaker, USB 2.0, view angle:178°/178°, plastic casing, 100~240V AC input, VESA, base bracket included, 7*24h	23.8" 1080P, HDMI/VGA input, BNC in, build-in speaker, view angle:170°/160°, plastic casing, VESA, base bracket included, 7*24h	27" 4K, DP, HDMI input, audio input, build-in speaker, view angle 178°/178°, plastic casing, VESA, 7*24h	31.5" 1080P, HDMI/DVI/VGA/BNC input, BNC output, build-in speaker, USB, view angle:178°/178°, plastic casing, VESA, 7*24h
7x24H	yes	7x24H	yes	yes	yes	yes
Size	31.5"	Size	21.5"	23.8"	27"	31.5"
Resolution	1080P	Resolution	1080P	1080P	4K	1080P
OC Type	VA	OC Type	VA	VA	IPS	VA
Max Refresh Rate (HZ)	60	Max Refresh Rate (HZ)	75	75	60	60
Visual Angle	178°/178°	Visual Angle	178°/178°	178°/178°	178°/178°	178°/178°
Response Time (ms)	8	Response Time (ms)	6.5	6.5	6.5	8
Brightness (nits)	300	Brightness (nits)	250	250	300	350
Interface	HDMI, VGA, Audio in	Interface	HDMI, VGA, USB, Audio in	HDMI, VGA, BNC, USB	HDMI*2, DP, audio out	HDMI, VGA, BNC in, BNC out, DVI, USB, RS232 in, RS232 out
Speaker	YES	Speaker	YES	YES	NO	YES

Product Showcase

4K Monitor

Model	DS-D5043F3-1V0	DS-D5043U3-1V0	DS-D5050U3-1V0	DS-D5055U3-1V0	DS-D5065UC-C
Image					
Product Descriptions	43" 1080P, HDMI/VGA input, USB, Build in speaker, view angle:178°/178°, 300cd/m², plastic casing, VESA, base bracket included	43" 4K, HDMI*3 USB2.0, build-in speaker, view angle 178°/178°, plastic casing, VESA	50" 4K, HDMI*1, VGA*1, USB*1, build-in speaker, view angle 178°/178°, plastic casing, VESA	55" 4K, HDMI*3 build-in speaker, view angle 178°/178°, plastic casing, VESA	65" 4K, HDMI*2, VGA*1, USB*1, Audio in, build-in speaker, view angle 178°/178°, plastic casing, VESA, 7*24h
7x24H	no	no	no	no	yes
Size	43"	43"	50"	55"	65"
Resolution	1080P	4K	4K	4K	4K
OC Type	VA	VA	VA	VA	IPS
Max Refresh Rate (HZ)	60	60	60	60	60
Visual Angle	178°/178°	178°/178°	178°/178°	178°/178°	178°/178°
Response Time (ms)	6.5	6.5	6.5	6.5	8
Brightness (nits)	300	300	300	300	350
Interface	HDMI, VGA, USB	HDMI, VGA, Audio in	HDMI, VGA, USB	HDMI	HDMI, VGA, USB, Audio in, RS232 in
Speaker	YES	YES	YES	YES	YES

Wall mount

Model	DS-DM1940W	DS-DM4255W
Image		
Product Descriptions	Wall-mounted bracket, Dimension 250 mm × 220 mm × 25mm, VESA 200 (H) mm × 200 (V) mm, recommended for small size monitor (≤40-inch)	Wall-mounted bracket, Dimension 450 mm × 420 mm × 25mm, VESA 400 (H) mm × 400 (V) mm, recommended for larger size monitor (>40-inch)



www.hikvision.com
support@hikvision.com



Hik-Partner Pro
Scan and download
the app

HIKVISION®