



**HIKVISION®**

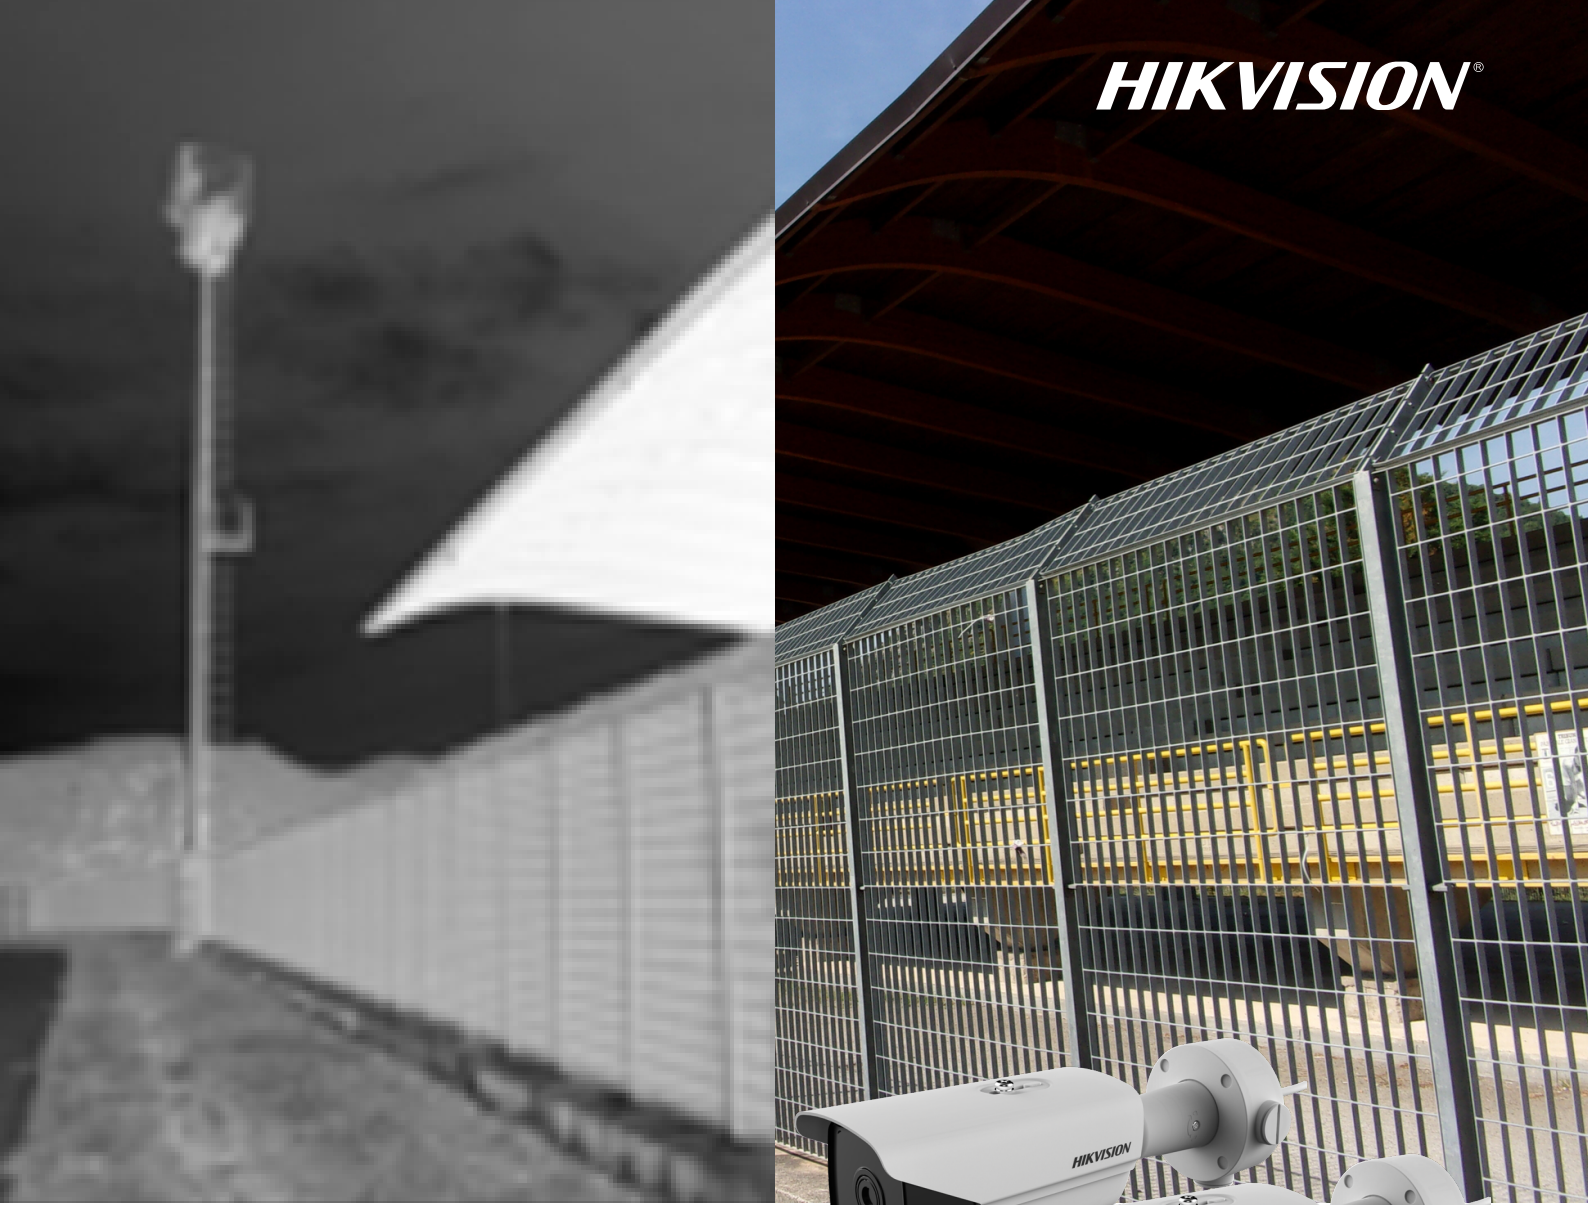

# PERIMETER PROTECTION IN ALL WEATHERS

## Performance Series Thermal Bullet Cameras

### KEY FEATURES



**Video Content Analytics**  
with deep learning  
algorithms to reduce false  
alarms



**Temperature exception alarm**  
with visualized smart warning



**Vigilant smoking detection**  
helps to detect smoking  
behaviors in the first place



**Picture-in-picture preview**  
saves efforts on switching  
between optical and thermal  
channels

## APPLICATION SCENARIOS



Villas



Communities



Car Dealerships



Factories



Parking Lots



Entrances



Warehouses



Substations

## PARAMETERS



DS-2TD2117-3/V1

DS-2TD2117-6/V1

### Performance Series Thermal Bullet Cameras

- Resolution:
  - Thermal: 160 x 120 @ 25 fps, 17  $\mu$ m (the resolution of the output image is 320 x 240)
  - Optical: 1920 x 1080 (DS-2TD2617 series only)
- Focal length:
  - Thermal: 3 mm / 6 mm
  - Optical: 4 mm / 6 mm (DS-2TD2617 series only)
- Hikvision sensor, NETD < 40 mk
- Video content analytics: Line crossing / Intrusion detection / Region entrance / Region exiting
- Temperature exception alarm (temperature measuring range: -20° to 150° C, accuracy:  $\pm$ 8° C)
- Smoking detection
- Supports bi-spectrum image fusion, picture-in-picture preview (DS-2TD2617 series only)
- Working temperature: -40° to 65° C (-40° to 149° F)
- IP67 ingress protection



DS-2TD2617-3/V1

DS-2TD2617-6/V1

### Performance Series Thermal Bi-spectrum Bullet Camera



Headquarters  
No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

