

HIKVISION

Wireless Bridges

*Bridging Efficiency
with Seamless Wireless Connectivity*



Why need wireless bridges?



Long range

Cost-effective alternative to fiber
in rural areas



Flexible networking

Enable connection in hard-to-wire places
like forests and construction sites



Time & cost saving

Reliable in moving environments
like elevator shafts

What Hikvision's wireless bridges can offer?

Auto pairing



100%
plug and play experience

No configuration needed

Enjoy quick installation and instant
connection within seconds

Standard PoE input & output

*Simplify your installation
right away*

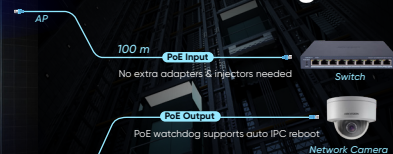

Standard PoE equipment saves time
and reduces costs

Stable long-distance signal transmission





Professional outdoor design



IP55 weatherproof enclosures



-30° C to 70° C
wide working temperature



Outdoor UV
protection

Auto channel selection for stability



Elevator A



Elevator B



Elevator C

Elevator Series



DS-3WFOBC-2NT(B)

- 200 m, 2.4 GHz, 1 FE
- Super cost-effective



DS-3WFOEC-2NT

- 500 m, 2.4 GHz, 2 FE
- 12-24 V passive PoE



DS-3WFOEC-5ACT(B)

- 500 m, 5 GHz, 2 FE
- **Standard PoE Input & Output**

Universal Series



DS-3WFOFA-2N/O

- 1 km, 2.4 GHz, 2 FE
- 65° antenna



DS-3WFOFC-2N/O

- 1 km, 2.4 GHz, 2 FE
- 35° antenna



DS-3WF1000-EI-2N (Kit)
DS-3WF1000S-EI-2N (Single)

- 1 km, 2.4 GHz, 2 FE



DS-3WFOFA-5AC/O

- 1 km, 5 GHz, 2 GE
- 360° antenna
- **Standard PoE Input**



DS-3WF3000-EI-5AC/P (Kit)
DS-3WF3000S-EI-5AC/P (Single)

- 3 km, 5 GHz, 2 FE
- **Standard PoE Input & Output**



DS-3WF02C-5AC/O

- 5 km, 5 GHz, 2 GE



DS-3WF02-5AC/D

- 5 km, 5 GHz, 2 FE
- **Standard PoE Input & Output**



DS-3WF03C-5AC/O

- 15 km, 5 GHz, 2 GE



www.hikvision.com
support@hikvision.com



Distributor Address