

- Clearer imaging
- Shutter-less technology
- Low-latency video streaming
- Multiple lens options
- Supports customization



## Easy Integration, Wide Application


Hikvision VOx Thermal Modules

**HIKVISION**<sup>®</sup>

# Thermal Module

## DS-2TM03/06-NF Series

- Vanadium Oxide Uncooled FPA
- 384 x 288 / 640 x 512 resolutions, NETD < 35 mK
- Frame rate: 25 fps
- Supports CVBS, BT.656
- Operating temperature: -40 to 65 °C
- Power consumption ≤ 1.3 / 1.8 W (TYP)
- Weight < 86 g
- Dimensions: 40 mm x 41 mm x 49 mm

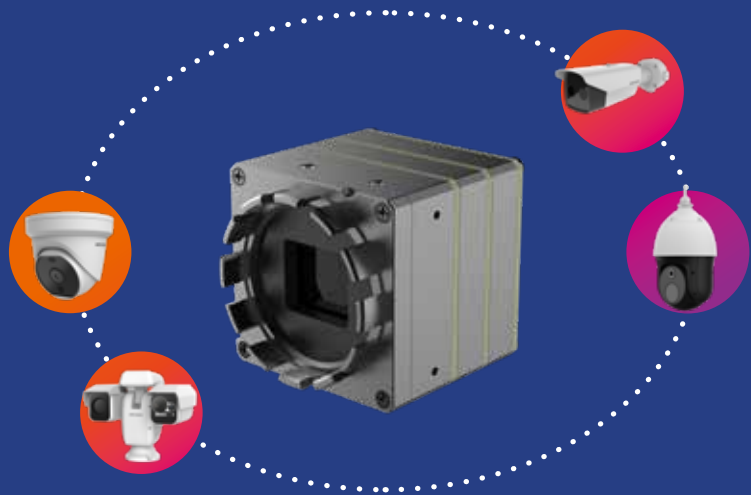

# Thermal Shutter-Less Module

## DS-2TM13/16-LF Series

- Vanadium Oxide Uncooled FPA
- 384 x 288 / 640 x 512 resolutions, NETD < 35 mK
- Frame rate: 25 fps
- Supports CVBS, BT.656
- Operating temperature: -40 to 65 °C
- Power consumption ≤ 0.8 / 1.3 W (TYP)
- Weight < 40 g
- Dimensions: 28 mm x 28 mm x 34.8 mm



Headquarters  
 No.555 Qianmo Road, Binjiang District  
 Hangzhou 310051, China  
 T +86-571-8807-5998  
 overseasbusiness@hikvision.com

