


PRODUCT PACKAGE FOR CONVENIENCE STORES

THIS PACKAGE ALSO APPLIES TO



Restaurants

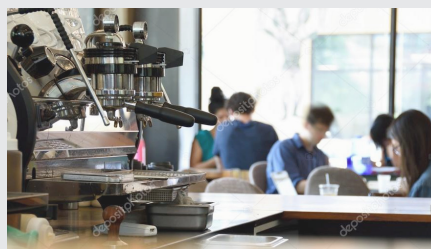

Coffee Shops



Gift Shops

SYSTEM HIGHLIGHTS AND INSTALLATION STRATEGIES

CASH REGISTERS

High Resolution,
IR, High Frame Rates

Monitors transactions and captures
incidents near register areas



DS-2CD2745G1-IZS

MONITORS & NVRs

24/7 Recording


A powerful yet easy-to-use system that provides clear video at up to 4K resolutions with abundant detail and POS information overlay.



DS-7608NI-12/8P



DS-D5028UC

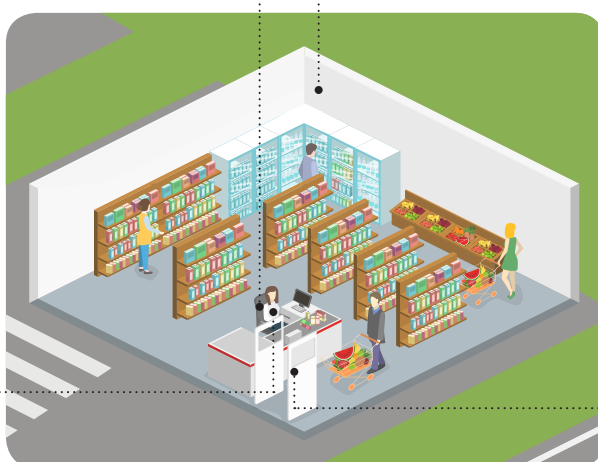

SHELVES

Mini PanoVu
WDR, Wide FOV, Compact Design

- WDR: Enables clear image capture even with strong backlight
- Wide FOV: 360° coverage
- Compact design: Blends into surroundings with its phone-sized housing



DS-2PT3326IZ-DE3

ENTRANCES & EXITS

WDR, IR, Waterproof

Cameras for entries and exits need to be able to capture clear facial features of people even under backlight. The camera should also be compact enough to be installed covertly




DS-2CD2745G1-IZS

HIGHLIGHTS


POS Information Overlay

When you want to review a specific transaction, now you can view the footage with POS information displayed on top. All the information is in one place!

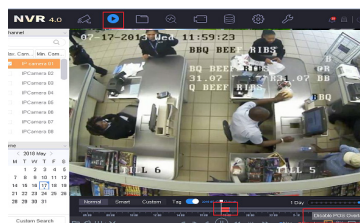


Easy Management from Your Phone

Add devices, view live images, play back footage, receive notifications – you can now easily operate and manage devices from your phone using Hik-Connect. Encrypted transmission ensures safety for your data.

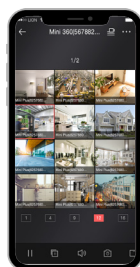

Mini PanoVu: Four Lenses


The powerful PanoVu Mini provides four channels of imaging with a housing not much larger than a phone.

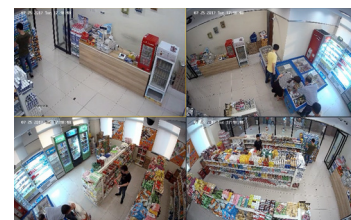

SYSTEM SETUP IN 6 STEPS

1. Select camera installation locations
2. Install HDDs in the NVR
3. Install cameras use a network cable to connect them to the PoE ports on the NVRs
4. Connect the NVR's HDMI interface to the display with HDMI cable
5. Configure recording schedule
6. Add NVR in Hik-Connect App

SYSTEM TOPOLOGY

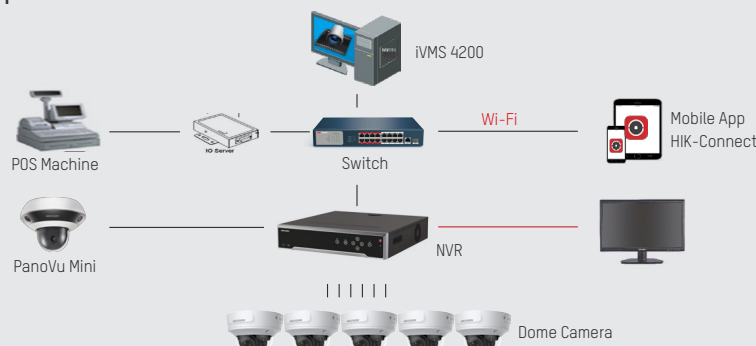

PRODUCT SELECTION

Device Model	DS-2CD2745G1-IZS Dome Camera	DS-2PT3326IZ-DE3 PanoVu Mini	DS-7608NI-I2/8P NVR	DS-D5028UC Monitor
Appearance				
Key Feature	<ul style="list-style-type: none"> 1/2.5" Progressive Scan CMOS ; 2688 × 1520@30 fps 2.8 to 12 mm motorized vari focal lens; H.265+, H.265, H.264+, H.264 4 Behavior analyses 120dB WDR IP67, IK10 IR range: up to 30 m Color: 0.008 lux @(F1.2, AGC ON), 0.011 lux @(F1.4, AGC ON), 0 lux with IR 	<ul style="list-style-type: none"> IR distance 10m, Fixed lens HF0V: single lens 128.5, PTZ lens angle of view: pan 350° tilt 0°-90° Motion Range: horizontal 350°, tilt 0°-90° 	<ul style="list-style-type: none"> Up to 12 Megapixels resolution recording HDMI Video output at up to 4K 8 independent PoE network interfaces are provided Supports various VCA detection alarm and VCA search Supports H.265+/H.265/H.264+/H.264/MPEG4 video formats 	<ul style="list-style-type: none"> Viewing Angle: 4K Monitor, 28" Supports: HDMI, VGA, DP
Number				
Price				