

# Network Keyboard 1100KI(B)

Version: V4.1.0

## **Release Note**

(2020-03-28)

Firmware	Software Version:	V4.1.0	
<b>Basic Information</b>			

### Reason of Upgrade

Add new functions and fix V4.0.2 known bugs.


### **Firmware update Functions**

### 1. 【support HikCentral V1.5.0】


Support connecting to HikCentral by HTTP or HTTPS protocol directly.

Support area management function in HikCentral.

Support switching between Main stream and Sub stream under the Hik-Central smart wall mode.

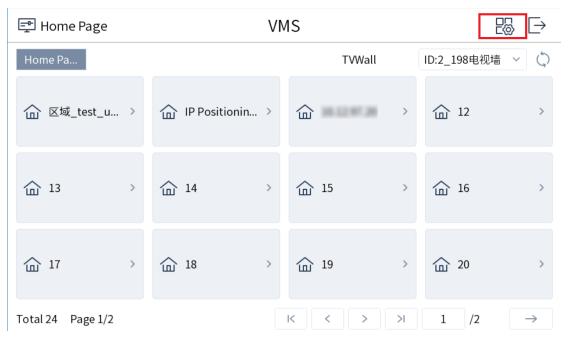




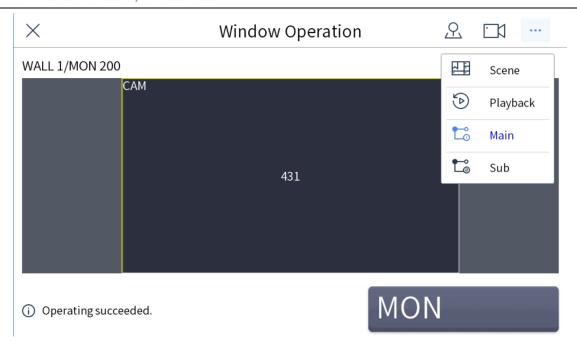

## 2. 【Support serial port function】


Support controlling DVR/NVR by serial port.
Support controlling analog dome/Matrix by serial port.

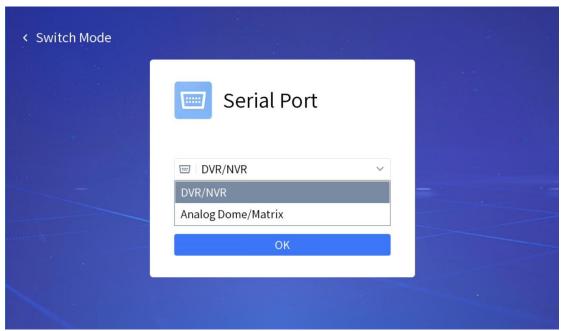

## 3. 【Add web client】


Support logging in the web client with https mode-.



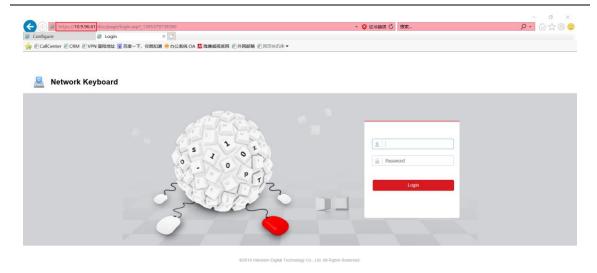

**덩**中 º, @ 🎍 🕾 🐮 🔡

Support configuring device management, input and output channel management.

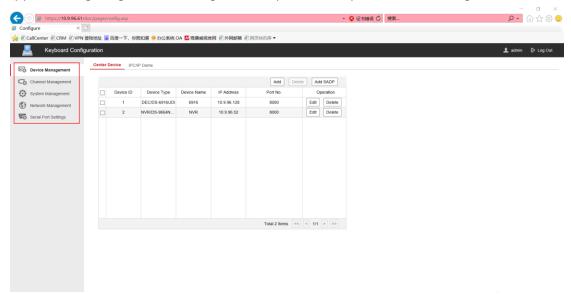

Support configuring system management on the website, including version information view, user management, system maintenance and security settings.




Support configuring local network management on the website, including dynamic and static



## settings.



Support configuring serial port RS485/232 information, including baud rate, parity, protocol

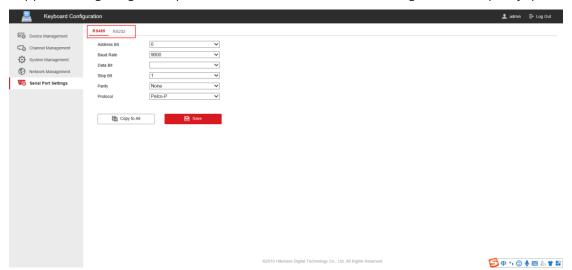

## **Note**

V3.1.2 does not support upgrading to 4.1.0



## **Remarks:**

- Hikvision reserves the right to change, alter or withdraw the above notification without prior notice.
- Product design and specifications are subject to change without prior notice.
- The Hikvision firmware may contain errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request.
- Hikvision is not liable for any typing or printing errors.

Hikvision Digital Technology CO., Ltd. No. 555 Qianmo Road, Binjiang District, Hangzhou 310051, China

Tel: +86-571-8807-5998 FAX: +86-571-8993-5635

Email: overseabusiness@hikvision.com