


Two Standalone Terminals Connect to One Lock

Operation Process

- 1) Wiring for standalone terminal.
- 2) Edit permissions.
- 3) Test.

Operation Steps:

1. Connect two terminals as below picture ;

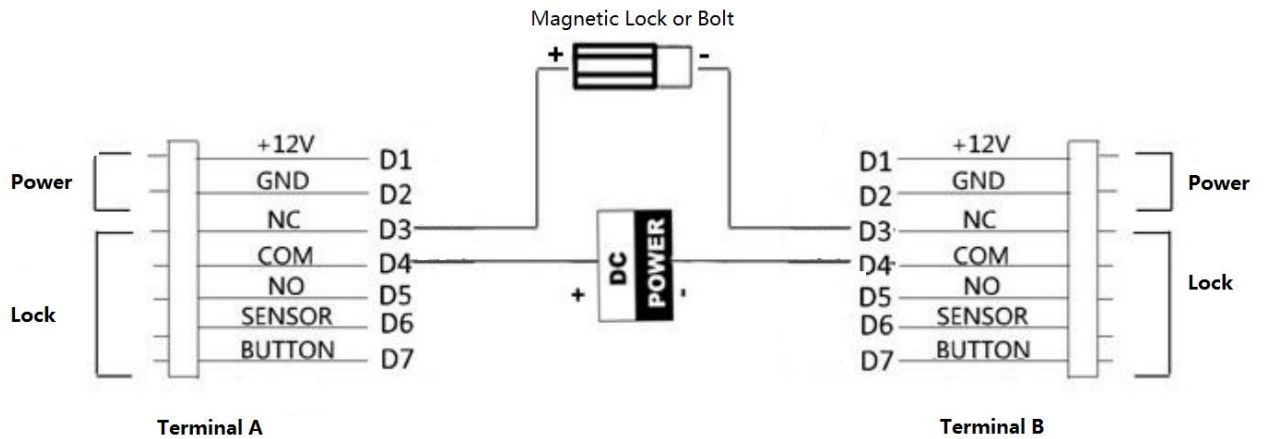

2. Add user data from local or sync from iVMS-4200 client software to two terminals ;
3. Swipe card on both terminals and check if the door can open normally.

Suitable Models:

Model	Description
DS-K1T105	Standalone Access Control Terminal
DS-K1T201	Standalone Access Control Terminal
DS-K1T8003	Standalone Access Control Terminal
DS-K1T804	Standalone Access Control Terminal
DS-K1T604/605/606/607	Face Recognition Access Control Terminal