

|                 |                            |                 |      |              |           |
|-----------------|----------------------------|-----------------|------|--------------|-----------|
| <b>Title:</b>   | How to preview HDMI camera | <b>Version:</b> | v1.0 | <b>Date:</b> | 3/19/2019 |
| <b>Product:</b> | Cameras                    |                 |      | <b>Page:</b> | 1 of 5    |

## Preparation

1. DS-2CD21x5G0-IMS.
2. Screw Driver x 1.
3. Displayer with HDMI input.
4. HDMI cable.
5. HDMI switch cable (Type D-to-Type A).

## How to preview HDMI camera

### 1. Loose screws to take part the bubble .



Figure 1

|                 |                            |                 |      |              |           |
|-----------------|----------------------------|-----------------|------|--------------|-----------|
| <b>Title:</b>   | How to preview HDMI camera | <b>Version:</b> | v1.0 | <b>Date:</b> | 3/19/2019 |
| <b>Product:</b> | Cameras                    |                 |      | <b>Page:</b> | 2 of 5    |



Figure 2



Figure 3

|                 |                            |                 |      |              |           |
|-----------------|----------------------------|-----------------|------|--------------|-----------|
| <b>Title:</b>   | How to preview HDMI camera | <b>Version:</b> | v1.0 | <b>Date:</b> | 3/19/2019 |
| <b>Product:</b> | Cameras                    |                 |      | <b>Page:</b> | 3 of 5    |

## 2. Wiring

Insert HDMI switch cable (Type D-to-Type A) and power on device.

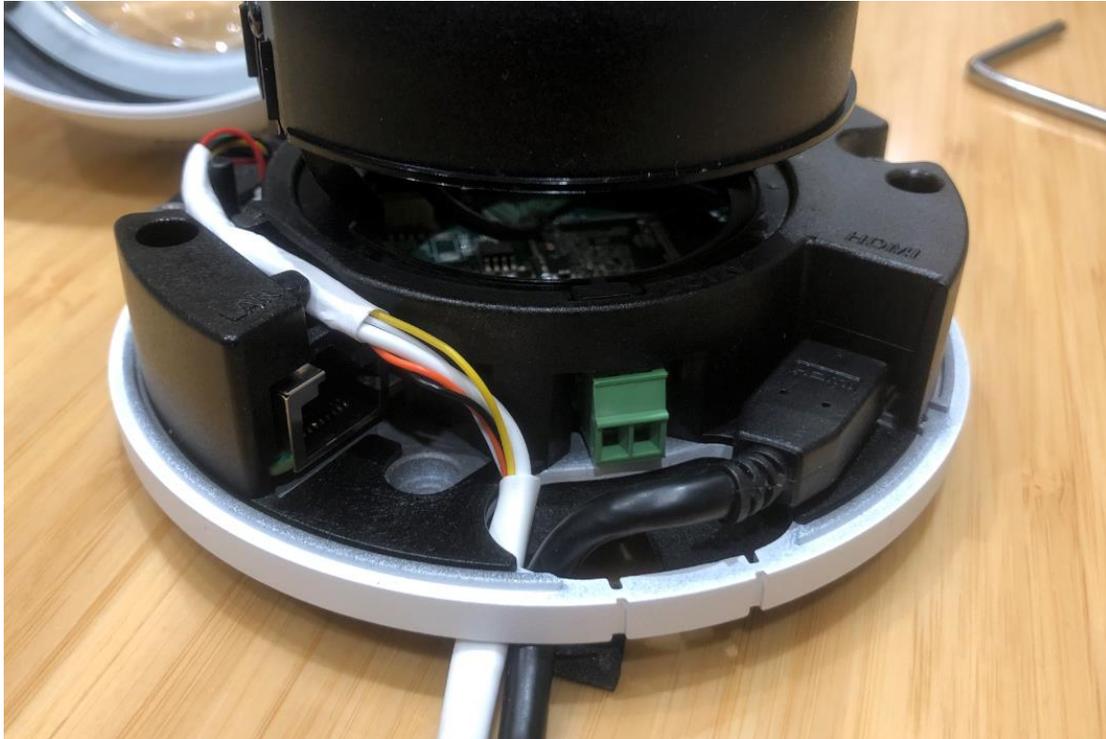


Figure 4

## 3. Preview

1) We can preview the image via HDMI when device is inactive.

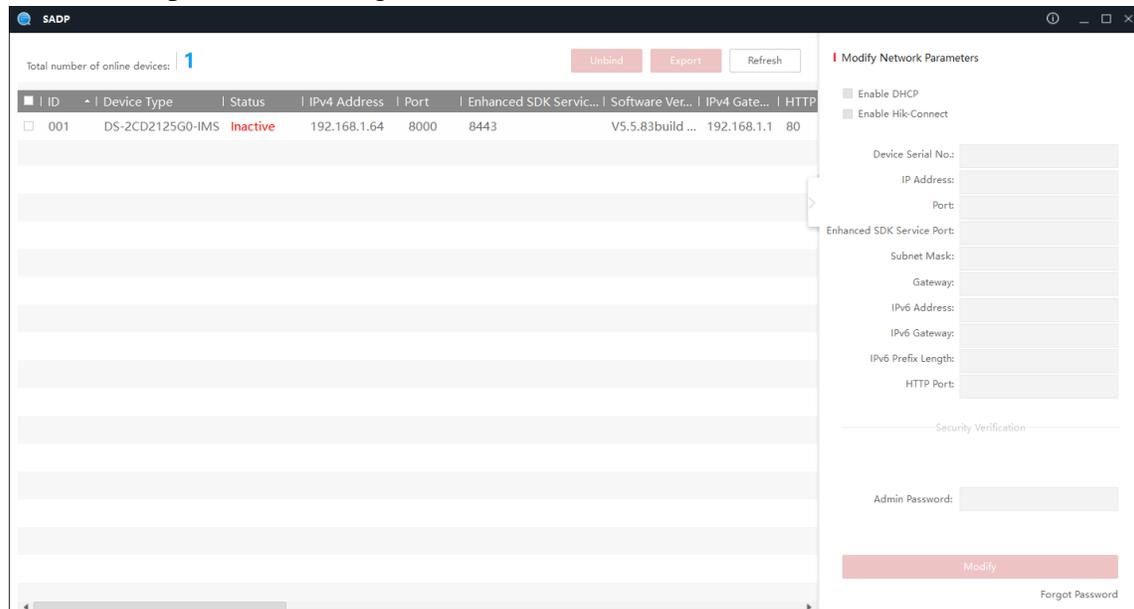


Figure 5

|                 |                            |                 |      |              |           |
|-----------------|----------------------------|-----------------|------|--------------|-----------|
| <b>Title:</b>   | How to preview HDMI camera | <b>Version:</b> | v1.0 | <b>Date:</b> | 3/19/2019 |
| <b>Product:</b> | Cameras                    |                 |      | <b>Page:</b> | 4 of 5    |

2) Connect camera to the displayer, then it will take a few seconds to show image on the displayer.



Figure 6

**Note:**

DS-2CD2125G0-IMS and DS-2CD2185G0-IMS only support 2MP HDMI output, it is not depended on resolution itself.

It supports enable/disable HDMI output and change resolution in the Image configuration.

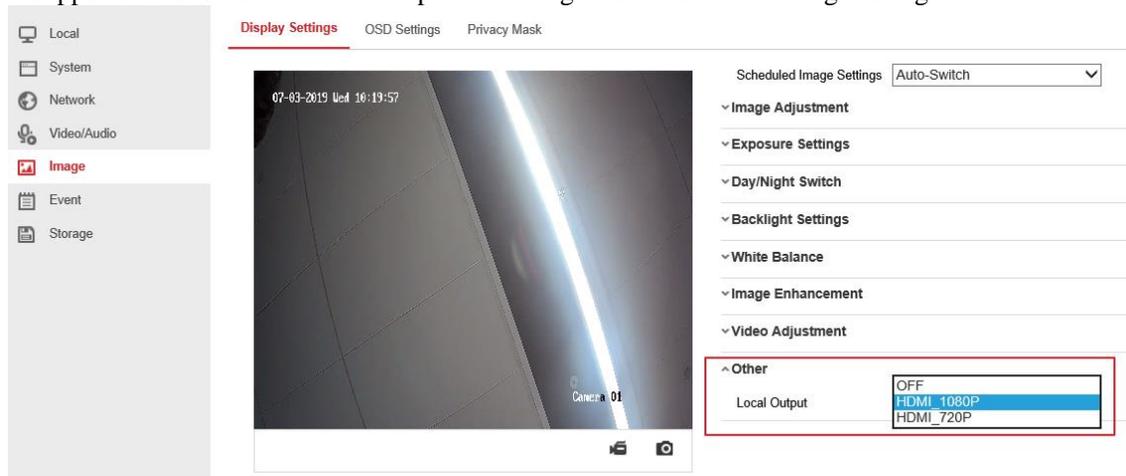


Figure 7



|                 |                            |                 |      |              |           |
|-----------------|----------------------------|-----------------|------|--------------|-----------|
| <b>Title:</b>   | How to preview HDMI camera | <b>Version:</b> | v1.0 | <b>Date:</b> | 3/19/2019 |
| <b>Product:</b> | Cameras                    |                 |      | <b>Page:</b> | 5 of 5    |

**First Choice for Security Professionals**  
***HIKVISION* Technical Support**