

DS-UPS1200-Q/T Backup UPS



- Built-in AVR
- Super fast charging
- Wide input voltage range
- Overload protection
- Short circuit protection
- Surge protection


▪ Specification

Model		DS-UPS1200-Q/T
Power	UPS Capacity	1200 VA / 720 W
Input	Input Voltage Range	140 VAC to 290VAC ±5VAC
	Input Frequency	50/60 Hz self-adaptive
	Plug Type	UK version: UK TYPE G plug EU version: Schuko plug
Output	Output Frequency	50/60 Hz self-adaptive
	Transfer Time	typical 2-6 ms, 10 ms max
	Waveform	Simulated Sine Wave
	Output Voltage Range	198VAC to 242VAC
	Outlet Type	Universal
	Outlet Number	4
Battery	Battery Type	12 V/7 Ah *2 pcs, lead-acid battery
	Recharge Time	4-6 hours recover to 90% capacity
	Typical Backup Time	Run time at 60w: 100 min Run time at 150w: 31 min Run time at 300w: 11 min
Interface	Communicate Ports	No
Protection	Full Protection	Short circuit, Surge protection, Overload protection, Overcharge and overdischarge protection
Indicator	Display	LED
	Alarm	Charging Mode (DC mode): Sounding every 6 seconds Low Battery: Sounding every second Overloading Mode: Sounding every 0.5 seconds Fault: Continuously sounding
General	Operating Temperature	0 °C to 40 °C (32 °F to 104 °F)
	Operating Humidity	0% to 90% (non-condensing)
	Dimension	312 mm × 122 mm × 195 mm (12.28" × 4.80" × 7.68")
	Weight	Approx. 8.6 kg (18.96 lb)

▪ Available Model

DS-UPS1200-Q/T

▪ Dimension

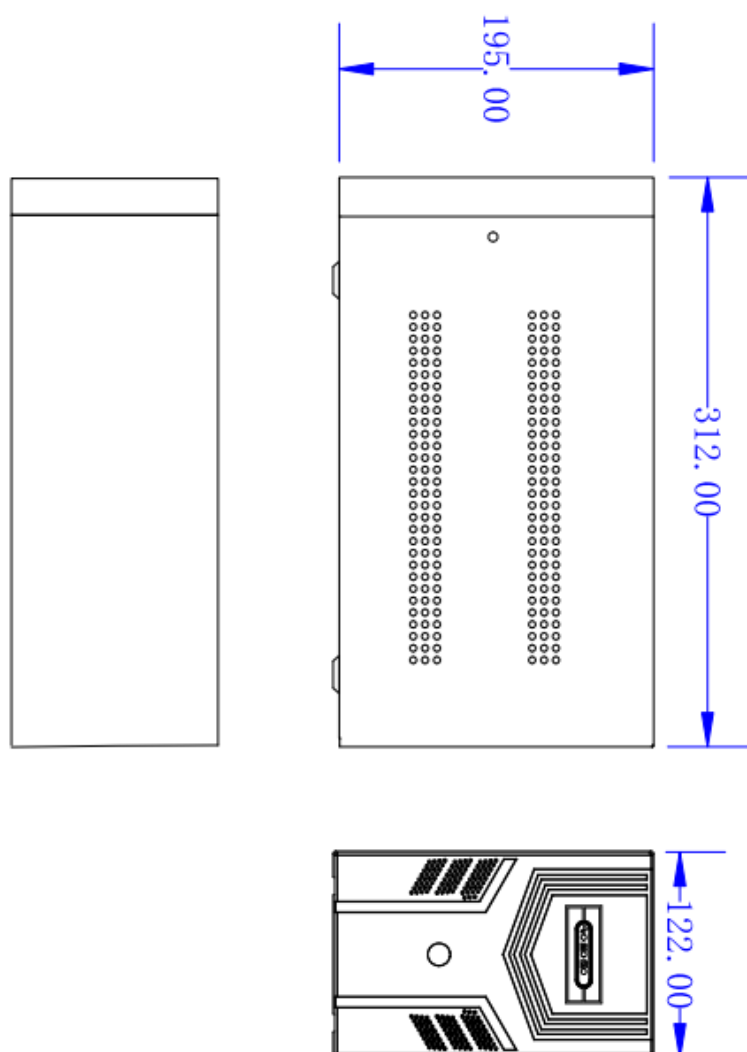





See Far, Go Further



www.hikvision.com
support@hikvision.com

