

DS-KHH6020X-H Audio Bedhead Terminal with Handle



- One-button calls (and handset calls) the center station directly with two way audio intercom
- Multi-buttons and handset support different call types (call, dressing change and cancellation)
- Support wired access to the bathroom emergency alarm button
- 4 alarm zones supported
- Power supply: 12VDC, or POE with POE converter


▪ Specification

System parameters	
Operation system	Linux
ROM	16 M
Audio parameters	
Audio input	Built-in omnidirectional microphone, external speaker
Audio compression standard	G.711U
Audio output	Built-in SPK
Audio compression bitrate	64 Kps
Audio quality	Noise suppression and echo cancellation
Network parameters	
Network protocol	TCP/IP, SIP, RTSP
Device interfaces	
Alarminput	4
Network interface	1*RJ45
TF card	Not Support TF card
General	
Installation	Wall mounting
Working temperature	-10°C ~ 50°C
Working humidity	10% to 95% (no-condensing)
Dimension (W × H × D)	86mm x 86mm
Application environment	Indoor
Power consumption	≤ 4 W
Power Supply Output	12 VDC

▪ Available Model

DS-KHH6020X-H

▪ Dimension

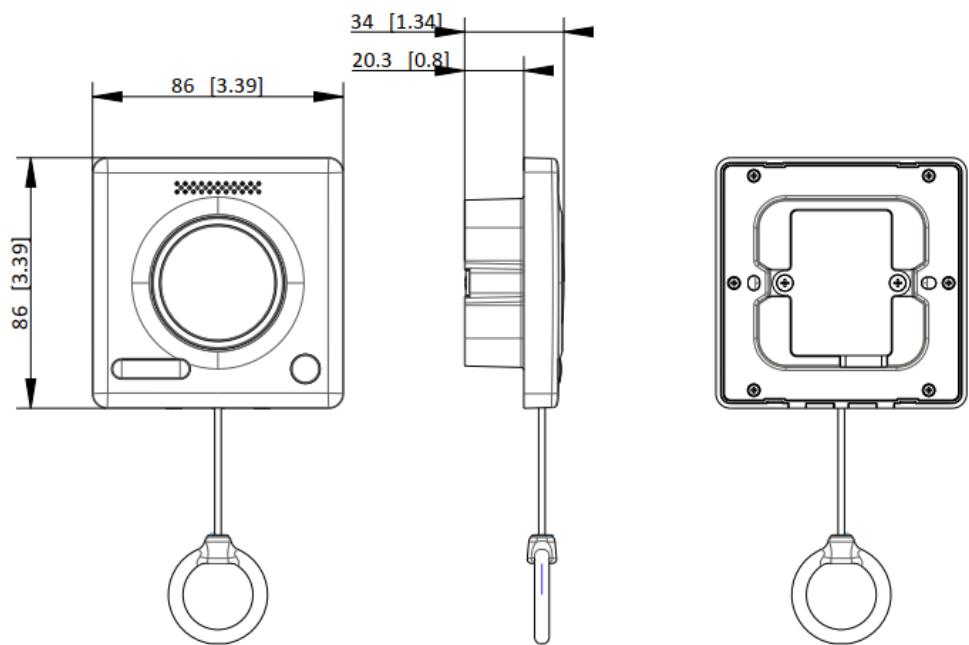

Unit:mm [inch]

SCALE	1:1
-------	-----

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®