

DS-KLM28-12**Smart cabinet - main module (8 inch touch screen)**

- Integrates face verification, liquid crystal display, touch interaction, card reading, voice, lock control, electromagnetic lock, etc.;
- Based on the Internet of Things technology, AI technology, computer communication technology;
- Max Qty of sub-cabinets: 16
- Operating system: Android OS
- Screen: 8-inch IPS touch screen, resolution 800*1200
- Authentication: Face, M1 card, password;
- Open method: authentication, remote control, mechanical key and one-click full opening (only for administrator) to open the cabinet;
- Capacity: 20,000 faces, 200,000 cards, 100,000 events
- Communication: LAN, WIFI
- Dimension: 970mm*477mm*1,880mm (Width*Depth*Height)
- Working mode: Guest mode, Private mode and Hybrid Mode (Guest+ Private)
- Cabinet allocation: one person to one grid, one person to multiple grids and multiple people to one grid. The allocation supports all cabinet grid allocation, free cabinet grid allocation, and designated cabinet grid allocation.
- Advertisement: supports carousel standby screen pictures (up to 5 pictures).
- Plan template: supports to configure device usage plan templates, set open and disabled time periods for access operations, contains one weekly plan template and seven holiday plan templates.
- Time calibration function: built-in RTC, supports NTP time calibration, manual time calibration and automatic time calibration.
- Data storage: When the power is off, the cabinet keeps its original state and saves the data automatically; the cabinet will work normally even offline, and events resumes transmission after the network is connected.
- Camera: 2M pixels, wide dynamic range and low light binocular camera;
- Audio: audio input and output, built-in omnidirectional microphone and speaker;


▪ Parameters

| | |
|-------------------------|-------------------------------------|
| Screen | 8 inch |
| Size | 8 inch |
| Operation method | |
| Network interface | 1 RJ45, 10/100/1000 M self-adaptive |
| RS-485 | 1 |
| General | |
| Power supply | 100~230 VAC |
| Working temperature | -10°C~50°C |
| Net Weight | 50kg |
| Protective level | Indoor |

▪ Available Model

DS-KLM28-12

▪ Dimension

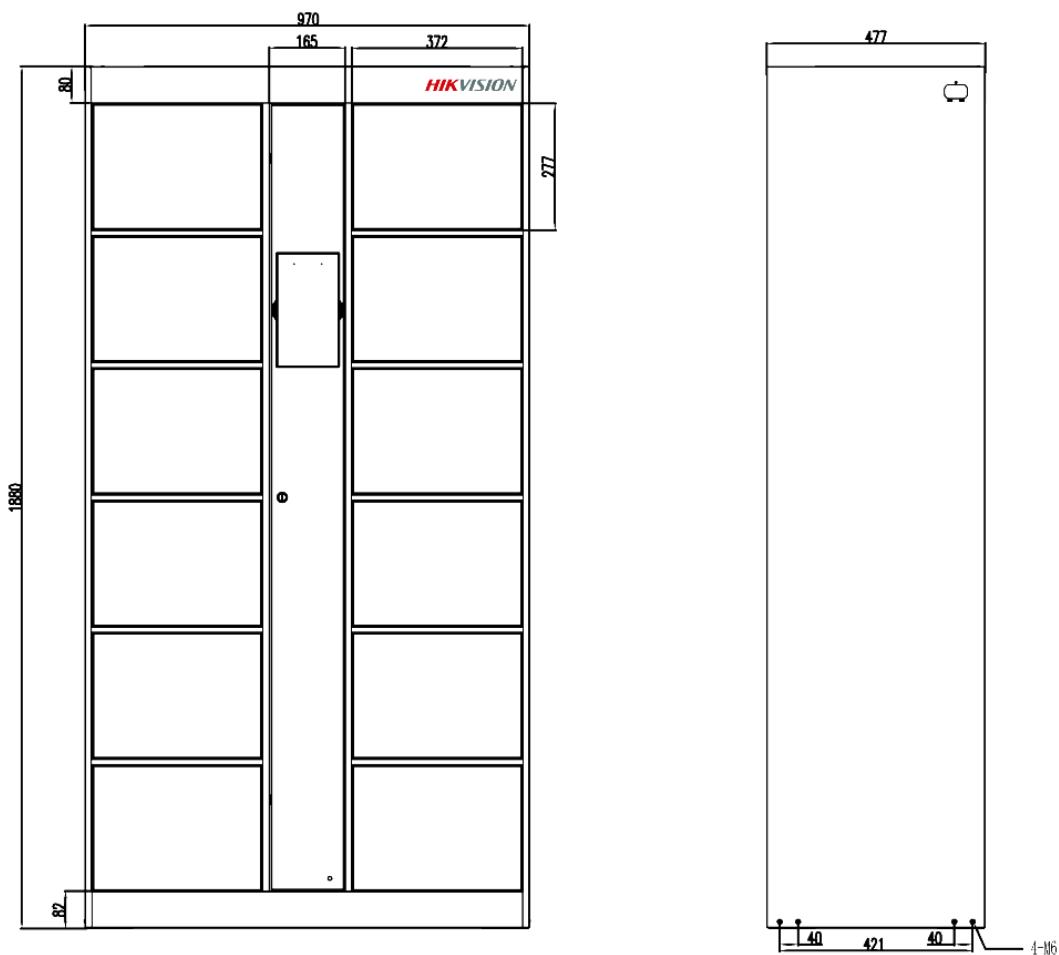

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan

Hikvision UAE
T +91-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent

Hikvision Russia
T +7-495-669-67-99
salru@hikvision.com

Hikvision Korea
T +82-0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia